




8 Ports Fast Ethernet PoE Switch



Manual
DN-95323


8 Ports PoE Ethernet Switch

8 ports PoE Ethernet Switch is a surveillance security Ethernet switch which aims at Ethernet high definition surveillance, Ethernet project security system. The product fully combines the characteristic of surveillance security, provides fast packet forwarding ability and abundant backplane bandwidth, which ensures clear image and fluent transmission. Inserted static, surge protection circuit can improve product stability. The product supports one key VLAN mode, can achieve VLAN, QoS priority after configuration, control the Net storm, protect the information security, prevent the viral transmission and Ethernet attack, fully satisfy the Ethernet video surveillance security system and Ethernet project needs.

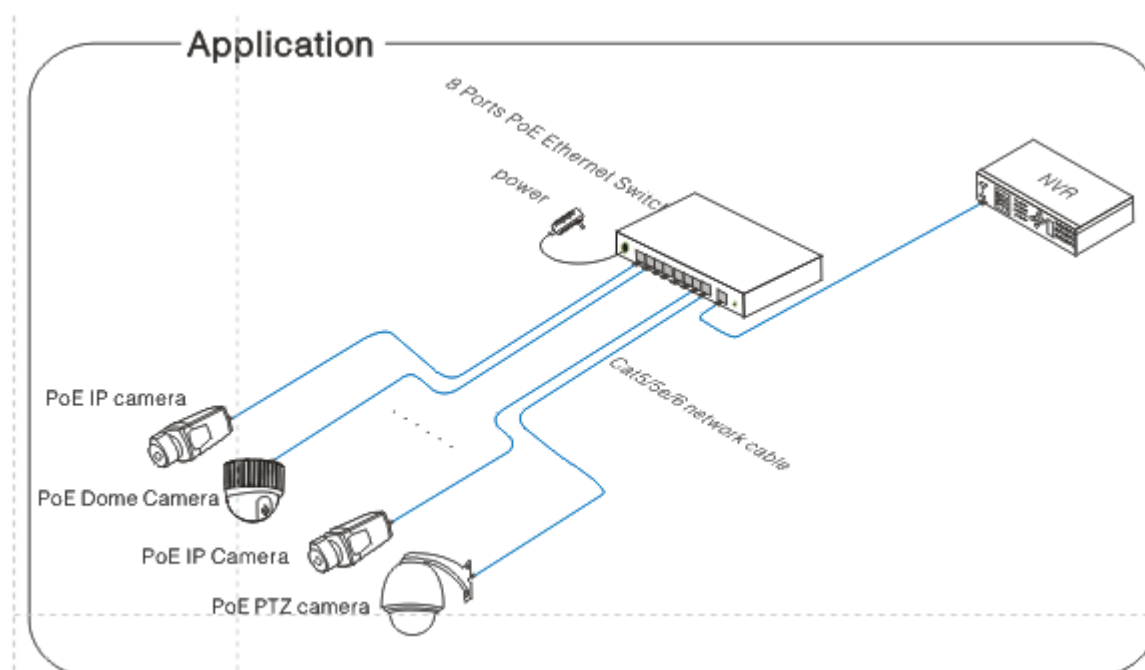


Feature

1. Major ports: 1 pc 100Mbps up link Ethernet port, 8 pcs 100Mbps down link Ethernet ports , every port supports MDI/MDIX;
2. Special function: One key VLAN mode;1~8 downlink ports can only communicate with uplink port;
3. Power input: DC48V~57V;
4. Transmission Distance: 0~100m;
5. Standard: Meet IEEE802.3, IEEE802.3u, IEEE802.3 af/at standards,
6. PoE use End-Span, the spare cable can be of other use;
7. Protection: Excellent anti-thunder, anti-static and anti-interference ability;
8. Appearance: Delicate design and easy installation, configure the anti-theft lock hole, guard against theft;
9. Operation: Plug and Play, No Setting required.

 Notice The transmission distance is related to the connected cable. We suggest standard Cat5e/6 network cable, so the transmission distance cans up to 100m!

Board Diagram

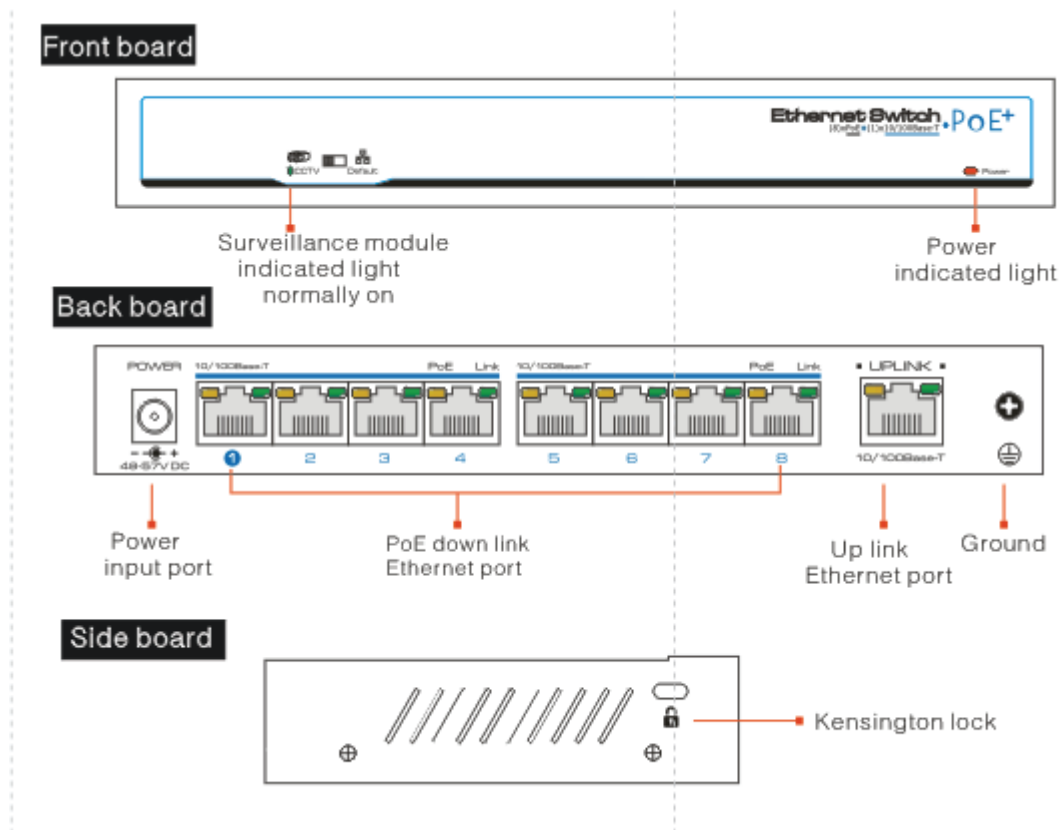

Description

- 1) The equipment must connect the ground according to the request.
- 2) Turn the dial switch for left, the equipment can enter surveillance module after providing equipment power.

■ Installation steps

Please check the following items before installation, if it is missing, please contact the dealer. Please check the following items before installation, if it is missing, please contact the dealer.

8 ports PoE Ethernet Switch	1pc
Power adaptor	1pc
AC power cable	1pc
Accessory	1set
User manual	1set

Please follow below the installation steps:

1. Please turn off the signal power and display device power before installation; installation with power will damage the transmission equipment
2. Use network cable connect PoE IP camera and 1~8 down link ports of product respectively
3. Use a network cable connects equipment up link port and NVR or computer
4. Turn on the power of the equipment
5. Check if the installation is correct, equipment is in good condition, the connection is stable, then provide power for system
6. Ensure the Ethernet equipment with power and work properly.

Specification

	Item	Description
	Model	8 Ports PoE Ethernet Switch
Power	Power Supply	Power Adaptor Input
	Voltage Range	DC48V-57V
	Consumption	The Equipment<5W,PoE output<120W
Ethernet	Speed	1-8 Ethernet Port: 10/100Mbps Uplink Port: 10/100Mbps
	Transmission Distance	Down Link Port:0-100m Uplink Port:0-100m
Network Switch	Ethernet Standard	Support IEEE802.3/802.3u/802.3x/802.1p/802.1q/IEEE802.3af/at
	Backplane Bandwidth	1.8G
	Packet Forwarding Rate	1.34Mbps
	Packet Buffer	768k
Status Indicator	MAC	2k
	Power Light	1 pc(red)
	Ethernet Port Light	RJ45port 2 pcs yellow Indicates PoE, green Indicates Act/link
Protection Level	Surveillance Module Light	1 pc(green)
	Pluse Group	Level 2 Standard:IEC61000-4-4
	ESD	1a Contact Discharge Level 2 1b Air Discharge Level 2 Standard : IEC61000-4-2
Working Environment	Anti-thunder Level	Level 2 Standard : IEC61000-4-5
	Working Temperature	0°C ~ 55°C
	Storage Temperature	-40°C ~ 85°C
Mechanical	Humidity(Non-condensing)	0 ~ 95%
	Dimension(L*W*H) Include Port	200mm*105mm*27mm
	Out Shell	Galvanized Sheet
	Color	Black
Stability	Weight	500g
	MTBF	≥50000h

Product is subject to change without prior notice.

■ **Trouble Shooting**

1. Make sure the equipment is installed according to the manufactures installation guide.
2. Confirm RJ45 cable order meets EIA/TIA568A or 568B standard.
3. Every PoE port can provide PoE equipment maximum power less than 30W,
4. Please do not connect the PoE equipment with power over 30W.
5. Replace the equipment that cannot work with a proper functioning 8 ports PoE Ethernet switch to check if the equipment is damaged.
6. Please contact your vendor if trouble still exists.