


# ● PC COM 8 PORT RS-232/RS-422 CARD USER MANUAL



We provide software development tool kit package for free every shipment

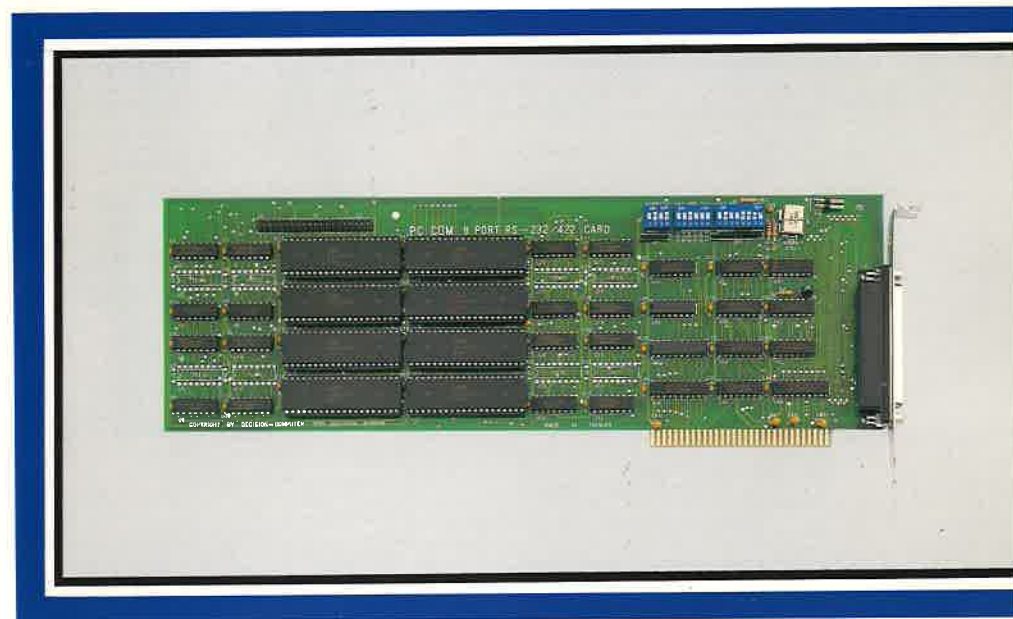

#### Features:

- Send remote message to "FAXER" (BB CALL) with the use of Client/Server function.
- Transmit remote "VOICE MAIL" to telephone or portable phone with use of Client/Server function.
- Receive remote incoming phone call and play message with the use of Client/Server function.
- Transmit remote (TMMF) (QUAL TONE MULTI-FREQUENCY) with the use of Client/Server function.
- Transmit and receive remote message to FAX with the use of Client/Server function.



#### Features:

- Send message to "FAXER" (BB Call).
- Send and receive "VOICE MAIL" from computer to telephone or portable phone.
- Send and receive E-MAIL.
- Send and receive FAX.
- Receive TMMF.
- OX software accessory for Windows 95/98/NT.
- Standard COM2 and Decision Computer PC COM TeleCom 2/4/8 port RS-232 multi-serial card.



#### Features:

- DII-Decision Industrial Interface: Device Driver for Decision Industrial Card for Windows 95, 98, NT environment.
- DIC-Decision Industrial Controller: Software development tool kit which provides remote industrial control function via internet and World Wide Web (WWW).
- Turn-Point: Application software for remote temperature and humidity and digital input/output control.



#### Features:

- PC COM RemoteCom is an OX programming development tool for application software. That will use to enhance RS-232/422 serial communication through Internet by stand-alone program or by browser through World Wide Web (WWW) under Windows 95/98/NT.
- PC COM RemoteCom provides 1 to 16 RS-232 serial communication port, which link the computer and RS-232/422 serial peripheral device such as terminals, modems, RS-232 serial printer, card reader, plotters, etc.
- User may call OX functions to communicate with RemoteCOM built Server and Client using Internet communication; or encapsulate OX function and remote serial ActiveX Control, then run development application program under Internet browser (IE and Netscape).



#### Features:

- All UART parameters are fully configurable.
- Review received data.
- Save received data.
- Monitor data of one or both devices at same time.
- Monitor all signals of one or both devices at same time.
- Monitor the interaction of both devices (Monitor mode).
- Monitor data and signals transparently (Transparent mode).



#### Software Development Tool Kits

(Using E-Mail Address to Find IP Address For Windows 95/98/NT)

# PC COM 8 PORT SERIAL ADAPTER OPERATION MANUAL



**DECISION**  
Computer International Co., Ltd.

# TABLE OF CONTENTS

## CHAPTERS

1. Introduction.....	1
2. Unpacking Information.....	3
3. System Requirements.....	4
4. Hardware Installation .....	5
5. Switch Settings.....	6
6. RS232 and RS422 Cabling Information.....	19
7. Interrupt Latch Address.....	26

## APPENDICES

A. PCCOM Diagnostics Under MS/DOS .....	27
B. PCCOM98 Device Driver for MS/DOS.....	28
C. XENIX/UNIX Configuration .....	30
D. MS/WINDOWS Configuration for version 3.x .....	38
E. WINDOWS/95 Configuration .....	42
F. OS/2 Configuration .....	44
G. WINDOWS/NT Configuration for version 3.51 up .....	48
H. Concurrent DOS Configuration .....	51
Multi-user (Dr.) DOS Configuration	
I. Pick Configuration .....	52
J. Linux Configuration .....	54
K. Warranty Information .....	55



## CHAPTER 1

### INTRODUCTION

The PCCOM 8 port adapter provides eight asynchronous serial communication ports (RS232 or RS422), which link the computer and serial peripheral devices such as terminals, modems, serial printers, plotters, ... etc.

The PCCOM 8 port adapter is particularly suited to facilitate the connection of terminals (VDUs) in multi-user operating systems. Each board is supplied complete with many kinds of connectors.

The PCCOM board may be installed in any IBM PC/AT, PC/386, PC/486, Pentium or hardware compatible systems. To accommodate a variety of operating systems three switch banks permit maximum flexibility of configuration. You may select which interrupt (IRQ2 - IRQ7), I/O address, and interrupt vector you desire.

The PCCOM 8 port board can be used to plug in 8250, 16450, 16550, or 16650 chips, and the PCCOM98 device driver can detect it automatically. There are two kinds of board can be choose, one is normal speed card that its baud rate up to 115200, another is high speed card that its baud rate up to 460K.

#### **The features of the PCCOM 8 port adapter are:**

- Eight RS232 or RS422 ports for asynchronous communications.
- Suitable for XENIX/UNIX (SCO, AT&T, Interactive, UNIXWARE), MS/DOS, WINDOWS/NT, WINDOWS/95, OS/2, MS/WINDOWS, PICK, CONCURRENT DOS, QNX, PROLOGUE, MUMPS, ... etc.






- IBM PC/AT, PC/386, PC/486, Pentium hardware compatibles.
- Interrupt selectable. (IRQ2 - IRQ7)
- Interrupt vector address selectable.
- ARNET 8 multi-port card compatible.
- I/O address selectable.
- Auto-detect 16450 or 16550 or 16650 chips on board.
- Baud rate up to 115200 for normal speed board and up to 460K for high speed board.



## CHAPTER 2

### UNPACKING INFORMATION

 **Check that your PCCOM package includes the following items:**

- PCCOM 8 port adapter.
- User manual.
- PCCOM98 software.
- Connector.

Select one of follow items.

1. DB25 connector.
  2. DB9 connector.
  3. RJ-11 connector.
  4. Expansion box with DB25 connector.
- Warranty form.

## CHAPTER 3

### SYSTEM REQUIREMENTS

☞ **Before installing your PCCOM 8 port adapter, make sure that:**

- The host computer is an IBM PC/AT, PC/386, PC/486, or Pentium compatibles.
- The three switch blocks are correctly configured to coincide with the operating system you are using.
- The operating system you intend to use is capable of driving multiple serial ports.

## CHAPTER 4

### HARDWARE INSTALLATION

Your PCCOM 8 port adapter is designed to be inserted in any available slot in your PC/AT, PC/386, PC/486, Pentium or compatibles. In order to gain access to the expansion slots, follow the steps listed below:

1. Turn off all power to your computer and all peripheral devices before installing your PCCOM 8 port adapter.
2. Remove the cover of the computer.
3. Insert the pre-configured PCCOM 8 port adapter into any available slot. Make sure the adapter is firmly seated in the chosen slot.
4. Replace the cover of the computer.
5. Connect cables to eight RJ11, DB9, or D25 connectors as required.

## SWITCH SETTING

The three switch blocks and two jumpers on the PCCOM 8 port adapter must be configured correctly in accordance with the operating system you are using.

Determines the I/O address of the UARTs.

Selects which interrupt will be used in the range IRQ2 through IRQ7.


Selects the interrupt vector address and determines which port is active when an interrupt occurs.

Select master or slave board.


Daisy chain jumper for installing more than one boards which use the common IRQ.

All addresses specified are in hexadecimal. The actual interrupt latch address is set to the interrupt vector address set by switch 3 + 2H.

**PC COM 8 PORT RS-232 CARD  
RJ-11 BOARD**

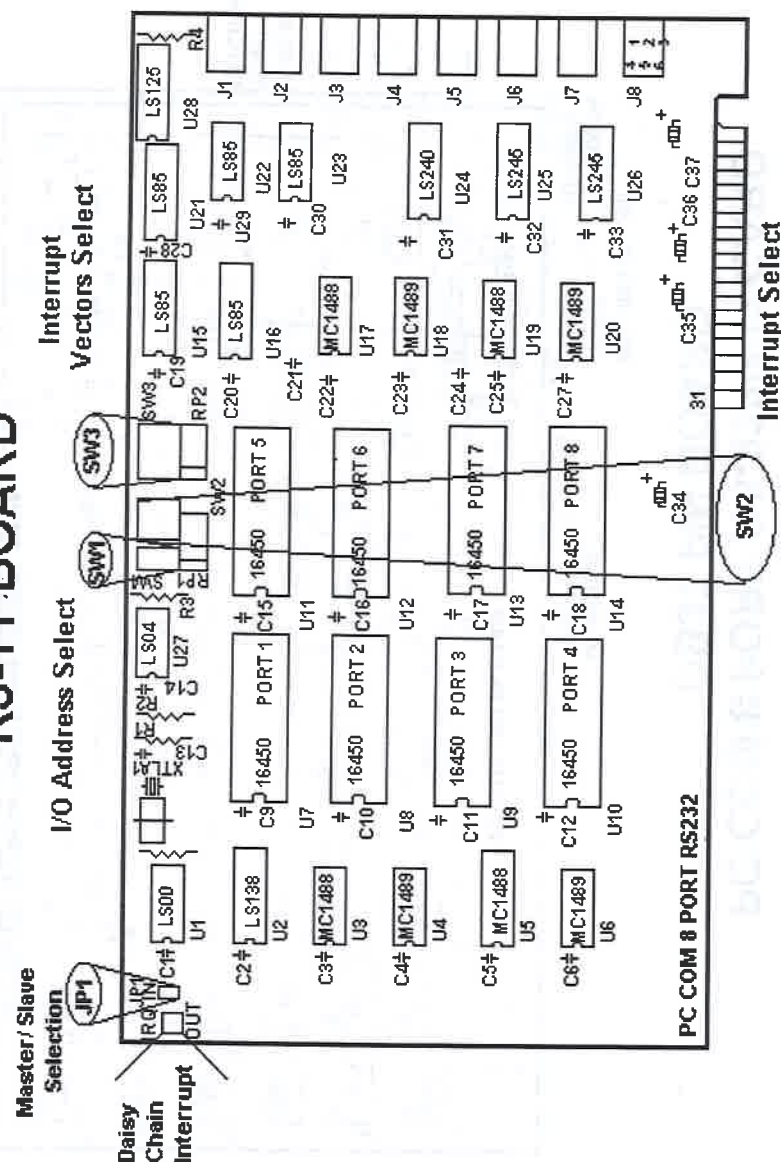

# PC COM 8 PORT RS-232/422 CARD DB37 PIN BOARD

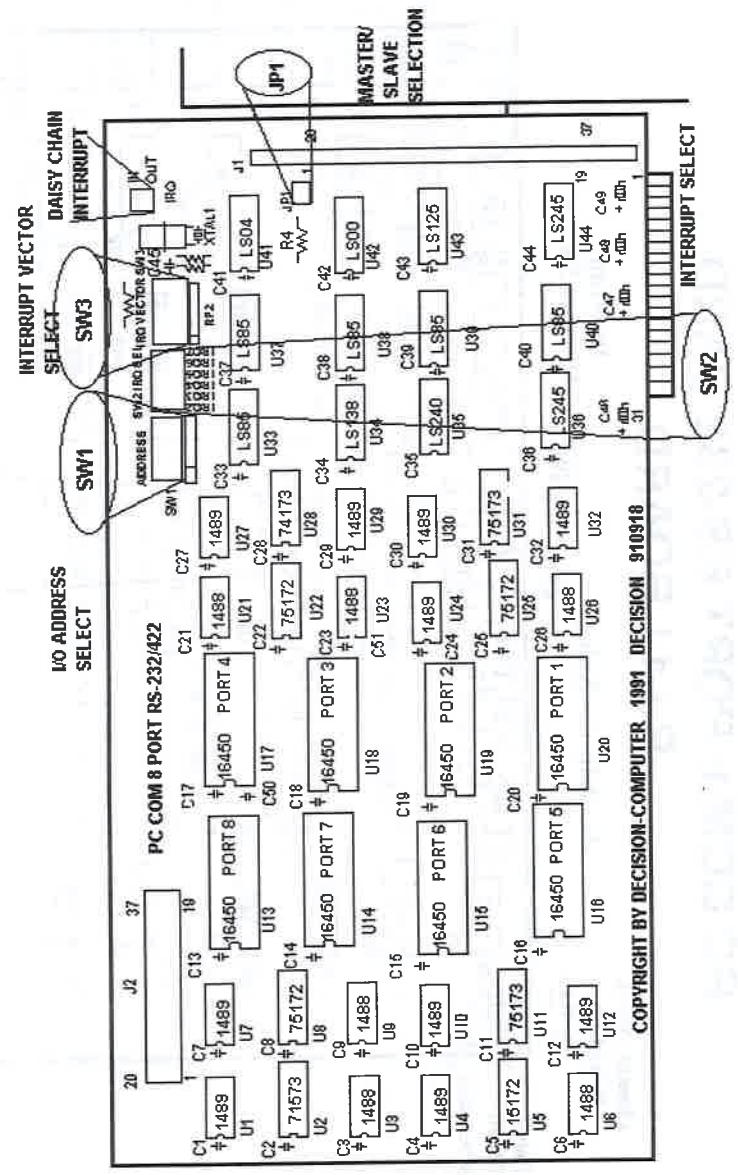

## 5.2 Selection of Switch Settings








It is important to refer to the user manual supplied with your operating system to determine the correct configuration. Although we provide installation advice for various operating systems, it is not possible to cover all systems in this user guide. Please contact your supplier if you have any difficulties with configuration.

**IMPORTANT:** CARE MUST BE TAKEN IN SELECTING THE CONFIGURATION OF SWITCHS TO ENSURE YOU DO NOT DUPLICATE SETTINGS OF OTHER EQUIPMENT ALREADY INSTALLED IN YOUR COMPUTER. DUPLICATION OF SETTINGS WILL RESULT IN A MALFUNCTION OF ONE OR BOTH DEVICES.

Please refer to the following settings for each switch block. If you are installing more than one board, do not duplicate jumper settings for any parameter.

# I/O PORT ADDRESS (UART ADDRESS)

## SWITCH 1




**NOTE:** The address selected must start on a multiple of 40H. A block of 40H contiguous I/O locations will be used starting from the selected address.

The I/O port addresses corresponding to each port are shown in the following.


PORT	ADDRESS
1	BASE to BASE+07
2	BASE+08H to BASE+0FH
3	BASE+10H to BASE+17H
4	BASE+18H to BASE+1FH
5	BASE+20H to BASE+27H
6	BASE+28H to BASE+2FH
7	BASE+30H to BASE+37H
8	BASE+38H to BASE+3FH

# INTERRUPT (IRQ)


## SWITCH2




IRQ2



IRQ3




IRQ4



IRQ5



IRQ6



IRQ7

# INTERRUPT VECTORS

## SWITCH 3



000H



010H



020H



030H




040H



050H



060H



070H



080H



090H



0A0H



0B0H



0C0H




0D0H



0E0H




0F0H



100H




110H




120H



130H



140H




150H




160H



170H



180H



190H




1A0H



1B0H




1C0H



1D0H




1E0H



1F0H




200H




210H



220H




230H



240H




250H




260H



270H




280H



290H



2A0H



2B0H



2C0H



2D0H




2E0H




2F0H




300H




380H




OFF




310H




390H




320H




3A0H



330H




3B0H



340H




3C0H




350H



3D0H




360H



3E0H



370H



3F0H

### 5.3 Daisy Chain Interrupt

The daisy chain interrupts function provides more than one PC COM 8 port board to use the common interrupts.

The JP1 is used to identify master or slave board, and the JP2 (IN/OUT) is used to connect daisy chain.


#### JP1: Select master or slave



JP1	Board
Short	Master
Open	Slave

Suppose you used one common interrupt to serve 24 ports, it must select one board as master board that generates interrupt, and the other two boards as slave. It shows how to connect daisy chain interrupt in the following.

## DB37 Pin Board

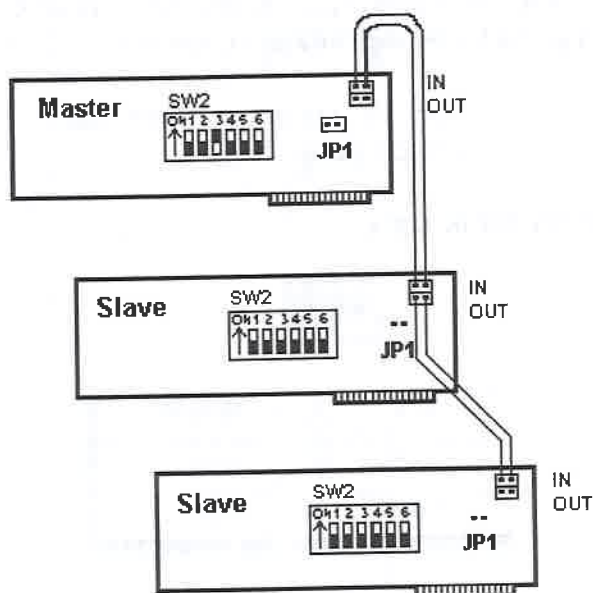


NOTE THAT, WHEN THE DAISY CHAIN FUNCTION IS USED, ONLY SET INTERRUPT (SWITCH 2) ON MASTER BOARD, DO NOT SET IRQ ON SLAVE BOARD.

## CHAPTER 6

## RS232 &amp; RS422 CABLING INFORMATION

## 6.1 RJ11 Connector

The communication interface follows the EIA RS232C standard. Each RS232 port has one RJ-11 female connector for connection to a peripheral device. The board-mounted female RJ-11 pin identification is shown in the following:



Pin #	RJ - 11 SIGNAL NAME	RS -232C NAME	SIGNAL DIRECTION
1	Chassis Ground (GND)	AA	Common
2	Signal Ground (SG)	AB	Common
3	Transmit Data (TxD)	BA	Output
4	Receive Data (RxD)	BB	Input
5	Clear to Send (CTS)	CB	Input
	Data Set Ready (DSR)	CC	Input
6	Data Terminal Ready (DTR)	CD	Output


The RJ-11 to DB25 expansion cable assignment is shown in the following:

RJ-11 Pin #	SIGNAL	DB25 Pin #
1	GND	1
2	SG	7
3	TxD	2
4	RxD	3
5	DSR & CTS	5,6
6	DTR	20

To connect PCCOM 8 port adapter to other DATA TERMINAL EQUIPMENT (DTE) devices, the developers recommend the following connection method.

**RJ-11 Signal**

GND  
SG  
TxD  
RxD  
CTS&DSR  
DTR


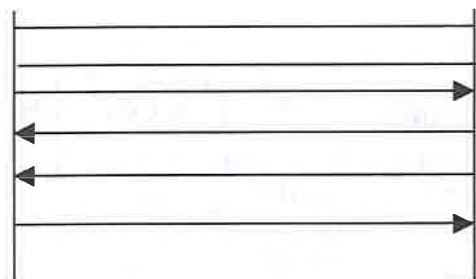
**Terminal Signal**

GND  
SG  
RxD  
TxD  
DTR  
CTS&DSR


**6.2 DB25 Connector**

The communication interface follows the EIA RS232C standard. The signal assignments for a standard DB25 connector are shown below:

DB25 Pin #	Signal Name	RS-232C Name	Signal Direction
1	Chassis Ground(GND)	AA	Common
2	Transmit Data(TxD)	BA	Output
3	Receive Data(RxD)	BB	Input
4	Request to Send(RTS)	CA	Output
5	Clear to Send(CTS)	CB	Input
6	Data Set Ready(DSR)	CC	Input
7	Signal Ground(SG)	AB	Common
8	Data Carrier Detect(DCD)	CF	Input
20	Data Terminal Ready(DTR)	CD	Output

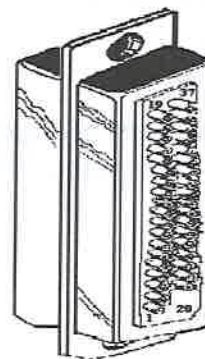**37 – PIN D-SHELL****25 – PIN D-SHELL**

To connect the PCCOM 8 port adapter to other DATA TERMINAL EQUIPMENT (DTE) devices, we recommend using a DTE to DTE connection as shown below:

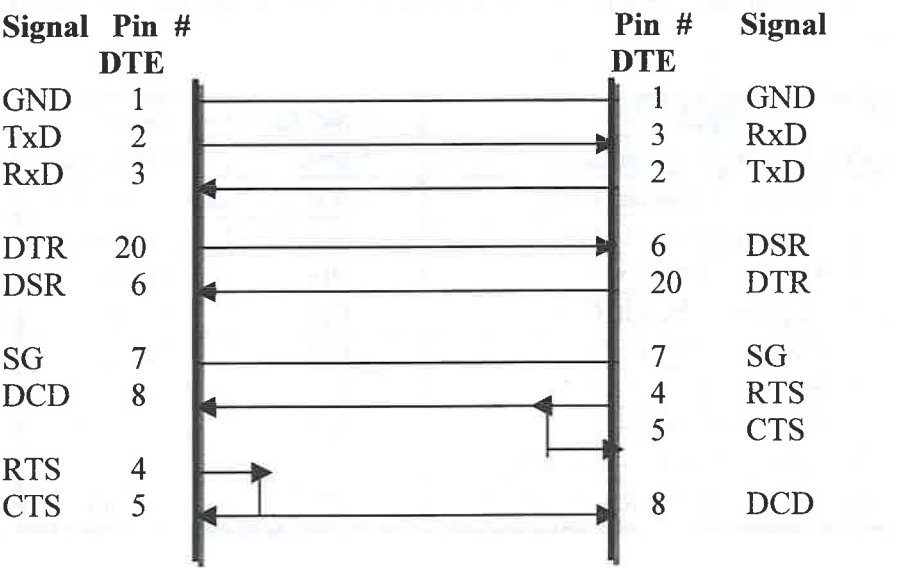

6.3 Null Modem Connections: RS232

If the software supplier or operating system does not specify a particular cable configuration, we recommend you use the following “null modem” cable when XON/XOFF is utilized.

HOST	REMOTE
2	3
3	2
4	4
5	5
6	6
7	7
8	8
20	20

If hardware handshaking is necessary, use the following cable:

HOST	REMOTE
2	3
3	2
4	4
5	5
6	20
7	7
8	8
20	6

Some serial devices have the buffer control signal on pin 19, in which case pin 6 on the host is connected to pin 19 on the remote device.

## 6.4 Modem Connections

A straight through cable is required, e.g. pin 2 to pin 2, pin 3 to pin 3, etc.

HOST	REMOTE
2	2
3	3
4	4
5	5
6	6
7	7
8	8
20	20

## 6.5 DB9 Connector

The signal assignments for a standard DB9 connector are shown below:

DB9 Pin #	Signal Name	RS-232C Name	Signal Direction
1	Data Carrier Detect(DCD)	CF	Input
2	Receive Data(RxD)	BB	Input
3	Transmit Data(TxD)	BA	Output
4	Data Terminal Ready(DTR)	CD	Output
5	Chassis Ground(GND)	AA	Common
6	Data Set Ready(DSR)	CC	Input
7	Request to Send(RTS)	CA	Output
8	Clear to Send(CTS)	CB	Input
9	Ring Indicator(RI)	CE	Input

## 6.6 RS422 Connector

The signal assignments for a standard DB25 connector are shown in the following.

Pin	Description
1	Shield Ground
2	Transmit Data(+)
3	Receive Data(+)
4	Request to Send(+)
5	Clear to Send(+)
6	Clear to send(-)
7	Ground
8	Transmit Data(-)
20	Request to Send(-)
22	Receive Data(-)


To connect the RS422 to other DATA TERMINAL EQUIPMENT (DTE) devices, the developers recommend using a DTE to DTE connection as shown below.

HOST	REMOTE
Ground	Ground
Transmit Data(+)	Receive Data(+)
Receive Data(+)	Transmit Data(+)
Transmit Data(-)	Receive Data(-)
Receive Data(-)	Transmit Data(-)
Request to Send(+)	Clear to Send(+)
Clear to Send(+)	Request to Send(+)
Request to Send(-)	Clear to Send(-)
Clear to Send(-)	Request to Send(-)

## CHAPTER 7

## INTERRUPT LATCH ADDRESS

The interrupt latch address is used to detect which of the eight channels is creating the interrupt. The interrupt latch address is set to the interrupt vector address + 2H. The relationship between each port corresponds to the interrupt indicator as shown in the following. When the corresponding bit is 0, an interrupt occurred, otherwise if the bit is 1, then no interrupt occurred.

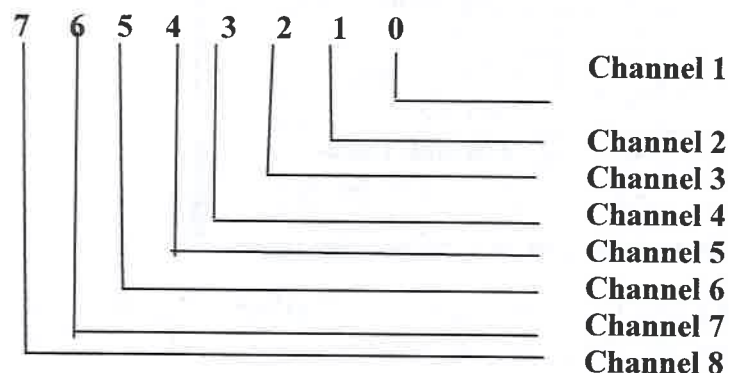

The interrupt vector must start on a multiple of 10H.

## APPENDIX A

## PC COM DIAGNOSTIC UNDER MS/DOS

The PCCOMQC program provides a diagnostic routine to test your PCCOM 8 port serial adapter under MS/DOS. It provides internal and external loopback tests. A loopback plug must be connected to each port being tested, and you can select different signal's connection to test communication signals from hardware configuration function.

■ To test your PCCOM 8 port adapter under MS/DOS, please type

A>PCCOMQC

( A> means system prompt )

\* Then select "PCCOM 8 port RS232" or "PCCOM 8 port RS422" item.

## APPENDIX B


## PC COM98 DEVICE DRIVER FOR MS/DOS

## B.1 PCCOM Software



The PCCOM V2.0 is a high performance, easy to use RS232/RS422 device driver for PC/XT, PC/AT, PC/386, PC/486, Pentium or compatibles. Under MS/DOS environment, you can set up your serial ports by PCCOM device driver, and these serial ports can be treated as COM1: and COM2: devices. The setup procedure provides flexible functions to specify the configuration of multi-serial card, that is, the hardware configurations of I/O port number, I/O port address, interrupt and interrupt vector are user selectable.

After the device driver is installed, It takes over communication between CPU and multi-serial cards such as four port card, eight port card, ... etc. For each I/O port, the service routine handles a ring buffer to keep track of all I/O data. Moreover, the PCCOM software provides library routines (C, PASCAL, BASIC, FoxPro) and DOS communication interface (DOS device driver, BIOS call) for several access levels.

The PCCOM V2.0 is an upgrade version of PCCOM V1.0 software, it combines with PCCOM V1.0 and SERIAL DRIVER utilities. Each serial port may be either 8250, 16450, 16550, or 16650 chip that was detected automatically.

 For more details, please refer PCCOMV2 manual.

## B.2 Hardware Configuration



## B.3 Software Installation

*When the board is installed, please install software drivers as follows:*

## STEP 1: Prepare PCCOM8.OPT file


*The PCCOM8.OPT file contents are :*

```
/B:2
/D:COM3
/A:[4:280,8,2C2,LO:(2k:9600:N-8-1:RTS+DTR:XON) * 8]
```

## STEP 2: Prepare CONFIG.SYS file

Insert statement into CONFIG.SYS file

```
DEVICE = PCCOM.SYS @c:\pccom8.opt
```

 If more than one PCCOM board is installed, Please refer to PCCOMV2 manual.

## APPENDIX C

## XENIX/UNIX CONFIGURATION

The distribution disk contains SCO, AT&T, UNIXWARE, and INTERACTIVE UNIX/XENIX driver, it detects non-FIFO or FIFO chips automatically. Our drivers also provide transparent printer features that let user to connect local printer from auxiliary port of terminal. The hardware configuration and software installation procedures are shown in the bellows.

## C.1 Suggested Hardware Configuration


## 1. First adapter

I/O port address: 280H

Interrupt level: IRQ4


Interrupt vector: 2C0H

SW1



280H

SW2



IRQ4

SW3



2C0H

Port	Device Name	MODEM Name	Transparent Printer Name
1	/dev/ttyj11	/dev/ttyJ11	/dev/lpj11
2	/dev/ttyj12	/dev/ttyJ12	/dev/lpj12
3	/dev/ttyj13	/dev/ttyJ13	/dev/lpj13
4	/dev/ttyj14	/dev/ttyJ14	/dev/lpj14
5	/dev/ttyj15	/dev/ttyJ15	/dev/lpj15
6	/dev/ttyj16	/dev/ttyJ16	/dev/lpj16
7	/dev/ttyj17	/dev/ttyJ17	/dev/lpj17
8	/dev/ttyj18	/dev/ttyJ18	/dev/lpj18


## 2. Second Adapter

I/O port address: 240H

Interrupt level: IRQ3

Interrupt vector: 2D0H


SW1



SW2



SW3





Port	Device Name	MODEM Name	Transparent Printer Name
1	/dev/ttyj21	/dev/ttyJ21	/dev/lpj21
2	/dev/ttyj22	/dev/ttyJ22	/dev/lpj22
3	/dev/ttyj23	/dev/ttyJ23	/dev/lpj23
4	/dev/ttyj24	/dev/ttyJ24	/dev/lpj24
5	/dev/ttyj25	/dev/ttyJ25	/dev/lpj25
6	/dev/ttyj26	/dev/ttyJ26	/dev/lpj26
7	/dev/ttyj27	/dev/ttyJ27	/dev/lpj27
8	/dev/ttyj28	/dev/ttyJ28	/dev/lpj28

## C.2 Software Installation

The installation procedure for the device drivers is described as follows:

- 1 Login as a root user.
- 2 Insert distribution diskette (which contains device drivers) into floppy disk drive A:, then copy the files from the distribution diskette to a temporary directory.

```
#cd /
# doscp a:dc.tz ./dc.tar.Z ["dosget" in Interactive UNIX]
# zcat dc.tar / tar xvpf -
```

- 3 To install device drivers, please type:

```
#cd /usr/sys/pccom/dc
# ./install
```



- 4 Reboot the system. Now, your new UNIX system that includes device drivers is activated.
- 5 Enable each terminal by using the **entty** or **enable** command. For USL UNIX (AT&T, UNIXWARE), Interactive UNIX

```
# entty ttyj11
# entty ttyj12
```

For SCO UNIX & XENIX by using **enable** command.

- 6 Connect each terminal to connector.

### NOTE:

- 1 If the new system fails to reboot, please boot the original system. When system is boot, please press return key to halt autoboot, then type

```
:unix.old
```

- 2 To remove device driver from UNIX, please type

```
a. login as a root user
b. # cd /usr/sys/pccom/dc
c. Remove PCCOM Driver from the kernel
#./ remove
```

- 3 After installation, please enable each port by **entty** (for USL, Interactive UNIX) or **enable** (for SCO UNIX and XENIX) command and disable port by **distty** (for USL, Interactive UNIX) or **disable** (for SCO UNIX and XENIX) command.

```
#distty ttyj11
```

- ④ To change baud rate, please update /etc/inittab and /etc/conf/cf.d/init.base files.

### C.3 Option for High Speed

The configuration of High-Speed Baud Rate card is change as follows:

Original	Extensible
50	14.4 K
75	28.8 K
110	57.6 K
134	76.8 K
150	115.2 K
200	153.6 K
300	230.4 K
600	460.8 K
1200	1200 (unchanged)
2400	2400 (unchanged)
4800	4800 (unchanged)
9600	9600 (unchanged)
EXTA	19200 (unchanged)
EXTB	38400 (unchanged)

### C.4 Transparent Printer

The default device names to Transparent Printer(TP) are /dev/lpXYY, that is, the prefix name is changed from "tty" to "lp" but the other "XYY" is the same. e.g. under default device names, the corresponding TTY line of /dev/lpj11 is /dev/ttyj11.

By multiplexing a serial line, there are two sorts of data channels for TTY data(by /dev/ttyXYY) and TP data(by /dev/lpXYY). If the /dev/ttyj11 is used for a TTY, it has to be enabled before you would like to print data through /dev/lpj11 to a printer that connected to the terminal that is operated via /dev/ttyj11.

The channel for TP data that is uni-directional is used to transmit the data from a host to a terminal only. The differentiates of TTY data and TP data in the same serial line is that TP data are encapsulated within a couple of PRINT-ON and PRINT-OFF escape strings that are recognized by connected terminals. The PRINT-ON and PRINT-OFF is defined by connected terminals.

The scheme to multiplex a serial line for these two channels is based on time-division method. The time slices for TTY or TP data are generated according to the entry procedure, polling, in the PCCOM driver, which is periodically called by system clock. The period of system clocks is different among various operating systems, e.g. most UNIXs is 100hz, but SCO Xenix is 50hz.

The interval reserved for TTY or TP channel in the same serial line is important to output TP data to a low-speed printer through high-throughput line from PCCOM cards if there is no flow control XON/XOFF to the serial line.



The lpx command is used to adjust the time interval for TTY or TP data and the TP protocol.

**lpx [option] device name**

• **option:**

-t number: set interval for TTY  
 -l number: set interval for Transparent Printer  
 -n string: set esc string to turn on printer  
 -f string: set esc string to turn off printer  
 -T : get interval for TTY  
 -L : get interval for Transparent Printer  
 -N : get esc\_string to turn on printer  
 -F : get esc\_string to turn off printer

• **device\_name : lpXYY**

The range of interval reserved for TTY or TP channel is from 1 to maximum integer. The default setting for any /dev/lpXYY is as follows:

Interval for TTY : 50  
 Interval for TP : 1  
 PRINT - ON escape : "\033[5i" (ESC[5i)  
 PRINT - OFF escape : "\033[4i" (ECS[4i)



☞ **The examples to invoke lpx**

- ① Set 60 time slices reserved for /dev/ttyj11

**# lpx -t 60 /dev/ttyj11**

- ② Set 2 time slices reserved for /dev/lpj11

**# lpx -l2 /dev/lpj11**

- ③ Get the time slices reserved for /dev/lpj11

**# lpx -L /dev/lpj11**

- ④ Set PRINT-ON string for /dev/lpj11

**# lpx -n "\033[5i" /dev/lpj11**

- ⑤ Get PRINT-OFF string for /dev/lpj11

**# lpx -F /dev/lpj11 \033[4i**

## APPENDIX D

### MS-WINDOWS CONFIGURATION for version 3.x

The PCCOM 8 port device driver for MS/WINDOWS works for 8250, 16450, 16550 (FIFO), 16650 etc. User can set up any address to PCCOM 8 port card, and the address must be set to consecutive.


#### D.1 Installation

1. You may set arbitrary I/O address and interrupts. However, we suggest you use the following:

I/O port address = 280H

Interrupt = IRQ5

Interrupt vector = 2C0H

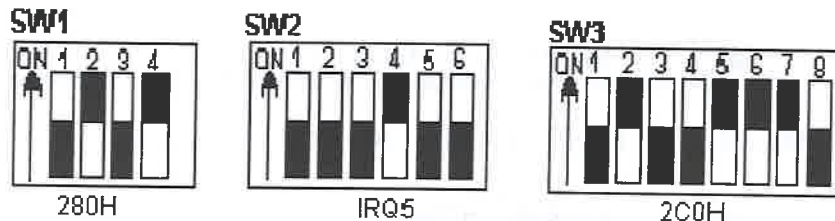

PORT	ADDRESS
1	280 - 287
2	288 - 28F
3	290 - 297
4	298 - 29F
5	2A0 - 2A7
6	2A8 - 2AF
7	2B0 - 2B7
8	2B8 - 2BF

2. Insert the distribution diskette to floppy disk drive, then run PCCOMW.EXE.
3. Select [Install].
4. Select the source path and the directory you want to install in it.
5. When copy file is finish, enter to configuration window.
6. Select your card type and the correct address/ IRQ value, then press [OK].
7. When the window presents 'complete', please restart Windows to let the driver work.

#### D.2 Uninstall

1. Enter Windows to run PCCOMW.EXE by click on PCCOM icon.
2. Select [Uninstall], and confirm that sure to uninstall.
3. When the window shows 'Uninstall complete', restart Windows to let old driver work.

#### D.3 Utilities

##### 1. Programming Manual

Since window manager can recognize only COM1 to COM9, however, to install PCCOM 8 port card, it may occupy COM3 to COM10. In the distribution diskette, we provide DLL library and include file, all functions are similar to USER.EXE functions.

**Files:** COMMX.DLL (Dynamic linked library for aux COMs)  
 COMMX.LIB (Static library for aux COMs API)  
 COMMX.H (The include file for C/C++)  
 COMMX.DOC (Document)

PCCOM library functions are similar to API Comm function

API functions are ???COMM???()  
PCCOM functions are ???COMMx???()

*For example, OpenComm() become OpenCommX() , parameters are the same.*

- Following are the functions used with communications devices.

```
int FAR PASCAL _export BuildCommXDCB(LPCSTR, DCB FAR*);
int FAR PASCAL _export OpenCommX(LPSTR, UINT,
UINT);
int FAR PASCAL _export CloseCommX(int);
int FAR PASCAL _export ReadCommX(int, LPSTR , int);
int FAR PASCAL _export WriteCommX(int,LPSTR , int);
int FAR PASCAL _export UngetCommXChar(int, char);
int FAR PASCAL _export FlushCommX(int, int);
int FAR PASCAL _export TransmitCommXChar(int, char);
int FAR PASCAL _export SetCommXState(const DCB FAR*);
int FAR PASCAL _export GetCommXState(int, DCB FAR*);
int FAR PASCAL _export GetCommXError(int, COMSTAT FAR* );
int FAR PASCAL _export SetCommXBreak(int);
int FAR PASCAL _export ClearCommXBreak(int);
UINT FAR* FAR PASCAL _export SetCommXEventMask(int,
UINT);
UINT FAR PASCAL _export GetCommXEventMask(int, int);
LONG FAR PASCAL _export EscapeCommXFunction(int, int);
```

BOOL FAR PASCAL \_export EnableCommXNotification(int, HWND, int, int);

2. Under standard WINDOW environment, to use "TERMINAL" and "CONTROL PANEL", only COM1 to COM4 can be used. If you need use COMx (more than COM4) with TERMINAL.EXE, please modify WIN.INI before enter to WINDOW. For example, to use COM6 with TERMINAL.EXE, please find

[TERMINAL]  
port=COMx

**in WIN.INI, then modify port=COMx to port=COM6.**

3. No modification are necessary for applications using up to COM9, and the printers , modems may be connected up to COM9.
4. **SPECIAL NOTE** : When you set 115200 baud( only with FIFOs ), please set 0xFF20 (or CBR\_56000+1 ) to certain functions.

#### D.4 Testing

1. Open two terminal applications under Windows.
2. Open COM port for each terminal, and have the same configuration(baud, stop bit, protocol...) e.g.  
Open COM3 to one terminal (9600 baud, 1 stop bit, 8 data bit)  
Open COM4 to another terminal (9600 baud, 1 stop bit, 8 data bit)
3. Use 'NULL MODEM' method to connect the two ports.
4. Try to transmit and receive data between the two terminal windows.

## APPENDIX E

### WINDOWS95 CONFIGURATION

The PCCOM 8 port adapter can be installed in the Windows 95 by using serial device driver in the distribution diskette, and the device driver will detect 8250, 16450, 16550, 16650 chips automatically.


#### E.1 Installation

1. You may set arbitrary I/O address and interrupts. However, we suggest you use the following:

I/O port address = 280 H

Interrupt = IRQ5

Interrupt vector = 2C0H

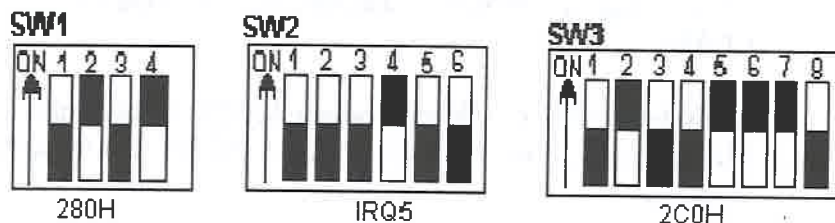

PORT	ADDRESS
1	280 – 287
2	288 – 28F
3	290 – 297
4	298 – 29F
5	2A0 – 2A7
6	2A8 – 2AF
7	2B0 – 2B7
8	2B8 – 2BF

2. Insert the distribution diskette to floppy disk drive, then run SETUP.EXE.
3. Click 'PCCOM98 Setup Panel' to run configuration setup.
4. Select your card type and the correct address/IRQ value, then press [OK].
5. When a dialog box presents 'Setup Complete', restart Windows 95 to let driver work.

- ☞ If you need install more than one card, please run 'PCCOM98 Setup Panel' again. Do not set the same address and interrupt.

#### E.2 Remove Ports

1. Enter Windows 95.
2. Enter [Control Panel]\[System]\[Device Manager]\[Ports].
3. Select the port that you want to remove, then press [Remove] to remove it.

#### E.3 Uninstall

1. Remove the file group and icons that created by InstallShield.
2. Enter [Control Panel]\[Add/Remove Program], select the 'PCCOM98 Setup Panel' and remove it.

## APPENDIX F

### O/S 2 CONFIGURATION

Under OS/2 2.x and OS/2 Warp operating system, the PCCOM device driver provides total 96 ports and baud rate up to 115200. PCCOM also supports device driver for high speed card, and the baud rate can be up to 460800. The device driver works for 8250, 16450, 16550 (FIFO), 16650 etc. User can set up any address to PCCOM 8 port card, and the address must be set to consecutive.

#### F.1 Installation

The installation procedures are shown in the following.

1. Add command into CONFIG.SYS file then reboot.

```
DEVICE=C:\PCCOM8.SYS/Axxx,www /Iyy/Czz /4
```

- xxx The first I/O port address
- www The interrupt vector address
- yy IRQ2 to IRQ7
- zz Assign the first port name (1 to 92)
- 4 High speed card used only

- ☞ if "/C" is not use, the first port is COM3.
- ☞ if option /C1 or /C2 is use, the port COM1 or COM2 is a logical port but not compatible to COM1 or COM2 on a PC machine.
- ☞ I/O Vector address value has to shift 2 from the original value (ex. 2C0H is replaced by 2C2H).

2. To set up communication parameters, please use the MODE.COM command from OS/2, or use PCCOM.EXE command. We highly recommend to use PCCOM.EXE command, because MODE.COM can be used only for COM1 to COM9 and for maximum baud rate to 57600.

*The PCCOM.EXE can be used to set COM1 to COM96. The syntax of PCCOM.EXE is the same as MODE.COM.*

- For example :

1. Set two cards from COM3 to COM10 and COM11 to COM18.

```
DEVICE=C:\PCCOM8.SYS /A240,2C2/I5 /C3
DEVICE=C:\PCCOM8.SYS /A1A0,1C2 /I7 /C11
```

2. Set up communication parameters.

```
C:\PCCOM COMx:38400,N,8,1,TO=OFF,XON=OFF,
IDSR=ON,ODSR=ON,OCTS=ON,RTS=OFF,DTR=OFF
C:\PCCOM COMx:115200,N,1
```

#### F.2 Utilities




COMTEST.EXE is a general testing program for COM port. It will create the threads associated with each communication port that will be test. The testing function includes OPEN/CLOSE/READ/WRITE/Non-Destructive Read/Non-Destructive WRITE/Get Status/Device IOCTL. Due to lack of OS/2 API, Non-Destructive I/O is not support for OS/2 even this device driver has implemented this feature.




In the COMTEST program, you can use up-right arrow to choice the option, and use enter/escape to start/stop the program.

The ComSent/ComRecv are a pair of communication programs for testing the performance of communication port. You have to connect the test ports with a null modem before you test communication port. You can use PCCOM.EXE to change the parameters of communication port. Then use this program to test heavy (transmission) duty on communication port.

### F.3 API Communication Functions

In the following, there are API communication functions, for more detail information, please refer to Control Program Programming Ref. of OS/2, and programming Guide Vol. I-III of OS/2.

-  **DosClose** - Close a Handle to a File, Pipe, or Devices  
 #define INCL\_DOSFILEMGR APIRET DosClose(HFILE  
 FileHandle);
-  **DosDevConfig** - Get Information about Attached Devices  
 #define INCL\_DOSPROCESS APIRET DosDevConfig(PVOID  
 pDeviceInfo, ULONG ulDeviceType);
-  **DosDevIOCtl** - Perform Control Function on a Device  
 Specified by an Opened Device Handle  
 #define INCL\_DOSPROCESS APIRET DosDevIOCtl(HFILE  
 DevHandle, ULONG ulCategory, ULONG ulFunction, PVOID  
 pParmList, ULONG ulParmLengthMax, PULONG  
 pParmLengthInOut, PVOID pDataArea, ULONG  
 ulDataLengthMax, PULONG pDataLengthInOut);

-  **DosOpen** - Open a File  
 #define INCL\_DOSFILEMGR APIRET DosOpen(PSZ  
 pszFileName, PHFILE ppFileHandle, PULONG pActionTaken,  
 ULONG ulFileSize, ULONG ulFileAttribute, ULONG  
 ulOpenFlag, ULONG ulOpenMode, PEAOP2 ppEABuf);
-  **DosRead** - Read from a File, Pipe, or Device to a Buffer  
 #define INCL\_DOSFILEMGR APIRET DosRead(HFILE  
 FileHandle, PVOID pBufferAre, ULONG ulBufferLength,  
 PULONG pByteRead);
-  **DosWrite** - Write to a File from a Buffer  
 #define INCL\_DOSFILEMGR APIRET DosWrite(HFILE  
 FileHandle, PVOID pBufferArea, ULONG ulBufferLength,  
 PULONG pByteWritte);

## APPENDIX G

## WINDOWS/NT CONFIGURATION

For version 3.51 up

The PCCOM 8 port adapter can be installed in the Windows NT by using serial device driver in the distribution diskette, and the device driver will detect 8250, 16450, 16550, 16650 chips automatically.


## G.1 Installation

1. You may set arbitrary I/O address and interrupts. However, we suggest you use the following:

I/O port address = 280 H

Interrupt = IRQ5

Interrupt vector = 2C0H

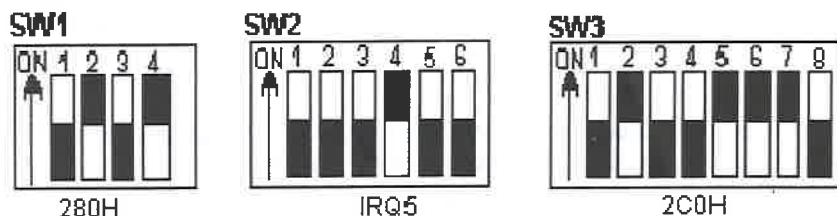

PORT	ADDRESS
1	280 - 287
2	288 - 28F
3	290 - 297
4	298 - 29F
5	2A0 - 2A7
6	2A8 - 2AF
7	2B0 - 2B7
8	2B8 - 2BF

2. Insert the distribution diskette into floppy disk drive, then run SETUP.EXE.
3. Click 'PCCOM98 Setup Panel' to run configuration setup.
4. Select your card type and the correct address/IRQ value, then press [OK].
5. When a dialog box presents 'Setup Complete', restart Windows NT to let driver work or execute the following two commands:

```
net stop serial      // stop the origin driver
net start serial     // start our new driver
```

then our driver will start to work.

6. The COM1 to COM9 can be directly referenced just like a filename from program and from the command line. However, COM10 and above must be referenced with the following syntax:

```
\\.\com10
```

Because the command line mode doesn't recognize ports above COM9.

7. Don't overlap port address and interrupt vector address, otherwise, it may conflict with UART chips.
8. If you need install more than one card, please run 'PCCOM98 Setup Panel' again. Do not set the same address and interrupt.



## G.2 Remove Ports

1. Enter Windows NT.
2. Enter [Control Panel]\[Ports].
3. Select the port to delete.

## G.3 Uninstall


1. Remove the file group and icons that created by InstallShield.
2. Enter [Control Panel]\[Add/Remove Program], select the 'PCCOM98 Setup Panel' and remove it.



## APPENDIX H

### CONCURRENT DOS CONFIGURATION MULTI - USER DOS CONFIGURATION

Set I/O port address to 280, interrupt to IRQ3 and interrupt vector to 270H. To install device drivers, please run the SETUP program, then follow the menu instructions to set up I/O port address, communication parameters (such as: baud rate, parity, data bits, ... etc.), and handshaking. The hardware configuration is shown below:

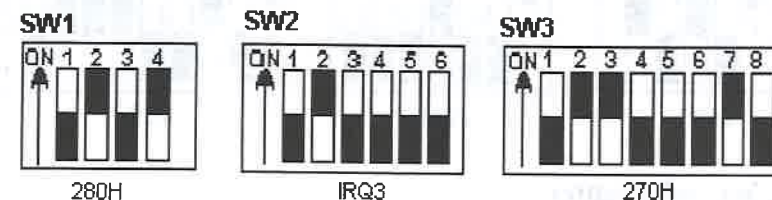


For multi-user DOS (Dr. DOS) configuration, set I/O port address to 280H, and interrupt vector to 270H. Any interrupt (IRQ3 to IRQ7) is used.

## APPENDIX I


## PICK CONFIGURATION

Refer to PICK user installation guide for more information. If selecting IRQ3 or IRQ4 be sure to disable existing COM1 or COM2 ports.


## 1. First board



280H




IRQ4




2C0H


## 2. Second adapter



180H




IRQ3




1C0H


## 3. Third adapter



100H




IRQ7




140H


## 4. Fourth adapter



200H



IRQ2



240H

## APPENDIX J

## LINUX CONFIGURATION

The PCCOM 8 port adapter can be installed in the Linux by using serial device driver supported by Linux, and the device driver will detect 8250, 16450, 16550, 16650 chips automatically. For more details, please refer to 'setserial' man-pages.

I/O port address = 2A0H

Interrupt = IRQ4

Chip type = 16550

☞ *Please add the following lines to /etc/rc.d/rc.serial or rc.local file.*

```
SETSERIAL="/bin/setserial -b"
```

```
${SETSERIAL} /dev/cua16 uart 16550 port 0x280 irq 4
```

```
${SETSERIAL} /dev/cua17 uart 16550 port 0x288 irq 4
```

```
${SETSERIAL} /dev/cua18 uart 16550 port 0x290 irq 4
```

```
${SETSERIAL} /dev/cua19 uart 16550 port 0x298 irq 4
```

```
${SETSERIAL} /dev/cua20 uart 16550 port 0x2A0 irq 4
```

```
${SETSERIAL} /dev/cua21 uart 16550 port 0x2A8 irq 4
```

```
${SETSERIAL} /dev/cua22 uart 16550 port 0x2B0 irq 4
```

```
${SETSERIAL} /dev/cua23 uart 16550 port 0x2B8 irq 4
```

## APPENDIX K

## WARRANTY INFORMATION

**K.1 Copyright**

Copyright 1997, 1998 DECISION COMPUTER INTERNATIONAL CO., LTD. All rights reserved. No part of PCCOM software and manual may be reproduced, transmitted, transcribed, or translated into any language or computer language, in any form or by any means, electronic, mechanical, magnetic, optical, chemical, manual, or otherwise, without the prior written permission of DECISION COMPUTER INTERNATIONAL CO., LTD.

Each piece of PCCOM package permits user to use PCCOM only on a single computer, a registered user may use the program on a different computer, but may not use the program on more than one computer at the same time.

Corporate licensing agreements allow duplication and distribution of specific number of copies within the licensed institution. Duplication of multiple copies is not allowed except through execution of a licensing agreement. Welcome call for details.

**K.2 Warranty Information**

DECISION warrants that for a period of one year from the date of purchase (unless otherwise specified in the warranty card) that the goods supplied will perform according to the specifications defined in the user manual. Furthermore that the PCCOM product will be supplied free from defects in materials and workmanship and be fully functional under normal usage.



In the event of the failure of a PCCOM product within the specified warranty period, DECISION will, at its option, replace or repair the item at no additional charge. This limited warranty does not cover damage resulting from incorrect use, electrical interference, accident, or modification of the product.

All goods returned for warranty repair must have the serial number intact. Goods without serial numbers attached will not be covered by the warranty.

Transportation costs for goods returned must be paid by the purchaser. Repaired goods will be dispatched at the expense of PCCOM.

To ensure that your PCCOM product is covered by the warranty provisions, it is necessary that you return the Warranty card.

Under this Limited Warranty, DECISION's obligations will be limited to repair or replacement only, of goods found to be defective as specified above during the warranty period. DECISION is not liable to the purchaser for any damages or losses of any kind, through the use of, or inability to use, the PCCOM product.

DECISION reserves the right to determine what constitutes warranty repair or replacement.

**Return Authorization:** It is necessary that any returned goods are clearly marked with an RA number that has been issued by DECISION. Goods returned without this authorization will not be attended to.

NOTE:

NOTE:



## WE MANUFACTURE....

Data Acquisition and Measurement Products  
Industrial Automation & Control Products  
Multiport RS232/422/485 Serial Cards




Via Internet & World Wide Web (WWW)  
Remote Control & Communication Function

15 Years of Professional Experience for PC-Base Data  
Acquisition and Serial Communication Products.

# Worldwide's No.1 in Remote Control Technology!

## WE MANUFACTURE....


Data Acquisition and Measurement Products  
Industrial Automation & Control Products  
Multiport RS232/422/485 Serial Cards

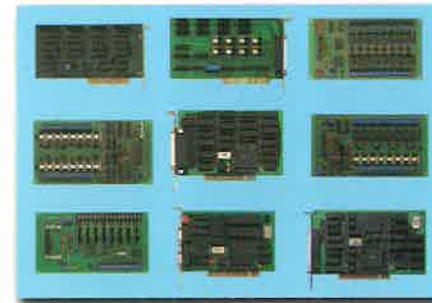

## We Provide Software Development Tool Kits



For Internet, Intranet & World Wide Web (WWW)  
Remote Control & Communication Function

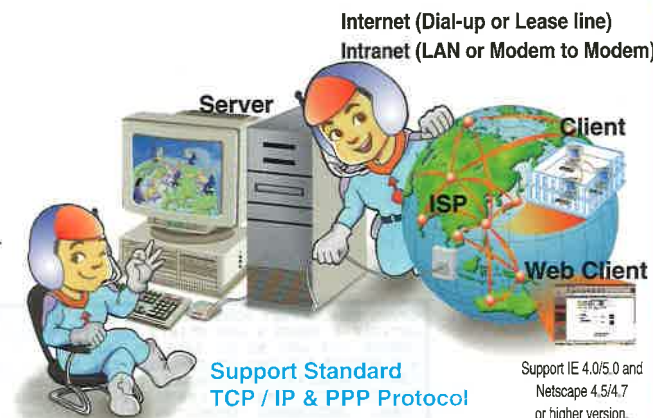

## 8 Major Functions

1. Remote Sound
2. Chat
3. Remote CCD Camera
4. Internet Location Server
5. Remote Digital I/O
6. Remote AD/DA
7. Remote Serial Communication
8. Remote Telecommunication function

LIKELY TO CAUSE HARMFUL INTERFERENCE IN WHICH  
CASE THE USER WILL BE REQUIRED TO CORRECT THE  
INTERFERENCE AT HIS OWN EXPENSE.