

# IE300 Series

## Industrial Ethernet, Layer 3 Switches

Our ruggedized IE300 Industrial Ethernet switches are built for enduring performance in harsh environments, such as those found in manufacturing, transportation and physical security. Offering high throughput, rich functionality and advanced security features, IE300 switches deliver the performance and reliability demanded by industrial deployments in the Internet of Things (IoT) age.



### Overview

The IE300 Series are wirespeed Layer 3 switches for industrial Ethernet applications. With a wide operating temperature range of between -40°C and 75°C, they tolerate harsh and demanding environments, such as those found in industrial and outdoor deployment.

Device management is provided via Industry-standard CLI, SNMP, Telnet, SSH, or Allied Telesis Management Framework™ (AMF). AMF is unique to Allied Telesis managed devices, offering simplified device provisioning, recovery and firmware upgrade management.

### Performance

The IE300 Series of high performance and cost-effective managed switches meets the high reliability requirements of industrial network operations. These robust switches provide network managers with several key features, using the simple web-based management function, including port-based VLANs, IEEE 802.1p, QoS, port trunking/link aggregation, port mirroring, priority queues, and IEEE 802.1x security support. With support for up to 16K MAC addresses, the IE300 Series is the ideal option for integrating management into any network solution.

### Securing the Network Edge

To ensure data protection, it is important to control network access. Protocols such as IEEE 802.1X port-based authentication guarantee that only known users are connected to the network. Unknown users who physically connect can be segregated into a pre-determined part of the network, offering network guests such benefits as Internet access, while ensuring the integrity of private network data.

### Gigabit and Fast Ethernet Support

The IE300 Series SFP ports support both Gigabit and Fast Ethernet Small Form-Factor Pluggables (SFPs). This makes IE300 Series switches ideal for environments where Gigabit fiber switches will be phased in over time. This allows for connectivity to the legacy 100FX hardware until it is upgraded to Gigabit Ethernet.

Support for both speeds of SFPs allows organizations to stay within budget as they migrate to faster technologies.

### High Network Resiliency

The IE300 Series supports highly stable and reliable network switching with a recovery time of less than 50ms. You can customize the IE300 with the most appropriate mechanism and protocol to prevent network connection failure. Choices include Allied Telesis Ethernet Protection Switched Ring (EPSRing™), and the standard ITU-T G.8032.

### Configurable Power Budget

On the AT-IE300-12GP, you can configure the overall power budget as well as the power feeding limit on a per-port basis, to establish a close relationship between the power sourcing feature with the real capabilities of the external Power Supply Unit (PSU).\*

\* Power supply must be compliant with local/national safety and electrical code requirements. Select the supply with the most appropriated output power derating curve.

## Key Features

- ▶ AlliedWare Plus™ functionalities
- ▶ Allied Telesis Management Framework™ (AMF) node
- ▶ Routing capability (ECMP, OSPF, RIP, Static)
- ▶ Industry-leading QoS
- ▶ Active Fiber Monitoring™
- ▶ sFlow
- ▶ Ethernet Protection Switched Ring (EPSRing™)
- ▶ Ethernet Ring Protection Switching (ITU-T G.8032)
- ▶ IEEE 802.3at PoE+ sourcing (30W)
- ▶ Hi-PoE sourcing (60W)
- ▶ High Availability Network Power (HANP)
- ▶ Enhanced Thermal Shutdown
- ▶ Redundant power inputs
- ▶ Alarm Input/Output
- ▶ USB port for image/configuration backup, restore, and upgrade



## Key Details

### Allied Telesis Management Framework (AMF)

- ▶ Allied Telesis Management Framework (AMF) is a sophisticated suite of management tools that provide a simplified approach to network management. Common tasks are automated or made so simple that the every-day running of a network can be achieved without the need for highly-trained, and expensive, network engineers.
- ▶ Powerful features like centralized management, auto-backup, auto-upgrade, auto-provisioning and auto-recovery enable plug-and-play networking and zero-touch management.

### High Availability

- ▶ EPSRing™ and ITU-T G.8032 allow to form a protected ring capable of recovery within as little as 50ms; These features are perfect for high performance and high availability.
- ▶ Spanning-Tree protocol compatible; RSTP; MSTP; static Link Aggregation Group (LAG) and dynamic Link Aggregation Control Protocol (LACP) support

### Industry-leading Quality of Service (QoS)

- ▶ Comprehensive low-latency wire-speed QoS provides flow-based traffic management with full classification, prioritization, traffic shaping and min/max bandwidth profiles. Enjoy boosted network performance and guaranteed delivery of business-critical Ethernet services and applications. Time-critical services such as voice and video take precedence over non-essential services such as file downloads, maintaining responsiveness of your applications.

### sFlow

- ▶ sFlow is an industry standard technology for monitoring high speed switched networks. It provides complete visibility into network use, enabling performance optimization, usage accounting/billing, and defense against security threats. Sampled packets sent to a collector ensure it always has a real-time view of network traffic.

### Active Fiber Monitoring

- ▶ Active Fiber Monitoring prevents eavesdropping on fiber communications by monitoring received optical power. If an intrusion is detected, the link can be automatically shut down, or an operator alert can be sent.

### UniDirectional Link Detection

- ▶ UniDirectional Link Detection (UDLD) is useful for monitoring fiber-optic links between two switches that use two single-direction fibers to transmit and receive packets. UDLD prevents traffic from being sent across a bad link by blocking the ports at both ends of the link in the event that either the individual transmitter or receiver for that connection fails.

### Link Layer Discovery Protocol – Media Endpoint Discovery (LLDP – MED)

- ▶ LLDP-MED extends LLDP basic network endpoint discovery and management functions. LLDP-MED allows for media endpoint specific messages, providing detailed information on power equipments, network policy, location discovery (for Emergency Call Services) and inventory.

### VLAN Translation

- ▶ VLAN Translation allows traffic arriving on a VLAN to be mapped to a different VLAN on the outgoing paired interface.
- ▶ In Metro networks, it is common for the Network Service Provider to give each customer their own unique VLAN, yet at the customer location, give all the customers the same VLAN-ID for tagged packets to use on the wire. VLAN-ID translation can be used by the Service Provider to change the tagged packet's VLAN-ID at the customer location to the VLAN-ID for tagged packets to use within the NSP's network.
- ▶ This feature is also useful in Enterprise environments where it can be used to merge two networks together without manually reconfiguring the VLAN numbering scheme. This situation can occur if two companies have merged and the same VLAN-ID is used for two different purposes.

### Voice VLAN

- ▶ Voice VLAN automatically separates voice and data traffic into two different VLANs. This automatic separation places delay-sensitive traffic into a voice- dedicated VLAN, which simplifies QoS configurations.

### VLAN Mirroring (RSPAN)

- ▶ VLAN mirroring allows traffic from a port on a remote switch to be analyzed locally. Traffic being transmitted or received on the port is duplicated and sent across the network on a special VLAN.

### Security (Tri-authentication)

- ▶ Authentication options on the IE300 Series also include alternatives to IEEE 802.1X port-based authentication, such as web authentication, to enable guest access and MAC authentication for endpoints that do not have an IEEE 802.1X supplicant. All three authentication methods—IEEE 802.1X, MAC-based and Web-based—can be enabled simultaneously on the same port for tri-authentication.

### Access Control Lists (ACLs)

- ▶ AlliedWare Plus delivers industry-standard Access Control functionality through ACLs. ACLs filter network traffic to control whether routed packets are forwarded or blocked at the port interface. This provides a powerful network security mechanism to select the types of traffic to be analyzed, forwarded, or influenced in some way.

### Dynamic Host Configuration Protocol (DHCP) Snooping

- ▶ DHCP servers allocate IP addresses to clients, and the switch keeps a record of addresses issued on each port. IP source guard checks against this DHCP snooping database to ensure only clients with specific IP and/or MAC address can access the network. DHCP snooping can be combined with other features, like dynamic ARP inspection, to increase security in layer 2 switched environments, and also provides a traceable history, which meets the growing legal requirements placed on service providers.

### PoE, PoE+ and Hi-PoE

- ▶ IE300 is a Power over Ethernet PoE Power Sourcing Device (PoE PSD) which is compliant with IEEE802.3af, IEEE802.3at standards. Each port provides either 15.40W PoE with 12.95W available to the powered device (IEEE802.3af, IEEE802.3at Type 1), or 30.00W PoE+ with 25.50W available to the powered device (IEEE802.3at Type 2). Four ports are configurable for Hi-PoE (also known as Ultra PoE, High PoE, PoE++, and others because there is no current standard), which uses all four pairs in the cable to provide up to 60W—double the capacity of PoE+. Practical use is to support PTZ cameras with heater/blowers for outdoor application, enhanced infrared lighting, lighting controller and LED lighting fixtures, Remote Point of Sale (POS) kiosks, network switches, as well as other devices.
- ▶ IE300 allows the configuration of the overall power budget as well as the power feeding limit on port basis; that establishes a close relationship between power sourcing feature with the real capabilities of the external PSU.

### High Availability Network Power (HANP)

- ▶ Enabling the unique High Availability Network Power (HANP) feature, the switch retains PoE sourcing during restart events, such as those due to operator command, software exception, watchdog timeout or diagnostic failures.
- ▶ The restart event is not propagated to the end devices, and camera operation is not affected.

### Alarm Input/Output

- ▶ Alarm Input/Output are useful for security integration solution; they respond to events instantly and automatically by a pre-defined event scheme, and notify alert message to the monitoring control center. The 2-pin terminal blocks may be connected to sensors and actuator relays. Alarm Input receives signal from external devices like motion sensor and magnets; that will trigger subsequent actions if something changes. Alarm output controls external device upon a event (i.e. sirens, strobes, PTZ camera).


### Enhanced Thermal Shutdown

- ▶ The enhanced Thermal Shutdown feature acts when the switch exceeds the safe operating temperature; different stages allow to preserve services and prevent damage. When the operating temp reaches critical levels, the system cuts the PoE sourcing to non-critical interfaces first, then to critical interfaces; if the temp still increases, then all services will be disabled and the system will enter the standby mode. The system restores operation when the temperature returns at acceptable levels.

### Premium Software License

- ▶ By default, the IE300 Series offers a comprehensive Layer 2 and basic Layer 3 feature set that includes static routing and IPv6 management features. The feature set can easily be upgraded with premium software licenses.

## Key Solutions

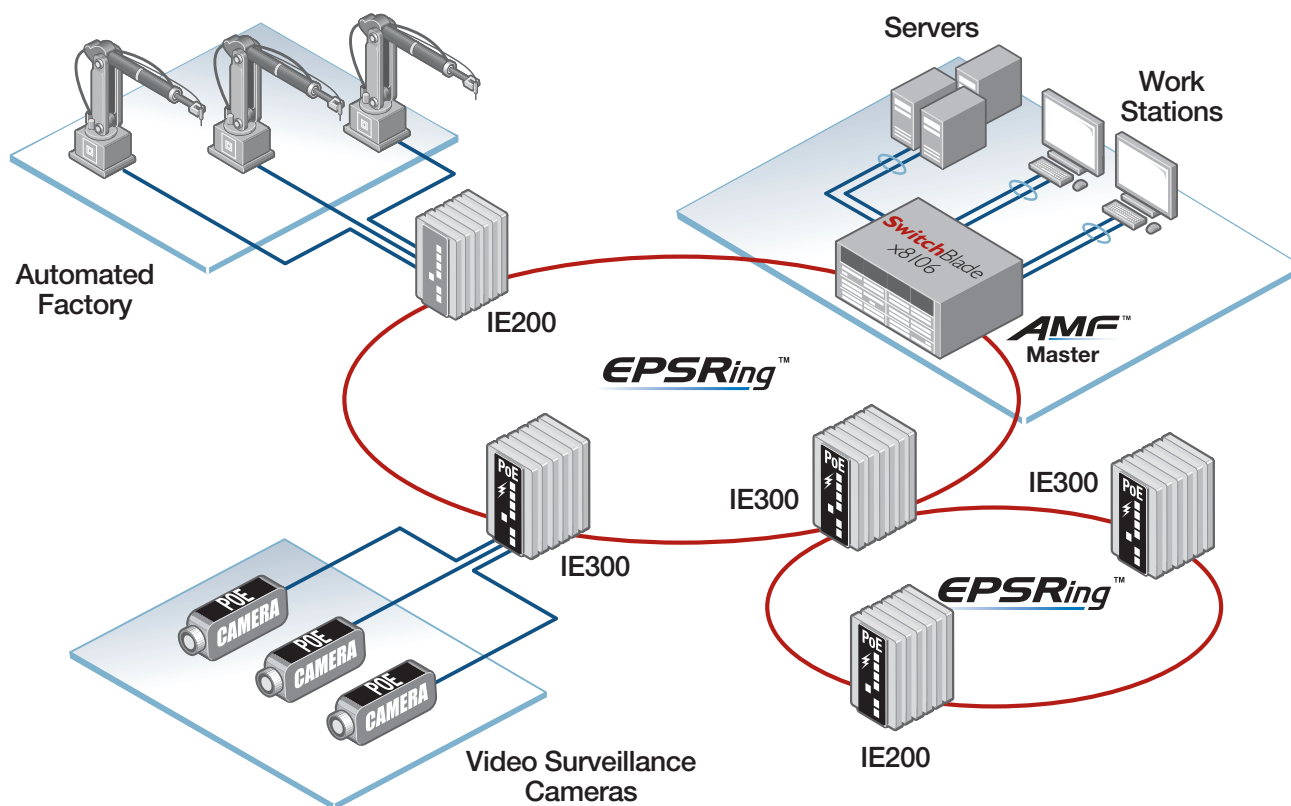

Ethernet Protection Switched Ring (EPSRing™) and ITU-T G.8032 provide high speed resilient ring connectivity; this diagram shows the IE Series in a double ring network topology.

The IE Series operates at a large -40°C to +75°C temperature range and allows deployment in outdoor and harsh industrial environments.

PoE models feed 30 Watts per port and support remotely controlled pan, tilt and zoom (PTZ) video cameras.

The IE300 can source up to 60 Watts on four ports. The Hi-PoE utilizes all four pairs in the cable to provide power and expands the range of devices that can be added to the network, such as PTZ cameras with a heater/blower, enhanced infrared lighting, POS terminals, and thin client computer.

Management can be automated with the Allied Telesis Management Framework™ (AMF).

## Specifications

PRODUCT	10/100/1000T (RJ-45) COPPER PORTS	100/1000X SFP PORTS	SWITCHING FABRIC	FORWARDING RATE (64-BYTE PACKETS)	POE SOURCING PORTS	POE BUDGET
AT-IE300-12GP-80	8	4	24Gbps	17.8Mpps	8	240W
AT-IE300-12GT-80	8	4	24Gbps	17.8Mpps	-	-

### Performance

MAC address	16K entries
Packet Buffer	1.5 MBytes (12.2 Mbits)
Priority Queues	8
Simultaneous VLANs	4K
VLANs ID range	1 – 4094
Jumbo frames	9KB jumbo packets
Multicast groups	1K (layer 2), 256 (layer 3)

### Other Interfaces

Type	Serial console (UART)
Port no.	1
Connector	RJ-45 female
Type	USB2.0 (Host Controller Class)
Port no.	1
Connector	Type A receptacle
Type	Alarm Input
Port no.	1
Connector	2-pin Terminal Block
Type	Alarm Output
Port no.	1
Connector	2-pin Terminal Block
Type	Power Input
Port no.	2
Connector	2-pin Terminal Block

### Reliability

- ▶ Modular AlliedWare™ operating system
- ▶ Redundant power input
- ▶ Full environmental monitoring of temperature and internal voltages. SNMP traps alert network managers in case of any failure
- ▶ Enhanced Thermal Shutdown

### Flexibility and Compatibility

- ▶ Gigabit SFP ports supports any combination of Allied Telesis 10Mbps, 100Mbps and 1Gbps SFP modules listed in this document under Ordering Information

### Diagnostic Tools

- ▶ Active Fiber Monitoring detects tampering on optical links
- ▶ Automatic link flap detection and port shutdown
- ▶ Built-In Self Test (BIST)
- ▶ Cable fault locator (TDR)
- ▶ Event logging via Syslog over IPv4
- ▶ Find-me device locator
- ▶ Optical Digital Diagnostic Monitoring (DDM)
- ▶ Ping polling and TraceRoute for IPv4 and IPv6
- ▶ Port and VLAN mirroring (RSPAN)
- ▶ UniDirectional Link Detection (UDLD)

### IPv4 Features

- ▶ Black hole routing
- ▶ Directed broadcast forwarding
- ▶ DHCP server and relay

- ▶ DNS relay
- ▶ Equal Cost Multi Path (ECMP) routing
- ▶ Route redistribution (OSPF, RIP)
- ▶ Static unicast and multicast routes for IPv4
- ▶ UDP broadcast helper (IP helper)

### IPv6 Features

- ▶ DHCPv6 relay, DHCPv6 client
- ▶ IPv4 and IPv6 dual stack
- ▶ IPv6 hardware ACLs
- ▶ Device management over IPv6 networks with SNMPv6, Telnetv6 and SSHv6
- ▶ NTPv6 client and server

### Management

- ▶ Front panel 3 LED provides at-a-glance PSU status and fault information
- ▶ Front panel 8 LED provides at-a-glance PoE status and indication of power budget consumption (PoE PSE device only)
- ▶ Allied Telesis Management Framework (AMF) node
- ▶ Console management port on the front panel for ease of access
- ▶ Eco-friendly mode allows ports and LEDs to be disabled to save power
- ▶ Industry-standard CLI with context-sensitive help
- ▶ Powerful CLI scripting engine
- ▶ Built-in text editor
- ▶ Event-based triggers allow user-defined scripts to be executed upon selected system events
- ▶ SNMPv1/v2c/v3 support
- ▶ Comprehensive SNMP MIB support for standards based device management
- ▶ USB interface allows software release files, configurations and other files to be stored for backup and distribution to other devices
- ▶ Recessed Reset button

### Quality of Service

- ▶ 8 priority queues with a hierarchy of high priority queues for real-time traffic, and mixed scheduling, for each switch port
- ▶ Limit bandwidth per port or per traffic class down to 64kbps
- ▶ Wirespeed traffic classification with low latency essential for VoIP and real-time streaming media applications
- ▶ Policy-based QoS based on VLAN, port, MAC and general packet classifiers
- ▶ Policy-based storm protection
- ▶ Extensive remarking capabilities
- ▶ Taildrop for queue congestion control
- ▶ Strict priority, weighted round robin or mixed scheduling
- ▶ IP precedence and DiffServ marking based on layer 2, 3 and 4 headers

### Resiliency Features

- ▶ Control Plane Prioritization (CPP) ensures the CPU always has sufficient bandwidth to process network control traffic
- ▶ Ethernet Protection Switched Rings (EPSRing™) with SuperLoop Protection (SLP)
- ▶ Ethernet Ring Protection Switching (ITU-T G.8032)
- ▶ Loop protection: loop detection and thrash limiting
- ▶ Link Aggregation Control Protocol (LACP)
- ▶ Multiple Spanning Tree Protocol (MSTP)
- ▶ PVST+ compatibility mode
- ▶ Rapid Spanning Tree Protocol (RSTP)
- ▶ Spanning Tree Protocol (STP) with root guard
- ▶ Virtual Router Redundancy Protocol (VRRPv3)

### Multicasting

- ▶ Internet Group Membership Protocol (IGMPv1/v2/v3)
- ▶ IGMP proxy
- ▶ IGMP snooping with fast leave and no timeout feature
- ▶ IGMP static groups
- ▶ Multicast Listener Discovery (MLDv1/v2)
- ▶ MLD snooping
- ▶ Protocol Independent Multicast (PIM)
- ▶ PIM Dense Mode (DM) for IPv4 and IPv6
- ▶ PIM Sparse Mode (SM) for IPv4 and IPv6
- ▶ PIM Dense Mode to Sparse Mode translation

### Security Features

- ▶ Access Control Lists (ACLs) based on layer 3 and 4 headers
- ▶ Configurable ACLs for management traffic
- ▶ Authentication, Authorization and Accounting (AAA)
- ▶ Bootloader can be password protected for device security
- ▶ BPDU protection
- ▶ DHCP snooping, IP source guard and Dynamic ARP Inspection (DAI)
- ▶ DoS attack blocking and virus throttling
- ▶ Dynamic VLAN assignment
- ▶ MAC address filtering and MAC address lockdown
- ▶ Network Access and Control (NAC) features manage endpoint security
- ▶ Port-based learn limits (intrusion detection) Private VLANs provide security and port isolation for multiple customers using the same VLAN
- ▶ RADIUS local server (100 users) and accounting
- ▶ Secure Copy (SCP)
- ▶ Strong password security and encryption
- ▶ TACACS+ authentication and accounting
- ▶ Tri-authentication: MAC-based, web-based and IEEE 802.1X
- ▶ Auth-fail and guest VLANs



Environmental Specifications

Operating temp.	-40°C to 75°C (-40°F to 167°F)
Storage temp.	-40°C to 85°C (-40°F to 185°F)
Operating humidity	5% to 95% non-condensing
Storage humidity	5% to 95% non-condensing
Operating altitude	up to 3,000 m (9,843 ft)

Mechanical

EN 50022, EN 60715 Standardized mounting on rails

Environmental Compliance

RoHS  
China RoHS  
WEEE

Electrical/Mechanical Approvals

Compliance Mark	CE, FCC
Safety	EN/IEC/UL 60950-1 EN/IEC/UL 60950-22 CAN/CSA-22.2 no. 60950-1 CAN/CSA-22.2 no. 60950-22

EMC

CISPR 32  
EN55024  
EN55032 Class A  
EN61000-3-2  
EN61000-3-3  
EN61000-4-2 (ESD)

Shock

EN61000-4-3 (RS)  
EN61000-4-4 (EFT)  
EN61000-4-5 (Surge)  
EN61000-4-6 (CS)  
EN61000-4-8  
EN61000-4-11  
FCC Part 15B, Class A

Vibration

EN60068-2-6

Traffic Control

NEMA TS2

Physical Specifications

PRODUCT	WIDTH	DEPTH	HEIGHT	WEIGHT	ENCLOSURE	MOUNTING	PROTECTION RATE
AT-IE300-12GP-80	146 mm (5.75 in)	127 mm (5.00 in)	152 mm (6.00 in)	2.0 kg (.4.5 lb)	Aluminum shell	DIN rail, wall mount	IP30, IP31*
AT-IE300-12GT-80	146 mm (5.75 in)	127 mm (5.00 in)	152 mm (6.00 in)	2.0 kg (.4.4 lb)	Aluminum shell	DIN rail, wall mount	IP30, IP31*

\* with additional cover tool

Power Characteristics

PRODUCT	INPUT VOLTAGE	COOLING	NO POE LOAD			FULL POE LOAD			MAX POE POWER	MAX POE SOURCING PORTS		
			MAX POWER CONSUMPTION	MAX HEAT DISSIPATION	NOISE	MAX POWER CONSUMPTION	MAX HEAT DISSIPATION	NOISE		POE (15W)	POE+ (30W)	HI-POE (60W)
AT-IE300-12GP-80	48V DC *, 55V DC **	fanless	43W		-	320W ***	147 BTU/hr	-	240W	8	8	4
AT-IE300-12GT-80	12-55V DC	fanless	30W	102 BTU/hr	-	-	-	-	-	-	-	-

\* sourcing IEEE 802.3at Type 1 (PoE)

\*\* sourcing IEEE 802.3at Type 2 (PoE+, Hi-PoE)

\*\*\* include PD's consumption and margin

Standards and Protocols

AlliedWare Plus Operating System

Version 5.4.7\*

\*Available in Q1 2017

Authentication

RFC 1321	MD5 Message-Digest algorithm
RFC 1828	IP authentication using keyed MD5

Encryption

FIPS 180-1	Secure Hash standard (SHA-1)
FIPS 186	Digital signature standard (RSA)
FIPS 46-3	Data Encryption Standard (DES and 3DES)

Ethernet Standards

IEEE 802.1AX	Link aggregation (static and LACP)
IEEE 802.2	Logical Link Control (LLC)
IEEE 802.3	Ethernet
IEEE 802.3ad	Static and dynamic link aggregation
IEEE 802.3af	Power over Ethernet (PoE)
IEEE 802.3at	Power over Ethernet plus (PoE+)
IEEE 802.3az	Energy Efficient Ethernet (EEE)
IEEE 802.3u	100BASE-X
IEEE 802.3x	Flow control - full-duplex operation
IEEE 802.3z	1000BASE-X

IPv4 Standards

RFC 791	Internet Protocol (IP)
RFC 792	Internet Control Message Protocol (ICMP)
RFC 826	Address Resolution Protocol (ARP)

RFC 894	Standard for the transmission of IP datagrams over Ethernet networks
RFC 919	Broadcasting Internet datagrams
RFC 922	Broadcasting Internet datagrams in the presence of subnets
RFC 932	Subnetwork addressing scheme
RFC 950	Internet standard subnetting procedure
RFC 951	Bootstrap Protocol (BootP)
RFC 1027	Proxy ARP
RFC 1042	Standard for the transmission of IP datagrams over IEEE 802 networks
RFC 1071	Computing the Internet checksum
RFC 1122	Internet host requirements
RFC 1191	Path MTU discovery
RFC 1256	ICMP router discovery messages
RFC 1518	An architecture for IP address allocation with CIDR
RFC 1519	Classless Inter-Domain Routing (CIDR)
RFC 1542	Clarifications and extensions for BootP
RFC 1812	Requirements for IPv4 routers
RFC 1918	IP addressing

IPv6 Standards

RFC 1981	Path MTU discovery for IPv6
RFC 2460	IPv6 specification
RFC 2464	Transmission of IPv6 packets over Ethernet networks
RFC 3484	Default address selection for IPv6
RFC 3596	DNS extensions to support IPv6
RFC 4007	IPv6 scoped address architecture
RFC 4193	Unique local IPv6 unicast addresses
RFC 4291	IPv6 addressing architecture
RFC 4443	Internet Control Message Protocol (ICMPv6)
RFC 4861	Neighbor discovery for IPv6

RFC 4862	IPv6 Stateless Address Auto-Configuration (SLAAC)
RFC 5014	IPv6 socket API for source address selection
RFC 5095	Deprecation of type 0 routing headers in IPv6
RFC 5175	IPv6 Router Advertisement (RA) flags option
RFC 6105	IPv6 Router Advertisement (RA) guard

Management

AMF MIB and SNMP traps	
AT Enterprise MIB	
Optical DDM MIB	
SNMPv1, v2c and v3	
IEEE 802.1ABLink Layer Discovery Protocol (LLDP)	
RFC 1155	Structure and identification of management information for TCP/IP-based Internets
RFC 1157	Simple Network Management Protocol (SNMP)
RFC 1212	Concise MIB definitions
RFC 1213	MIB for network management of TCP/IP-based Internets: MIB-II
RFC 1215	Convention for defining traps for use with the SNMP
RFC 1227	SNMP MUX protocol and MIB
RFC 1239	Standard MIB
RFC 1724	RIPv2 MIB extension
RFC 2011	SNMPv2 MIB for IP using SMIv2
RFC 2012	SNMPv2 MIB for TCP using SMIv2
RFC 2013	SNMPv2 MIB for UDP using SMIv2
RFC 2096	IP forwarding table MIB
RFC 2578	Structure of Management Information v2 (SMIv2)
RFC 2579	Textual conventions for SMIv2
RFC 2580	Conformance statements for SMIv2

RFC 2674	Definitions of managed objects for bridges with traffic classes, multicast filtering and VLAN extensions
RFC 2741	Agent extensibility (AgentX) protocol
RFC 2787	Definitions of managed objects for VRRP
RFC 2819	RMON MIB (groups 1,2,3 and 9)
RFC 2863	Interfaces group MIB
RFC 3164	Syslog protocol
RFC 3176	sFlow: a method for monitoring traffic in switched and routed networks
RFC 3411	An architecture for describing SNMP management frameworks
RFC 3412	Message processing and dispatching for the SNMP
RFC 3413	SNMP applications
RFC 3414	User-based Security Model (USM) for SNMPv3
RFC 3415	View-based Access Control Model (VACM) for SNMP
RFC 3416	Version 2 of the protocol operations for the SNMP
RFC 3417	Transport mappings for the SNMP
RFC 3418	MIB for SNMP
RFC 3621	Power over Ethernet (PoE) MIB
RFC 3635	Definitions of managed objects for the Ethernet-like interface types
RFC 3636	IEEE 802.3 MAU MIB
RFC 4188	Definitions of managed objects for bridges
RFC 4318	Definitions of managed objects for bridges with RSTP
RFC 4560	Definitions of managed objects for remote ping, traceroute and lookup operations
RFC 6527	Definitions of managed objects for VRRPv3

### Multicast Support

	Bootstrap Router (BSR) mechanism for PIM-SM
	IGMP query solicitation
	IGMP snooping (IGMPv1, v2 and v3)
	IGMP snooping fast-leave
	IGMP/MLD multicast forwarding (IGMP/MLD proxy)
	MLD snooping (MLDv1 and v2)
	PIM-SM and SSM for IPv6
RFC 1112	Host extensions for IP multicasting (IGMPv1)
RFC 2236	Internet Group Management Protocol v2 (IGMPv2)
RFC 2710	Multicast Listener Discovery (MLD) for IPv6
RFC 2715	Interoperability rules for multicast routing protocols
RFC 3306	Unicast-prefix-based IPv6 multicast addresses
RFC 3376	IGMPv3
RFC 3810	Multicast Listener Discovery v2 (MLDv2) for IPv6
RFC 3956	Embedding the Rendezvous Point (RP) address in an IPv6 multicast address
RFC 3973	PIM Dense Mode (DM)

RFC 4541	IGMP and MLD snooping switches
RFC 4601	Protocol Independent Multicast - Sparse Mode (PIM-SM): protocol specification (revised)
RFC 4604	Using IGMPv3 and MLDv2 for source-specific multicast
RFC 4607	Source-specific multicast for IP

### Open Shortest Path First (OSPF)

	OSPF link-local signaling
	OSPF MD5 authentication
	Out-of-band LSDB resync
RFC 1245	OSPF protocol analysis
RFC 1246	Experience with the OSPF protocol
RFC 1370	Applicability statement for OSPF
RFC 1765	OSPF database overflow
RFC 2328	OSPFv2
RFC 2370	OSPF opaque LSA option
RFC 2740	OSPFv3 for IPv6
RFC 3101	OSPF Not-So-Stubby Area (NSSA) option
RFC 3509	Alternative implementations of OSPF area border routers
RFC 3623	Graceful OSPF restart
RFC 3630	Traffic engineering extensions to OSPF
RFC 4552	Authentication/confidentiality for OSPFv3
RFC 5329	Traffic engineering extensions to OSPFv3

### Quality of Service (QoS)

IEEE 802.1p	Priority tagging
RFC 2211	Specification of the controlled-load network element service
RFC 2474	DiffServ precedence for eight queues/port
RFC 2475	DiffServ architecture
RFC 2597	DiffServ Assured Forwarding (AF)
RFC 2697	A single-rate three-color marker
RFC 2698	A two-rate three-color marker
RFC 3246	DiffServ Expedited Forwarding (EF)

### Resiliency

IEEE 802.1ag	CCP Connectivity Fault Management - Continuity Check Protocol (CCP)
IEEE 802.1d	MAC bridges
IEEE 802.1s	Multiple Spanning Tree Protocol (MSTP)
IEEE 802.1w	Rapid Spanning Tree Protocol (RSTP)
ITU-T G.8032	Ethernet ring protection switching
RFC 5798	Virtual Router Redundancy Protocol version 3 (VRRPv3) for IPv4 and IPv6

### Routing Information Protocol (RIP)

RFC 1058	Routing Information Protocol (RIP)
RFC 2080	RIPng for IPv6
RFC 2081	RIPng protocol applicability statement
RFC 2082	RIP-2 MD5 authentication
RFC 2453	RIPv2

### Security

	SSH remote login
	SSLv2 and SSLv3
	TACACS+ accounting and authentication
	IEEE 802.1X authentication protocols (TLS, TTLS, PEAP, MD5)
	IEEE 802.1X multi-suppliant authentication
	IEEE 802.1X port-based network access control
RFC 2818	HTTP over TLS ("HTTPS")
RFC 2865	RADIUS
RFC 2866	RADIUS accounting
RFC 2868	RADIUS attributes for tunnel protocol support
RFC 3280	Internet X.509 PKI Certificate and Certificate Revocation List (CRL) profile
RFC 3546	Transport Layer Security (TLS) extensions
RFC 3579	RADIUS support for Extensible Authentication Protocol (EAP)
RFC 3580	IEEE 802.1x RADIUS usage guidelines
RFC 3748	PPP Extensible Authentication Protocol (EAP)
RFC 4251	Secure Shell (SSHv2) protocol architecture
RFC 4252	Secure Shell (SSHv2) authentication protocol
RFC 4253	Secure Shell (SSHv2) transport layer protocol
RFC 4254	Secure Shell (SSHv2) connection protocol
RFC 5246	TLS v1.2

### Services

RFC 854	Telnet protocol specification
RFC 855	Telnet option specifications
RFC 857	Telnet echo option
RFC 858	Telnet suppress go ahead option
RFC 1091	Telnet terminal-type option
RFC 1350	Trivial File Transfer Protocol (TFTP)
RFC 1985	SMTP service extension
RFC 2049	MIME
RFC 2131	DHCPv4 (server, relay and client)
RFC 2132	DHCP options and BootP vendor extensions
RFC 2616	Hypertext Transfer Protocol - HTTP/1.1
RFC 2821	Simple Mail Transfer Protocol (SMTP)
RFC 2822	Internet message format
RFC 3046	DHCP relay agent information option (DHCP option 82)
RFC 3315	DHCPv6 client
RFC 3993	Subscriber-ID suboption for DHCP relay agent option
RFC 4330	Simple Network Time Protocol (SNTP) version 4
RFC 5905	Network Time Protocol (NTP) version 4

### VLAN Support

IEEE 802.1Q	Virtual LAN (VLAN) bridges
IEEE 802.1v	VLAN classification by protocol and port
IEEE 802.3ac	VLAN tagging

### Voice over IP (VoIP)

LLDP-MED	ANSI/TIA-1057
	Voice VLAN

## Ordering Information

NAME	DESCRIPTION	INCLUDES
AT-FL-IE3-L2-01	IE300 series Layer-2 Premium license	<ul style="list-style-type: none"> <li>▶ EPSR Master</li> <li>▶ VLAN Translation</li> <li>▶ VLAN double tagging (QinQ)</li> <li>▶ UDLD</li> </ul>
AT-FL-IE3-L3-01	IE300 series Layer-3 Premium license	<ul style="list-style-type: none"> <li>▶ OSPF</li> <li>▶ OSPFv3</li> <li>▶ PIM-SM, DM and SSM</li> <li>▶ PIMv6-SM and SSM</li> <li>▶ RIP</li> <li>▶ RIPng</li> <li>▶ VRRP</li> </ul>
AT-FL-IE3-G8032	IE300 series license for ITU-T G.8032 and Ethernet CFM	<ul style="list-style-type: none"> <li>▶ ITU-T G.8032</li> <li>▶ Ethernet CFM</li> </ul>

### Switches

#### AT-IE300-12GP-80

8x 10/100/1000T,  
4x 100/1000X SFP,  
Industrial Ethernet, Layer 3 Switch, Hi-PoE Support

#### AT-IE300-12GT-80

8x 10/100/1000T,  
4x 100/1000X SFP,  
Industrial Ethernet, Layer 3 Switch

### Supported SFP Modules

Refer to the installation guide for the recommended Max. Operating Temperature according to the selected SFP module.

#### 1Gbps SFP modules

##### AT-SPBD10-13

1000LX single-mode BiDi SFP, 10 km

##### AT-SPBD10-14

1000LX single-mode BiDi SFP, 10 km

##### AT-SPBD20-13/I

Small Form Pluggable, 20 km, industrial temperature

##### AT-SPBD20-14/I

Small Form Pluggable, 20 km, industrial temperature

##### AT-SPEX

1000X (LC) SFP, 2 km

##### AT-SPLX10

1000LX (LC) SFP, 10 km

##### AT-SPLX10/I

1000LX (LC) SFP, 10km, industrial temperature

##### AT-SPLX40

1000LX (LC) SFP, 40 km

##### AT-SPSX

1000SX (LC) SFP, 550 m

##### AT-SPSX/I

1000SX (LC) SFP, 550 m, industrial temperature

##### AT-SPTX

1000T SFP, 100 m

##### AT-SPZX80

1000ZX (LC) SFP, 80 km

#### 100Mbps SFP modules

##### AT-SPFX/2

100FX (LC) SFP, 2 km

##### AT-SPFX/15

100FX (LC) SFP, 15 km

##### AT-SPFXBD-LC-13

100FX (LC) single-mode BiDi SFP, 15 km

##### AT-S PFXBD-LC-15

100FX (LC) single-mode BiDi SFP, 15 km