

Product Specifications

300Mbps 802.11n Outdoor Wireless AP

WAP-552N

Version 1.0

This document contains confidential proprietary information and is property of PLANET. The contents of this document should not be disclosed to unauthorized persons without the written consent of PLANET.

Change History:

Revision:	Date:	Author:	Change List:
Version 1.0	2017-12-05	Miki Chou	Initial release

Author	Miki Chou	Editor:	Miki Chou
Approved by:	Kent Kang	Project Leader:	Kent Kang

1. PRODUCT DESCRIPTION



Cost-effective Wireless Solution with Superior Performance

PLANET WAP-552N 300Mbps 802.11n Outdoor Wireless AP offers a better range and excellent throughput than those of the traditional 802.11a wireless device. Via the adjustable transmit power and N-type antenna connectors, it can directly connect with various high gain antennas to extend wider coverage, thus heightening the performance of a long-distance connectivity.

Designed for Various Requirements

The WAP-552N is specifically designed for those difficult to construct network infrastructure through cable. It is capable to bridge remote sites without considering antenna alignment through the omnidirectional antennas, which are suitable to work with IP surveillance system. Besides, subscribers are able to achieve various wireless connectivities (AP, Gateway, WDS, Repeater and WISP) by replacing any high-gain or directional outdoor antennas, thus meeting comprehensive application requirements.

Advanced Security and Rigorous Authentication

The WAP-552N supports 128-bit WEP, WPA / WPA2, WPA-PSK and WPA2-PSK wireless encryptions, the advanced WPA2-AES mechanism and 802.1X RADIUS authentication, which can effectively prevent eavesdropping by unauthorized users or bandwidth occupied by unauthenticated wireless access. Furthermore, any users are granted or denied access to the wireless LAN network based on the ACL (Access Control List) that the administrator pre-established. For management purposes, the IEEE 802.1Q VLAN supported allows multiple VLAN tags to be mapped to multiple SSIDs to distinguish the wireless access.

Flexible and Reliable Outdoor Characteristics

Meeting the IP67 rating aluminum enclosure, the WAP-552N can perform normally under rigorous weather conditions, meaning it can be installed in any harsh, outdoor environments. With the standard IEEE 802.3af/at Power over Ethernet (PoE) design, the WAP-552N can be easily installed in the areas where power outlets are not available.

Easy Deployment and Management

With user-friendly Web UI and comprehensive management features like client limit control and coverage threshold, the WAP-552N is easy to limit the client access, even for users who never experience in setting up a wireless network. Furthermore, with the PLANET SNMP-based centralized management and PLANET Smart Discovery Utility, the WAP-552N is convenient to be managed remotely.

2. PRODUCT FEATURES

- **Industrial Compliant Wireless LAN and LAN**
 - Compliant with the IEEE 802.11a/n wireless technology
 - 2T2R architecture with data rate of up to 300Mbps
 - Equipped with 10/100Mbps RJ45 port, auto MDI/MDI-X supported
- **Fixed-network Broadband Router**
 - Supported WAN connection types: DHCP, Static IP, PPPoE
 - Supports Port Forwarding and DMZ for various networking applications
 - Supports DHCP server in Gateway/WISP mode
- **RF Interface Characteristics**
 - Built-in two N-type connectors
 - High output power with multiply-adjustable transmit power control
- **Outdoor Environmental Characteristics**
 - Sturdy aluminum case with IP67-rated protection
 - IEEE 802.3af/at Power over Ethernet design
 - Operating temperature: -40~70 degrees C

➤ **Multiple Operation Modes and Wireless Features**

- Multiple operation modes: AP, Gateway, Repeater, WDS, WISP
- WMM (Wi-Fi multimedia) provides higher priority to multimedia transmitting over wireless
- Coverage threshold to limit the weak signal of clients occupying session
- Real-time Wi-Fi channel analysis chart and client limit control for better performance

➤ **Secure Network Connection**

- Full encryption supported: 64-/128-bit WEP, WPA/WPA2, WPA-PSK/WPA2-PSK and 802.1X RADIUS authentication
- Supports 802.1Q VLAN and SSID-to-VLAN mapping
- Supports IP/Port/MAC address/URL filtering, DoS, SPI Firewall
- Supports DMZ and Port forwarding
- Bandwidth control per IP address to increase network stability

➤ **Easy Deployment and Management**

- Supports PLANET AP Controllers in AP mode
- Easy discovery by PLANET Smart Discovery
- Self-healing mechanism through system auto reboot setting
- System status monitoring through remote Syslog Server
- Supports PLANET DDNS/Easy DDNS

3. PRODUCT SPECIFICATIONS

3.1 MAIN COMPONENTS

SoC	Atheros AR9344
RAM	64MB
Flash	8MB

3.2 FUNCTIONAL SPECIFICATIONS

Product	WAP-552N
	300Mbps 802.11n Outdoor Wireless AP
Hardware	
Standard Support	IEEE 802.11a/n IEEE 802.11i IEEE 802.3 10BASE-T IEEE 802.3u 100BASE-TX IEEE 802.3x flow control
Material	Aluminum
Dimensions (W x D x H)	153.2 x 79.5 x 234.5mm
Weight	2kg
Power Requirement	48V 0.5A, IEEE 802.3af/at PoE+
Power Consumption (max.)	< 13W
Mounting Type	Mast mounting
Interface	Wireless IEEE 802.11a/n, 2T2R PoE LAN: 1 x 10/100BASE-TX, auto-MDI/MDIX, 802.3af/at PoE In
Button	Reset button
Antenna	Built-in two N-type connectors
Data Rate	IEEE 802.11a: up to 54Mbps IEEE 802.11n (20MHz): up to 150Mbps IEEE 802.11n (40MHz): up to 300Mbps
Media Access Control	CSMA/CA
Modulation	802.11a/n: OFDM (BPSK/ QPSK/ 16QAM/ 64QAM)
Frequency Band	FCC: 5.180~5.240GHz, 5.745~5.825GHz ETSI: 5.180~5.700GHz

Operating Channels	FCC: 36, 40, 44, 48, 149, 153, 157, 161, 165 (9 channels) ETSI: 36, 40, 44, 48, 52, 56, 60, 64, 100, 104, 108, 112, 116, 132, 136, 140 (16 channels) 5GHz channel list will vary in different countries according to their regulations.		
Max. Transmit Power (dBm)	FCC: up to 27 ± 2dBm ETSI: < 20dBm (EIRP)		
Receiver Sensitivity (dBm)	Network Mode	Data Rate	Receive Sensitivity (dBm)
	802.11a	6Mbps	-92
		54Mbps	-75
	802.11n HT20	MCS0/MCS8	-91
		MCS7/MCS15	-72
802.11n HT40	MCS0/MCS8	-88	
	MCS7/MCS15	-70	
Environment & Certification			
Operating Temperature	-40 ~ 70 degrees C		
Operating Humidity	10 ~ 90% (non-condensing)		
IP Level	IP67		
ESD Protection	± 8kV air-gap discharge ± 4kV contact discharge		
Surge Protection	± 4kV		
Regulatory	CE, RoHS		
Software			
LAN	Static IP		
	Supports IP-MAC binding		
WAN Type (GW/WISP mode)	<ul style="list-style-type: none"> ■ Static IP ■ Dynamic IP ■ PPPoE 		
Wireless Modes	<ul style="list-style-type: none"> ■ Access Point ■ Gateway ■ Repeater ■ WDS (AP/Bridge/Station) ■ WISP 		
Channel Width	20MHz, 40MHz		
Encryption Type	64-/128-bit WEP, WPA, WPA-PSK, WPA2, WPA2-PSK, 802.1X		
Wireless Security	Enable/Disable SSID Broadcast		
	Wireless MAC address filtering		
	User Isolation		
Max. SSIDs	4		
Max. Wireless Clients	64 per radio (50 are suggested, depending on usage)		

Max. WDS Peers	4
Wireless QoS	Supports Wi-Fi Multimedia (WMM)
Wireless Advanced	Auto Channel Selection
	5-level Transmit Power Control (100%, 75%, 50%, 25%, 12.5%)
	Client Limit Control, Coverage Threshold
	Distance control (Auto Ack Timeout)
	Wi-Fi channel analysis chart
Status Monitoring	Device status, Wireless client List
	PLANET Smart Discovery
	DHCP client table
	System Log supports remote syslog server
VLAN	IEEE 802.1Q VLAN (VID: 3~4094)
	SSID-to-VLAN mapping up to 4 SSIDs
Self-healing	Supports auto reboot settings per day/hour
Management	Supports PLANET Hardware AP Controller/ Software AP Controller Applicable controllers ^[1] : WAPC-500, WAPC-1000, SAPC
	Remote management through PLANET DDNS/ Easy DDNS
	Configuration backup and restore
	Supports UPnP
	Supports IGMP Proxy
	Supports PPTP/L2TP/IPSec VPN Pass-through
SNMP v1/v2c/v3 support, MIB I/II, Private MIB	
Remarks	*1. ^ the feature will be supported through firmware/system upgrade


3.3 PHYSICAL SPECIFICATIONS

Physical Specifications	
Dimensions (W x D x H)	153.2 x 79.5 x 234.5mm
Weight	2kg

Appearance



Port & Connector

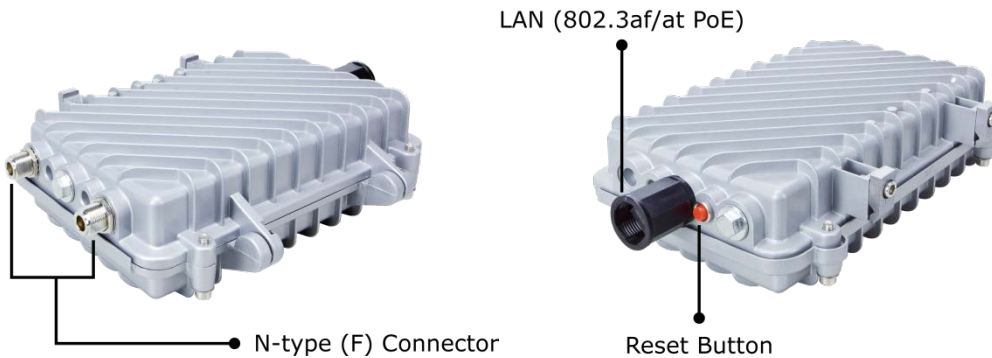

Hardware Interface Definition

Object	Description
Antenna Connectors	2 N-type (female) antenna connectors
PoE LAN Port	10/100Mbps RJ45 port, auto MDI/MDI-X 802.3af/at PoE+ supported, 48VDC In
Reset Button	Press and hold the Reset button on the PCBA for over 15 seconds to return to the factory default setting.

3.4 ENVIRONMENTAL SPECIFICATIONS

Environmental Specifications	
Temperature	Operating: -40 ~ 70 degrees C Storage: -40 ~ 75 degrees C
Humidity	Operating: 10 ~ 90% (non-condensing) Storage: 5 ~ 90% (non-condensing)

3.5 BASIC PACKAGING

- WAP-552N
- Quick Installation Guide x 1
- RJ45 Waterproof Kit x 1
- L-type Bracket x 2
- U-bolt Kit x 2

3.6 PACKAGING INFORMATION

Packaging Information	
Dimensions (W x D x H)	380 x 259 x 170mm
Weight	2.15kg (gross weight)

APPENDIX: Default Settings

System	
Device Name	WAP-552N
Firmware Version	1.0
Connection Type (LAN IP)	Static IP
IP Address	192.168.1.253
Gateway	192.168.1.253
Subnet Mask	255.255.255.0
Wireless Settings	
Operation Mode	Access Point
Mode	802.11AN
Bandwidth	40MHz
SSID	PLANET_5GHz
Channel	5.8G: 36 (ETSI region)/ 149 (FCC region)
Wireless Advanced Settings	
RF Output Power	100%
Data Rate	Auto
Transmit Power	Auto
RTS Threshold (0-2347)	2346
Max User (0-64)	64
Coverage Threshold (-95~-65dBm)	-90