



IP KVM Switches

Remotely Access your Servers from Anywhere

PLANET offers a complete 8/16-Port Combo IP KVM Switch solution, including PS/2-USB VGA KVM and PS/2-USB VGA LCD KVM, for company server room or testing facilities. With the innovative IP-based technology, PLANET has turned the traditional KVM switches into true networking devices.

From across the room, down the street or halfway around the globe, PLANET Combo IP KVM Switch Series can be accessed from any computer on the LAN, WAN or Internet. Multiple computers can be managed via only one single set of monitor, keyboard and mouse directly. The iMac, Power Mac and Sun systems are also supported.



Moreover, PLANET Combo IP KVM Switch Series features the patented design of the availability of USB and PS/2 interface connection, user-friendly OSD utility and daisy-chain function. The Combo IP KVM Switch solution frees up more table and rack space for users in addition to saving the cost of multiple keyboards, mice and monitors.


Remote Management with IP-based Technology



Computer Switching

There are three convenient methods provided by PLANET Combo IP KVM Switch Series to access any computer connected to the installation:

- Port select button
- Hotkeys on keyboard
- OSD (on screen display) at local client and remote client

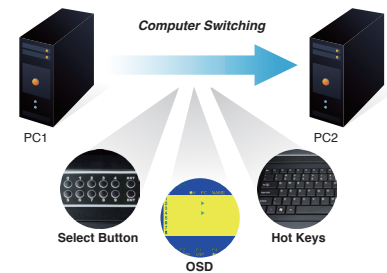

	Combo KVM	Combo IP KVM	Combo LCD KVM	Combo IP LCD KVM
Model	KVM-210-08 KVM-210-16	IKVM-210-08 IKVM-210-16	KVM-210-08M KVM-210-16M	IKVM-210-08M IKVM-210-16M

Product Image



Hardware					
Number of Ports		8/16			
Maximum Controlling Units		64/256			
PC Ports	Keyboard	PS/2 Female + USB Type A Female			
	Mouse	PS/2 Female + USB Type A Female			
	Video	8/16 x HDB-15 female			
Console Ports	Keyboard	PS/2 Female + USB Type A Female	-	-	
	Mouse	PS/2 Female + USB Type A Female	-	-	
	Video	1 x HDB-15 female	-	-	
LCD Panel	Monitor	-	-	17" SXGA Color TFT-LCD	
	Video Resolution	-	-	1280 x 1024	
	Pixel Pitch	-	-	0.297 x 0.297 mm	
	Color	-	-	16.2 M / 262K colors	
	Contrast Ratio	-	-	1000:1	
	Backlight	-	-	LED	
Remote Video Resolution		-	-	-	1920 x 1080
LAN Ports		-	1 x RJ45 Female for 10/100/1000BASE-T	-	1 x RJ45 Female for 10/100/1000BASE-T
USB Port		-	-	3 x USB 2.0 Type A female	
Keyboard		-	-	100 keys	
Touch Pad		-	-	1	
Button		1 x Reset button, 8/16 x Select button		-	-
Video Resolution		2048 x 1536	Local console: 2048 x 1536 Remote console: 1920 x 1080	1280 x 1024	Local console: 1280 x 1024 Remote console: 1920 x 1080
Dimensions (W x D x H)		432 x 155 x 44 mm		611 x 555.5 x 44.5 mm	
Weight		2.2kg		17.52kg	
Installation		1U rack-mountable, desktop		1U rack-mountable	
Network and Configuration					
Network Standard		-	IEEE 802.3 10BASE-T IEEE 802.3u 100BASE-TX IEEE 802.3ab 1000BASE-T	-	IEEE 802.3 10BASE-T IEEE 802.3u 100BASE-TX IEEE 802.3ab 1000BASE-T
Supported Protocol		-	TCP, IP, HTTP	-	TCP, IP, HTTP
Security		-	DES, AES and 3DES	-	DES, AES and 3DES
Management					
PC Selection		Port select button / Hotkeys on keyboard / OSD (on screen display)			
Scan Interval		5~60 seconds			
Security		User password and Super password			
Environment & Certification					
Operating Temperature		-10 ~ 50 degrees C		0 ~ 50 degrees C	
Operating Humidity		0 ~ 90%			
Regulatory		CE, FCC			

