


HDMI user manual


Thank you for purchasing this products. For optimum performance and safety ,please read all instructions before you connecting,operating or adjusting this equipment. Please keep this manual for future reference.

2 Ports HDMI splitter duplicates one way HDMI source to two displays. Its supported features including up to 10.2Gbps data rate, 12bit deep color, 3D, Lipsync and high definition lossless audio. This HDMI splitter support 1080P PC resolution. It is best for use to transmute one HDMI signal to two displays.

Interface description



Connection diagram

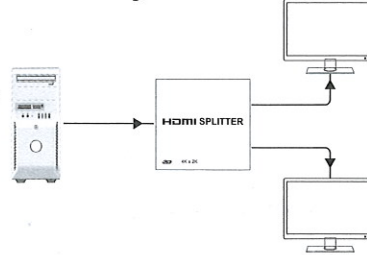

Use instructions :

1. With a HDMI cable, connect the HDMI signal source to the input port of the distributor.
2. With HDMI cable, the output of the distributor is connected to the monitor.
3. Connected power supply
4. Can work normally

Function :

- 1 HDMI signal input into 2 HDMI signal output
- Support 3D video format
- Support 1080P@60Hz signal input and output.
- Support 24/30/36 bit
- Support for HDCP
- Supports 3840x2160/30Hz resolution
- Audio format LPCM7.1/DTS/DOLBY-AC3/DSD/ DTS-HD/Dolby-trueHD

Product specifications :

Input interface : HDMI x 1(Female)

Output interface : HDMI x 2(Female)

Power supply interface : DC-005 x 1(Female) External USB power supply

HDMI input resolution : 480I , 480P , 576I , 576P , 720I , 720P , 1080I , 1080P, 4K

HDMI output resolution : 480I , 480P , 576I , 576P , 720I , 720P , 1080I , 1080P, 4K

Support power supply : DC 5V/0.5A

Working temperature : 0~40°C

Storage temperature: -10~75°C

Shell: Metal Case + Spray screen

Product size: 65*61*21mm

Packing: packing box