

# Reyee Series Product Overview

— **Redefine your easy network**



# Content

---

**Reyee Brand Introduction**

**Reyee Wireless Family**

**Reyee Switch Family**

**Reyee Easy Gateway Family**

**Reyee Home Wi-Fi Router Family**

**Ruijie Cloud**

# Ruijie Cloud Worldwide Proven



2 Millions+  
Devices



50 Millions+  
Users Served



200,000+  
App Installed



50+ Countries  
Covered



# Ruijie Product Strategy 2020




Ruijie Cloud

Make your business easy.

**Ruijie**  
Enterprise

**易 REYEE**  
by Ruijie

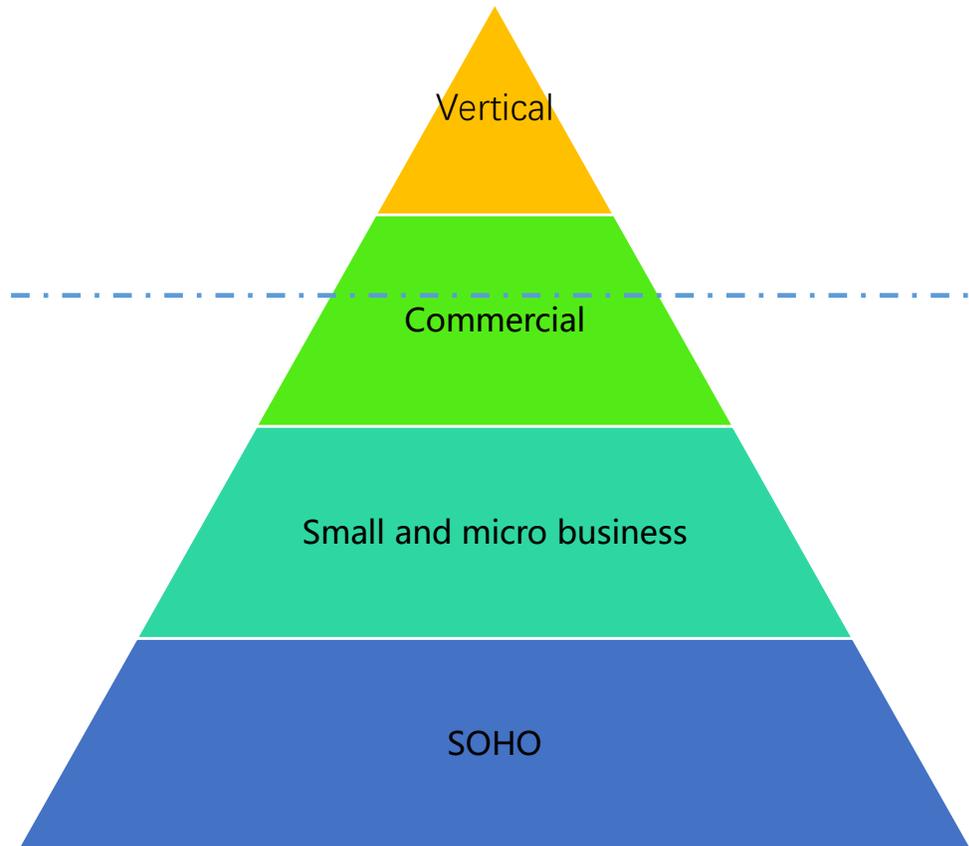



**Redefine your easy network**

# Reyee's success in China

**50%**


CAGR for 7  
consecutive years

**200K+**

Installers are using  
Reyee products

**3,000+**

New projects added on  
Ruijie cloud every day

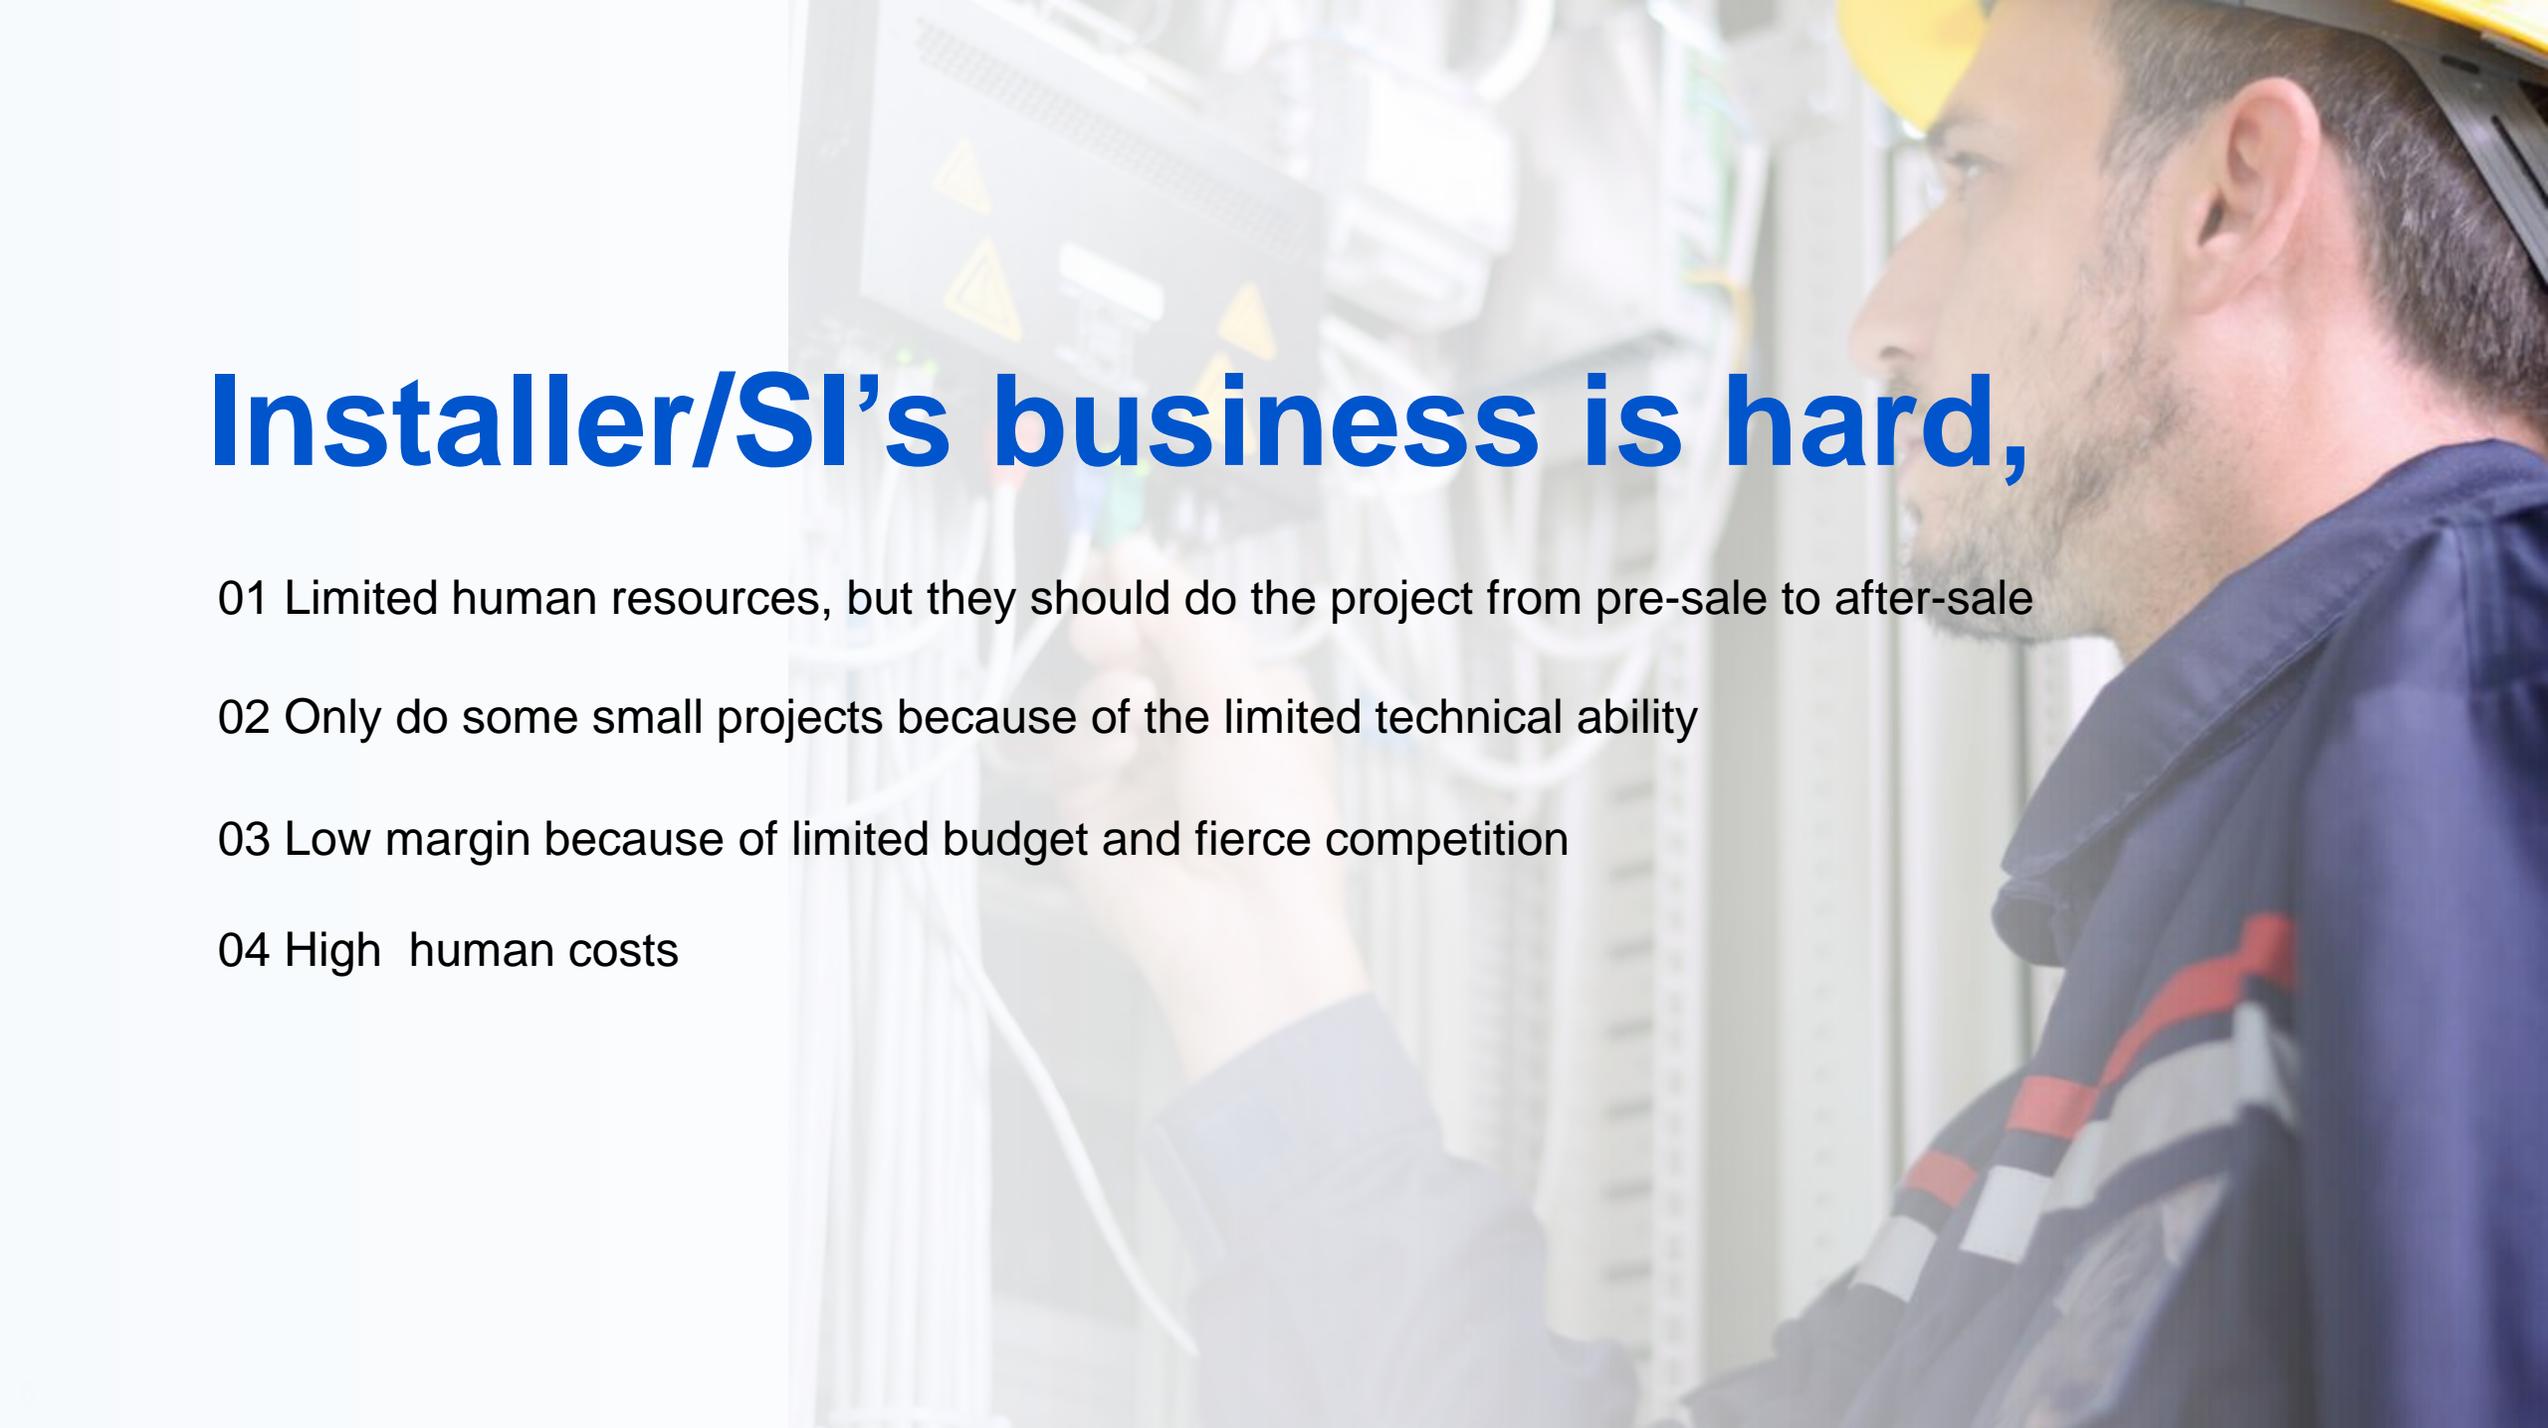

# Installer/SI's business is hard,

- 01 Limited human resources, but they should do the project from pre-sale to after-sale
- 02 Only do some small projects because of the limited technical ability
- 03 Low margin because of limited budget and fierce competition
- 04 High human costs

# Redefine your easy network



# Reyee Product Family

## Cloud Service

Ruijie Cloud for Reyee



Self-organizing Network  
Real Topology  
Delivery Report

Mobile Provisioning  
Mobile Monitoring & Alarm  
Mobile maintenance Remotely

### Switches

### Access Point

### Routers

### Home Wi-Fi

#### Unmanaged Switch

#### Cloud Managed Switch

#### Indoor AP

#### Wall AP

#### RG-EG Series

#### RG-EW Series



RG-ES05/08G

RG-ES100 Series

RG-ES200 Series



RG-RAP2200(F)

RG-RAP2200(E)

RG-RAP1200(F)

RG-RAP1200(P)



RG-EG105G

RG-EG105GW



#### L2 Smart Gigabit Switch

#### L2+ Smart Gigabit Switch

#### Outdoor AP

#### Outdoor Bridge

#### RG-EG PoE Series

#### RG-EW1200G Pro



RG-NBS3100 Series

RG-NBS5100 Series



RG-EAP602



RG-EST310



RG-EST350



RG-EG105G-P

RG-EG210G-P



RG-EW1200

RG-NBS3200 Series

RG-NBS5200 Series



# Reyee Wireless Family

# Reyee Wireless Family

## Indoor AP



RG-RAP2200(E)



RG-RAP2200(F)

## Wall Access Point



RG-RAP1200(F)



RAP1200(P)

## Outdoor Bridge



EST310



EST350

## Outdoor AP



RG-EAP602

# RAP2200 Series—— Killer Indoor AP



802.11ac Wave2



MU-MIMO



Dual-LAN



Self-organizing Network



Layer 3 Roaming



Cloud Management




RG-RAP2200(E)



RG-RAP2200(F)

# RAP1200 Series — Best Choice For Hospitality

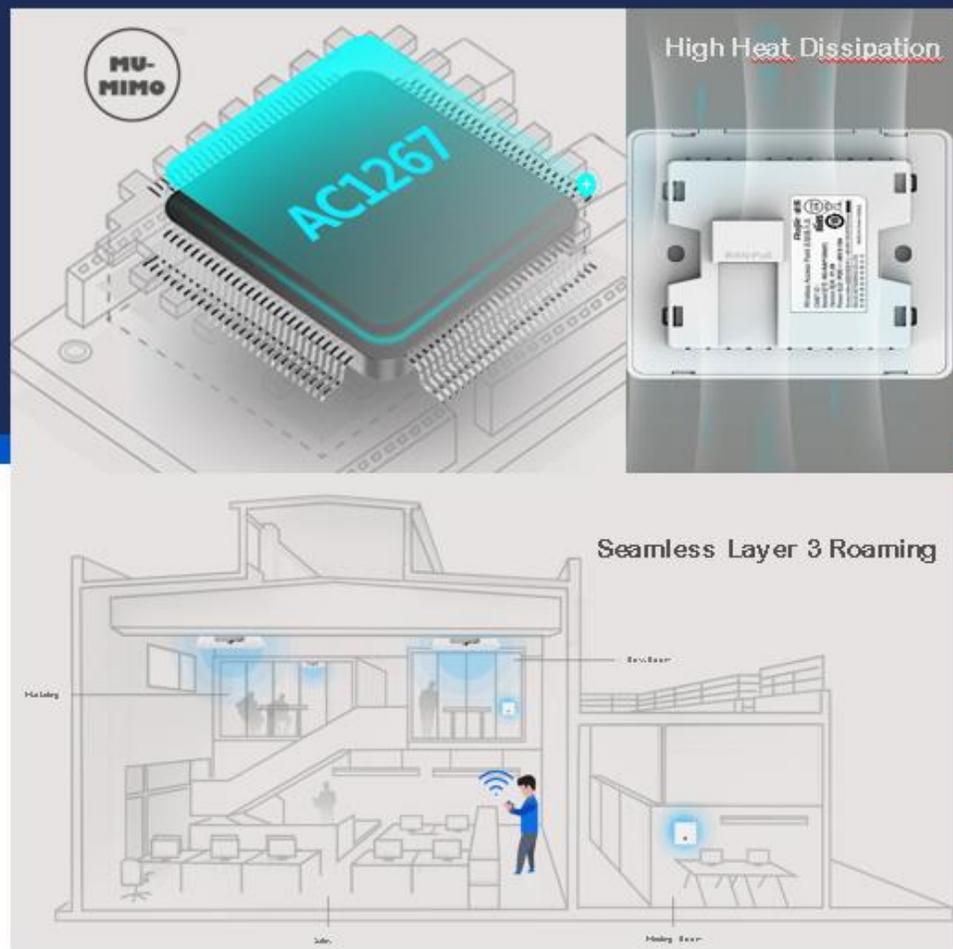

1 FE LAN

RG-RAP1200(F)

- 802.11ac Wave2
- 1.267Gbps
- Dual Band
- 1 FE LAN 1 FE Uplink



4 GE LAN

RG-RAP1200(P)

- 802.11ac Wave2
- 1.267Gbps
- Dual Band
- 4 GE LAN 1 GE Uplink
- PoE Out

# APEAP602—— Not Just Beautiful Design



802.11ac Wave2



MU-MIMO



Dual-LAN



Smart networking



Dual power supply



Cloud Management



## Dual Band Gigabit outdoor Access Point

- IP68, 6000V, V0, durable in harsh conditions;
- Dual-radio supports up to 1167Mbps, 802.11ac Wave2. Amazing 5GHz wireless coverage up to 300m, Max clients capacity 164;
- Industrial design with Dual-Lan, dual-power supplies (802.3af/at PoE or DC 12V) ;
- Internal omnidirectional antennas
- Lifetime free Ruijie Cloud management

2 GE LAN



RG-EAP602

# EAP602—— Not Just Beautiful Design

Stable wireless service  
under harsh environment



Optimum performance



802.11ac Wave2  
1167Mbps  
Coverage Radius of 300m at 5GHz  
Built-in omnidirectional antennas



# 5G Wireless Bridge RG-EST310

## Highlight features



**5GHz**  
Operating in the 5GHz band

**867Mbps**  
Throughput up to 867Mbps

**1KM**  
1KM bridge distance

**Lifetime free Ruijie Cloud management**

**Built-in directional antennas, horizontal: 60°, vertical: 30°, gain: 10dBi**

## Benefits for installers

### 01 Easy to install

Wall-mounted/ Pole-mounted (straps provided)

### 02 Easy to configure

2 devices including the recorder-end and camera-end devices are automatically paired without any configurations.

### 03 Easy to maintain


Device connection, configuration modification, entire network upgrade and wireless bridge restart supported on Ruijie Cloud.




RG-EST310




# EST310 - Easy Solution for CCTV

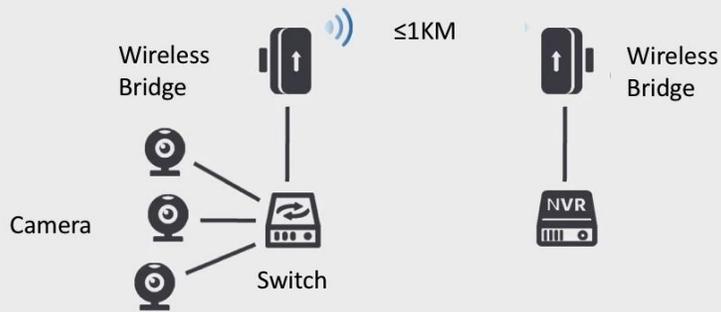

The camera deployment is centralized,  
Solution: Point to Point bridge

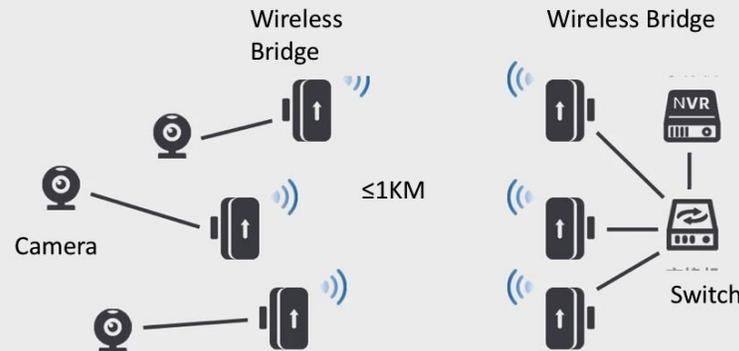


The cameras are scattered,  
Solution: Point to Point bridge

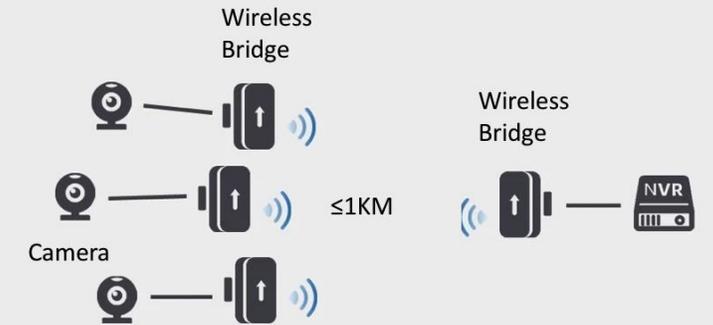

The cameras are scattered,  
Solution: Point to Multi-Point bridge

# Typical scenarios- Elevator

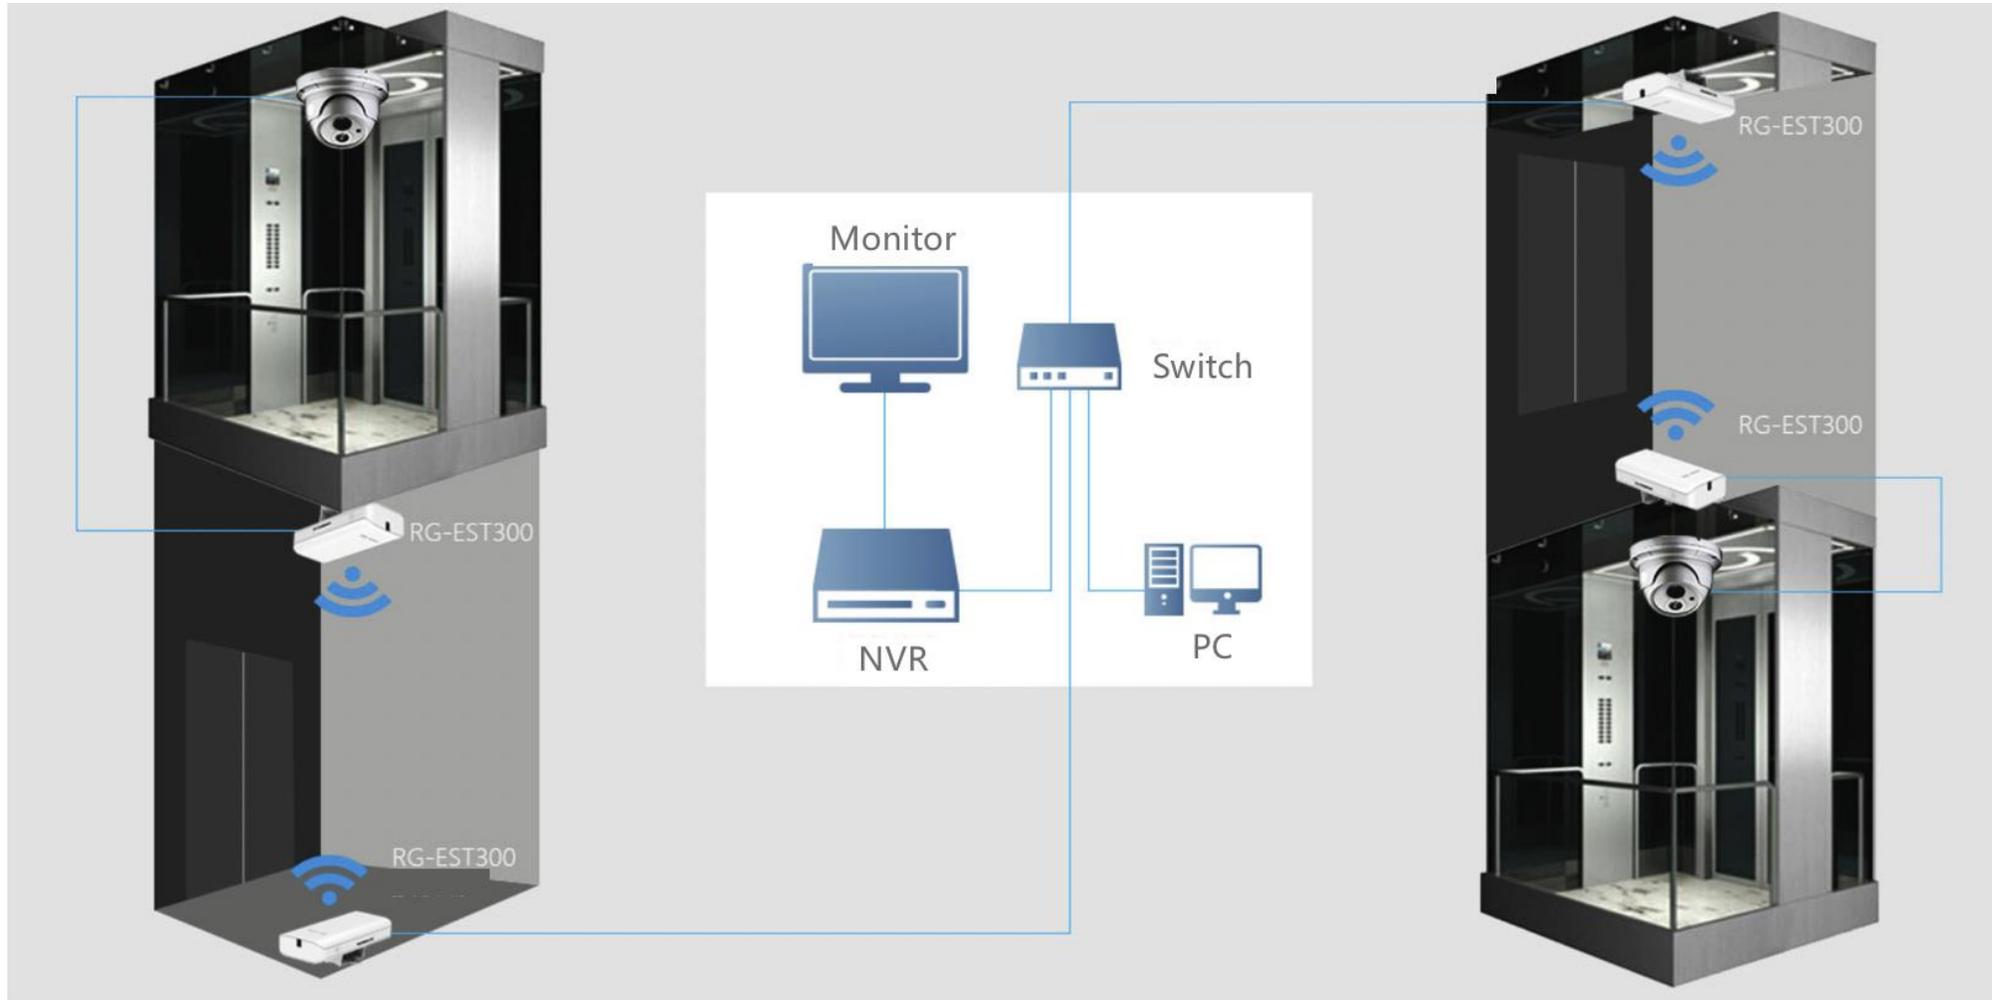



# Reyee Switch Family

# Reyee Switch Family

## Unmanaged Plastic switch



RG-ES05/08G

## Unmanaged Steel switch



RG-ES100 Series

## L2 Smart Gigabit Switch



RG-NBS3100 Series



RG-NBS3200 Series

## Cloud Managed Switch



RG-ES200 Series

## L2+ Smart Gigabit Switch



RG-NBS5100 Series



RG-NBS5200 Series


# Reyee Unmanaged Switch Family



Plug and Play



Easy to Install

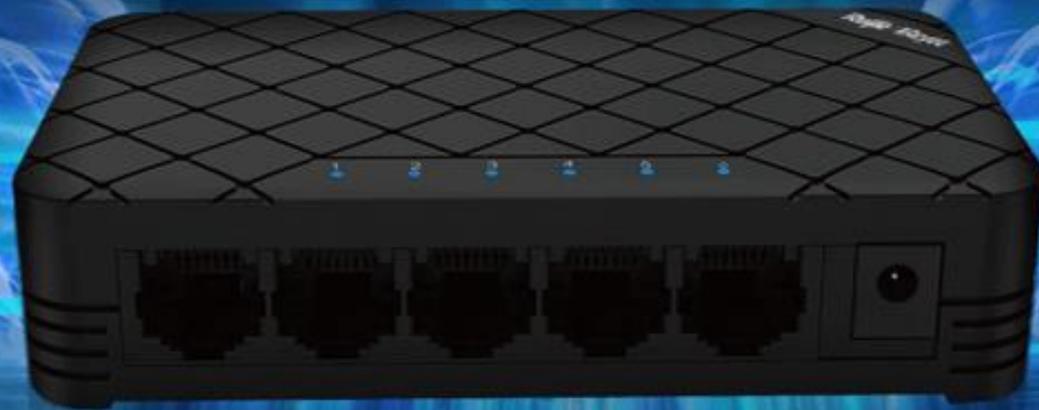

Exquisite Design, Powerful Performance



Enterprise-Grade Quality



Plastic and Metal Casing



RG-ES105D  
5-Port 10/100Mbps  
Metal Case



RG-ES108D  
8-Port 10/100Mbps  
Metal Case



RG-ES05G  
5-Port GE Plastic Case



RG-ES08G  
8-Port GE Plastic Case



RG-ES105GD  
5-Port GE Metal Case



RG-ES108GD  
8-Port GE Metal Case



RG-ES109G-LP-L  
9-Port GE Metal Case  
54W POE Output



RG-ES126G-P-L  
26-Port GE Metal Case,  
370W POE Output



RG-ES126G-LP-L  
26-Port GE Metal Case,  
180W POE Output

# Cloud Managed Switch Family

## Cloud Managed Switch for CCTV



RG-ES205GC-P  
4\*GE(POE+) + 1\*GE,  
54W Output



RG-ES209GC-P  
8\*GE(POE+) + 1\*GE,  
120W Output



RG-ES218GC-P  
16\*GE(POE+) + 2\*SFP, 240W Output



RG-ES226GC-P  
24\*GE(POE+) + 2\*SFP, 370W Output



RG-ES216GC  
16\*GE, Non-POE



RG-ES224GC  
24\*GE, Non-POE

## L2 Managed Gigabit Switch



RG-NBS3200-24SFP/8GT4XS  
24\*SFP + 8\*GE Combo + 4\*10G SFP+



RG-NBS3200-24GT4XS  
RG-NBS3200-24GT4XS-P  
24\*GE + 4\*10G SFP+, 370W Output



RG-NBS3200-48GT4XS  
RG-NBS3200-48GT4XS-P  
48\*GE + 4\*10G SFP+, 370W Output



RG-NBS3100-8GT2SFP  
RG-NBS3100-8GT2SFP-P  
8\*GE + 2\*SFP, 125W Output



RG-NBS3100-24GT4SFP  
RG-NBS3100-24GT4SFP-P  
24\*GE + 4\*SFP, 370W Output

## L2+ Managed Gigabit Switch



RG-NBS5200-24SFP/8GT4XS  
24\*SFP + 8\*GE Combo + 4\*10G SFP+



RG-NBS5200-48GT4XS  
48\*GE + 4\*10G SFP+



RG-NBS5200-24GT4XS  
24\*GE + 4\*10G SFP+



RG-NBS5100-48GT4SFP  
48\*GE + 4\*SFP




RG-NBS5100-24GT4SFP  
24\*GE + 4\*SFP



# Cloud Managed Switch for CCTV

## ES200 Series Intelligent Monitoring Switch

- Support Ruijie Cloud management, maintenance remotely by mobile APP
- Support POE reboot remotely, solve camera failure issues just 1-click
- Support various real-time alarm, newbie can also do troubleshooting
- Support self-organization network and auto-topology, easy to provisioning

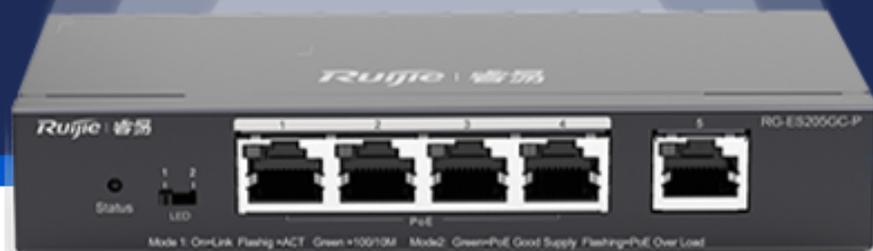

**Long-distance Transmission**

After long-distance data transmission is enabled, the transmission and speed of port will be changed to full-duplex/10Mbps

Interface No. 1 Aggregate Interface No. Ruijie Device

■ Available □ Unavailable ■ Configured

**Select Ports**


1 2 3 4 5



RG-ES205GC-P  
4\*GE(POE+) + 1\*GE,  
54W Output



RG-ES209GC-P  
8\*GE(POE+) + 1\*GE,  
120W Output

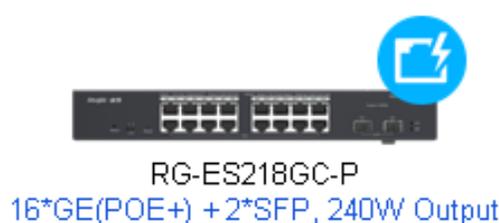

RG-ES218GC-P  
16\*GE(POE+) + 2\*SFP, 240W Output



RG-ES226GC-P  
24\*GE(POE+) + 2\*SFP, 370W Output



RG-ES216GC  
16\*GE, Non-POE



RG-ES224GC  
24\*GE, Non-POE

# Cloud Managed Switch

## NBS3100 Series L2 Switch



- Energy Saving Design.
- 6KV Surge Protection Ensuring Product Stability
- Self-organization Network Allows One-step Project Management
- Mobile App/ MACC Cloud Platform Remote Management




Model	RG-NBS3100-8GT2SFP	RG-NBS3100-8GT2SFP-P	RG-NBS3100-24GT4SFP	RG-NBS3100-24GT4SFP-P
Ports	8GE+2SFP	8GE(PoE)+2SFP	24GE+4SFP	24GE(PoE)+4SFP
Forwarding Rate	15Mpps	15Mpps	42Mpps	42Mpps
Max. Power per POE Port	N/A	30W	N/A	30W
PoE Power Budget	N/A	125W	N/A	370W
Mount	Desktop		19" standard rack-mountable	
Working Temperature	0 - 50°C			
L2 Features	VLAN, DHCP Snooping, EEE, RLDLP, Link Aggregation, Port Mirroring, QoS(Port-based speed limit (ingress/egress) ), ACL, Spanning Tree			
Management	WEWeb Smart / Cloud Management / SON			
Warranty	5 Years free warranty			

# Reyee Cloud Managed Switch

## NBS3200 Series L2 Switch

- 10G Uplink supported.
- Flexible VLAN division for different user and service.
- 6KV Surge protection ensuring product stability.
- Self-organized network allowing one-step project management.
- Mobile App/ MACC Cloud platform remote management.

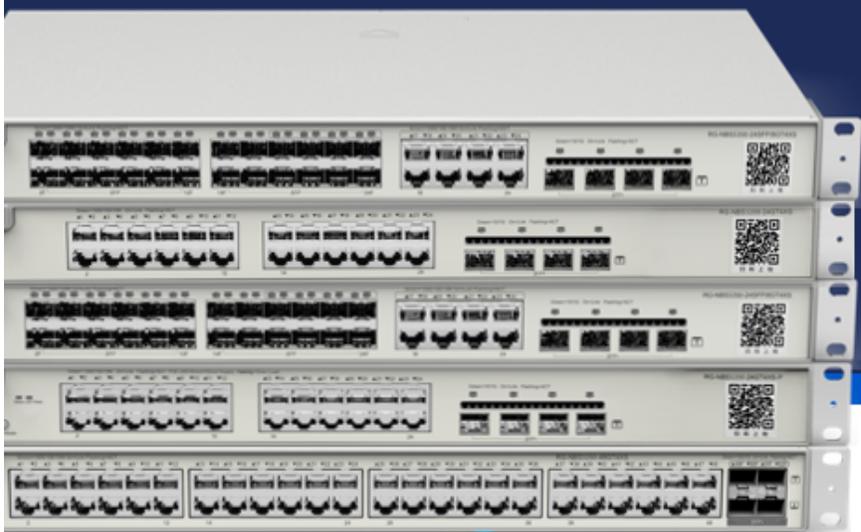

Model	RG-NBS3200-24GT4XS	RG-NBS3200-48GT4XS	RG-NBS3200-24SFP/8GT4XS	RG-NBS3200-24GT4XS-P	RG-NBS3200-48GT4XS-P
Ports	24GE+4XS	48GE+4XS	24SFP/8GT+4XS	24GE PoE+4XS	48GE PoE+4XS
Forwarding Rate	108Mpps	144Mpps	108Mpps	108Mpps	144Mpps
POE	N/A			Max. PoE/PoE+ output 370W Max. output per port: 30W	Max. PoE/PoE+ output 370W Max. output per port: 30W
Mount	Standard rack (19')				
Working Temperature	0-50°C				
L2 Features	VLAN, DHCP Snooping, EEE, RLDLP, Link Aggregation, Port Mirroring, QoS(Port-based speed limit (ingress/egress) ), ACL, Spanning Tree				
Management	WEB、Ruijie Cloud、Ruijie Cloud APP				
Warranty	5 Years free warranty				

# Put Your 10G Network Into Your Phone

Outstanding Performance Powered by the Powerful Hardware

**Switching Capacity/  
Packet Forwarding Rate**

Up to 336Gbps/ 144Mpps

**MAC/ ACL Capacity**

Up to 16K/ 1900

**RAM/ Cache**

Up to 1G/ 16M


**Number of VLANs**

Up to 4094



**Ports**

4 fixed 10G SFP+ ports  
Support DDM for the  
optical modules

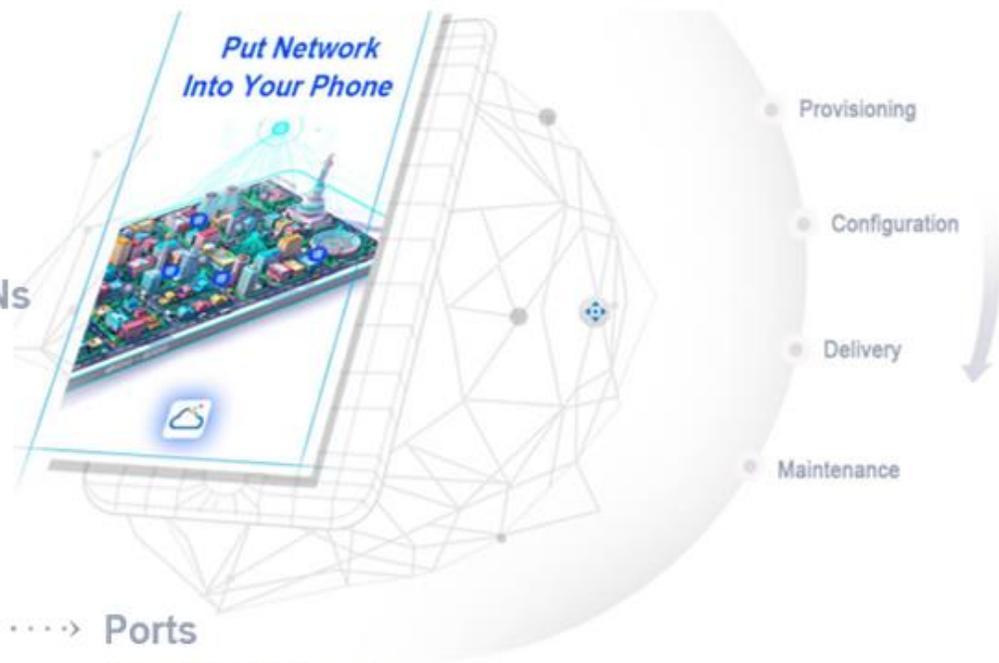

**6000V Surge Protection**



# Reyee Cloud Managed Switch

## NBS5100 Series L2+ Switch

- Energy Saving
- 6K Surge Protection Ensuring Product Stability
- Auto-networking Allowing One -step Project Management
- Mobile App/ MACC Cloud Platform Remote Management



RG-NBS5100-24GT4SFP  
24\*GE + 4\*SFP




RG-NBS5100-48GT4SFP  
48\*GE + 4\*SFP

Model	RG-NBS5100-24GT4SFP	RG-NBS5100-48GT4SFP
Ports	24GE+4SFP	48GE+4SFP
Forwarding Rate	51Mpps	87Mpps
Mount	Standard rack (19')	
Working Temperature	0-50°C	
L2 Features	VLAN, DHCP Snooping, EEE, RLDP, Link Aggregation, Port Mirroring, QoS(Port-based speed limit (ingress/egress) ), ACL, Spanning Tree	
L2+ Features	Static Route	
Management	WEB、Ruijie Cloud、Ruijie Cloud APP	
Warranty	5 Years free warranty	

# Cloud Managed Switch

## NBS5200 Series L2+ Switch

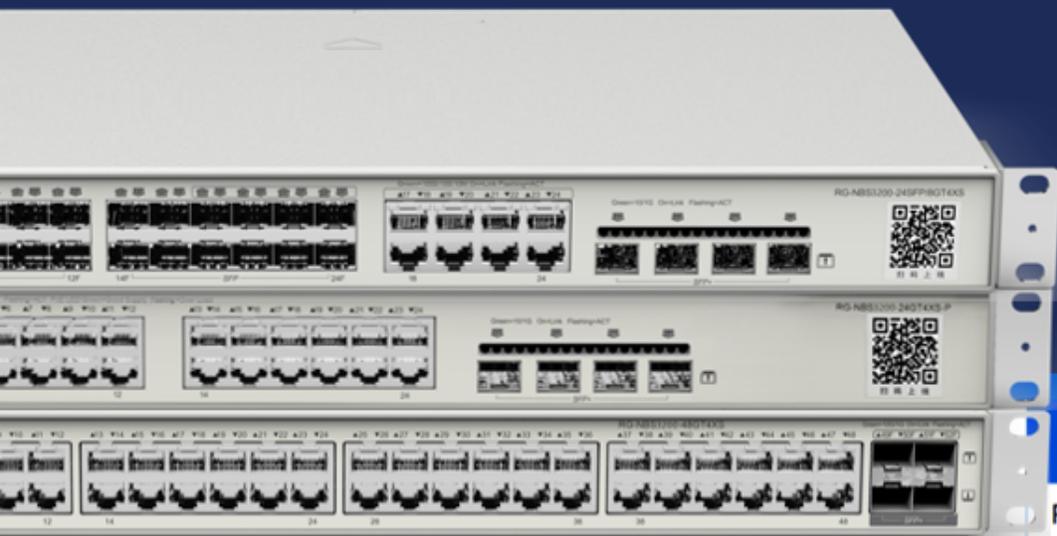

- 10G Uplink supported.
- Energy Saving
- 6K Surge Protection Ensuring Product Stability
- Auto-networking Allowing One-step Project Management
- Mobile App/ MACC Cloud Platform Remote Management



RG-NBS5200-24GT4XS  
24\*GE + 4\*10G SFP+



RG-NBS5200-48GT4XS  
48\*GE + 4\*10G SFP+



RG-NBS5200-24SFP/8GT4XS  
24\*SFP + 8\*GE Combo + 4\*10G SFP+

Model	RG-NBS5200-24GT4XS	RG-NBS5200-48GT4XS	RG-NBS5200-24SFP/8GT4XS
Ports	24GE+4XS	48GE+4XS	24SFP/8GT+4XS
Forwarding Rate	108Mpps	144Mpps	108Mpps
Mount	Standard rack (19')		
Working Temperature	0-50°C		
L2 Features	VLAN, DHCP Snooping, EEE, RLDLP, Link Aggregation, Port Mirroring, QoS(Port-based speed limit (ingress/egress) ), ACL, Spanning Tree		
L2+ Features	Static Route		
Management	WEB、Ruijie Cloud、Ruijie Cloud APP		
Warranty	5 Years free warranty		



# Reyee Easy Gateway Family

# Reyee Easy Gateway Family — Small is Power



Behavior Management

Enterprise VPN

Flow Control



Multiple WAN

Enterprise Security

AC Mode



RG-EG105G

RG-EG105GW

RG-EG105G-P

RG-EG210G-P

Concurrent Terminals

100

200

Downlink Bandwidth

500Mbps

600Mbps

July

Sept.

July

July



Villa



Hotel



Small office



Restaurant



Shop


# RG-EG210G-P Cloud Managed POE Router

Manage the network anytime anywhere



## High Integration for the Compact Size

Integrating router, AC and PoE switch, it can be easily installed in the ELV junction boxes of different standards. Saving the equipment space while simplifying the cable arrangement within the junction box

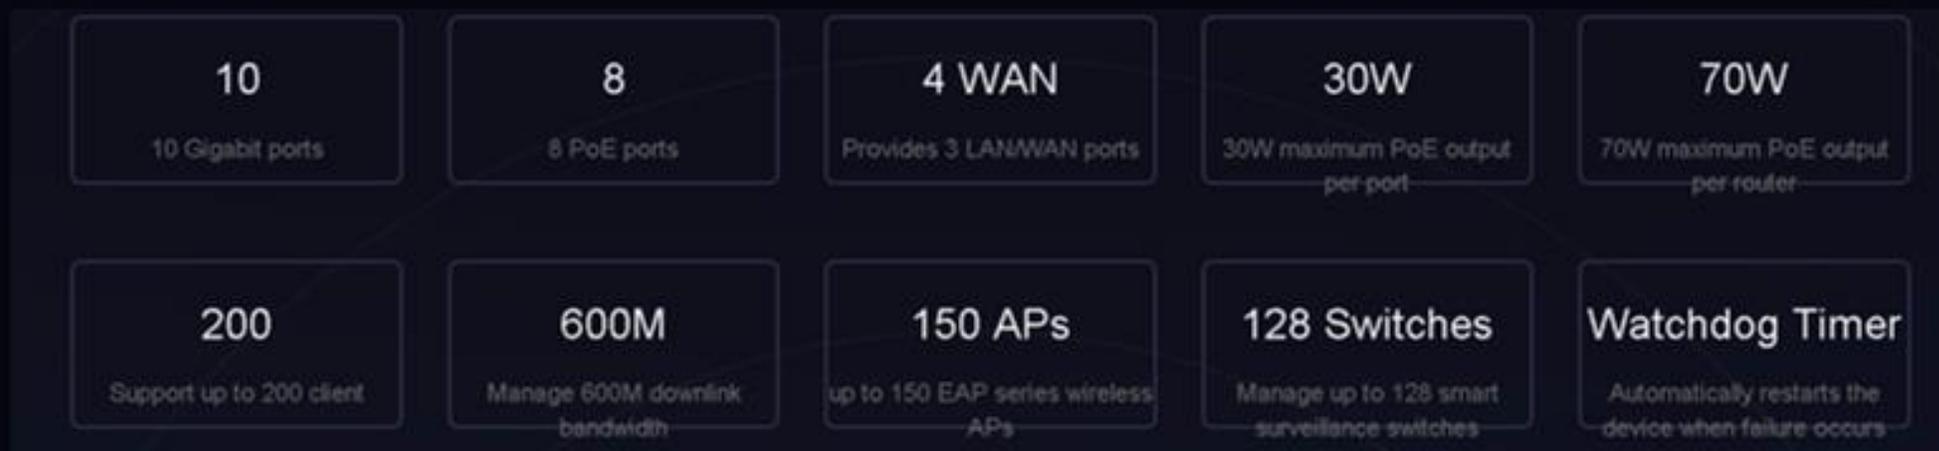


# Reyee Easy Gateway RG-EG105G-P/ RG-EG105G

- **Auto-provisioning via self-organizing network:** It realizes the industry-leading auto-discovery and auto-networking features for gateways, switches and wireless.
- **Lifetime free Ruijie Cloud managed:** Remote fault alarm, one-click operation and maintenance on Ruijie Cloud App.
- **Multiple WAN Ports:** Up to 2 WAN ports are supported.
- **Full Gigabit port :** Meet the needs of 200M xDS/fiber access, high-speed wired connectivity.
- **Smart flow control**
- **IPSec VPN:** up to 8 branches.
- **Enterprise Security features:** IP/MAC/MAC-Filtering. Independent VLAN for guest , isolated from the internal office network.



## AC Model

Able to manage Reyee APs  
No need to purchase AC separately for small networks, saving investment costs

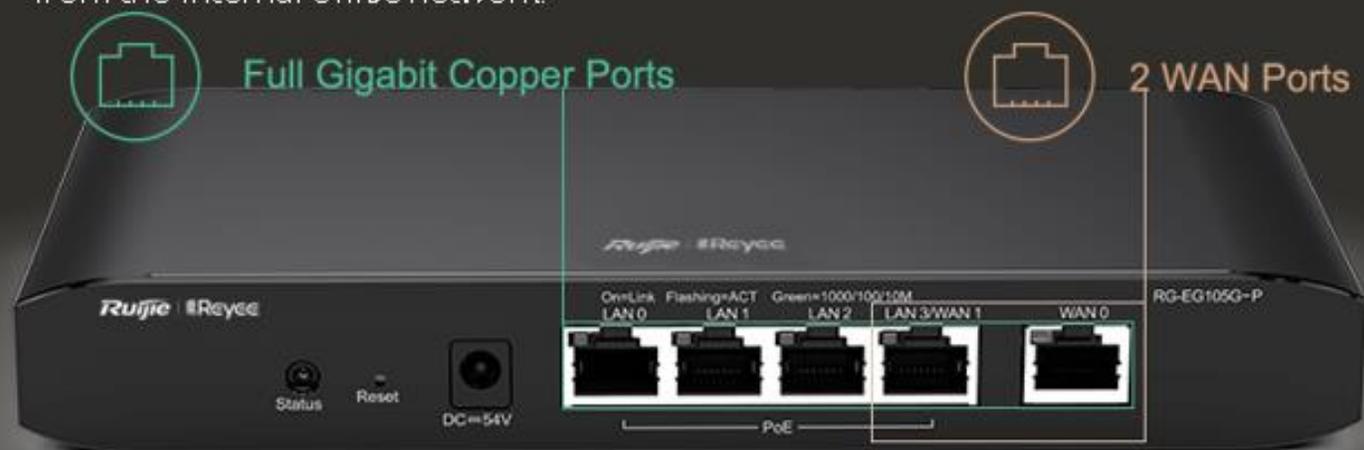

# RG-EG105GW

## Enterprise-grade Wireless Router

- Self-organizing network supported
- Lifetime free cloud management
- Multiple WAN Ports
- Online Behavior Management
- Single-cable IPTV
- Smart Flow Control
- Equipped with AC features

Dual-band  
AC1317

802.11ac  
Wave2

MU-MIMO

5 Spatial Streams  
5dBI Omnidirectional  
Antennas

Independent PA  
Independent LNA



1 WAN  
Port

3\*Gigabit  
LAN Ports

1\*LAN/W  
AN Ports

USB

# Qualcomm



Manage up to

32 EAPs

Up to

500

M (asymmetric) Bandwidth

100

Terminals

Equipped with Qualcomm's powerful enterprise-grade chip, the hardcore wireless router supports 100 terminals.



# Reyee Home Wi-Fi Router Family

# Reyee Home Wi-Fi



EW1200G PRO

- 802.11AC wave2
- 1267Mbps
- GE Ports
- Easy-Mesh
- Cloud Management



EW1200

- 802.11AC wave2
- 1167Mbps
- FE Ports
- Easy-Mesh
- Cloud Management



Dual Band



Priority to 5G

**MU-MIMO**

802.11ac Wave2



Special FEM Design



High-Gain Antennas



Smart NAT

# EW1200G PRO Introduction



## Highlight Features

- Full Gigabit Ethernet ports
- supports 802.11ac Wave2 MU-MIMO, MU-MIMO allows the device to transmit data to multiple terminals concurrently
- Reye Mesh Technology , Enables Zero-configuration Networking for Multiple Devices.
- Wi-Fi Acceleration Mode, thereby reducing game delays
- Ruijie Cloud management, support manage device remotely by mobile APP.

## Specifications

<b>Wireless specifications</b>	2.4GHz 2*2: maximum rate 400Mbps; 5GHz 2*2: maximum rate 867Mbps
	Antenna: External 6dBi omnidirectional antennas
	Support 802.11a/b/g/n/ac/ac Wave2, MU-MIMO
	Frequency band: Independent 2.4GHz and 5GHz modules, supporting dual frequency integration
	Support beamforming
<b>Ports</b>	Wi-Fi channel: 2.4GHz :2.4G~2.4835GHz 5GHz : 5.150~5.250GHz, 5.725~5.850GHz(Country Specific)
	1 10/100/1000M WAN port (Auto MDI/MDIX)
	3 10/100/1000M LAN ports (Auto MDI/MDIX)
	1 blue system LED indicator, 4 network port LED indicators
	1 device pairing/factory reset button
<b>Physical specifications</b>	1 power input interface
	Dimensions: 220x140x36mm (WxDxH, excluding antennas)
<b>Power supply</b>	Weight: 0.98kg (entire equipment including packaging)
	Power specification: DC12V 1.5A
<b>Certification</b>	Maximum power: <10W
	CE, RoHS, FCC
<b>Operating environment</b>	Operating temperature: 0-45°C
	Storage temperature: -40-70°C



Dual Band  
Full Gigabit Ports

5G

Priority to 5G

**MU-MIMO**

802.11ac Wave2



360°  
Full Cover



Special FEM Design



6dBi High-Gain  
Antennas




Smart NAT

**RG-EW1200G PRO**

# Easy-Mesh

- **Zero-Configuration Bridge Pairing**
- **Wired & Wireless Hybrid Networking**
- **Enterprise-Level Roaming**

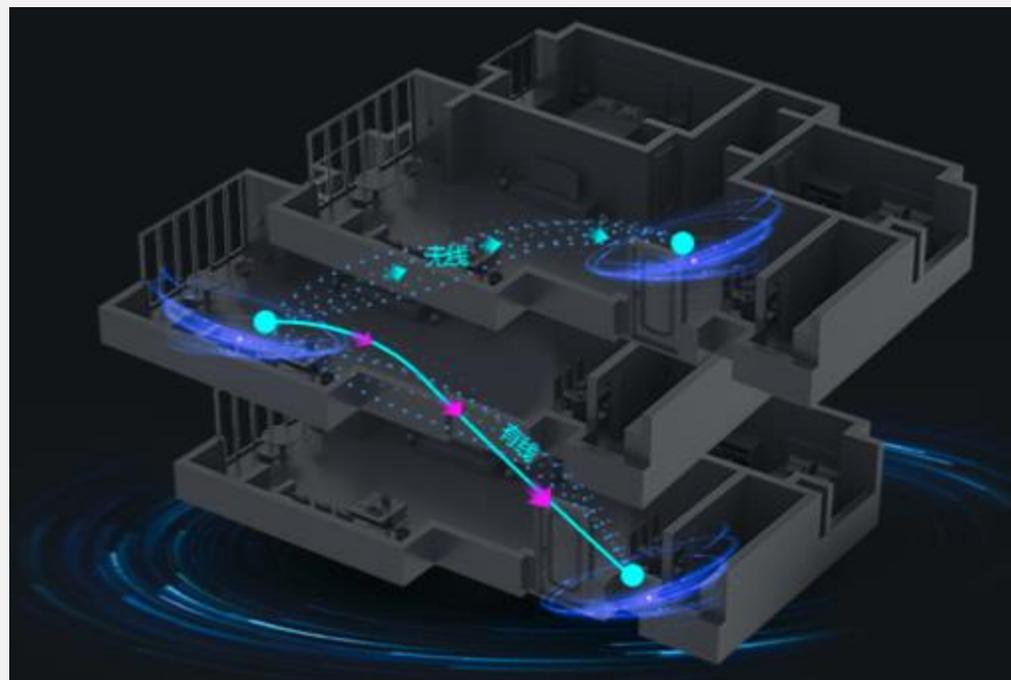

# Reyee First Home Wi-Fi EW1200G PRO



255,000 pcs

Total Sold in 6 months

# EW1200 Introduction



## Highlight Features

- Full Fast Ethernet ports
- supports 802.11ac Wave2 MU-MIMO, MU-MIMO allows the device to transmit data to multiple terminals concurrently
- Rejee Mesh Technology , Enables Zero-configuration Networking for Multiple Devices.
- Wi-Fi Acceleration Mode, thereby reducing game delays
- Ruijie Cloud management, support manage device remotely by mobile APP.

Specifications	
<b>Wireless specifications</b>	2.4GHz 2*2: maximum rate 300Mbps; 5GHz 2*2: maximum rate 867Mbps
	Antenna: External 4*5dBi omnidirectional antennas
	Support 802.11a/b/g/n/ac/ac Wave2, MU-MIMO
	Frequency band: Independent 2.4GHz and 5GHz modules, supporting dual frequency integration
	Support beamforming
<b>Ports</b>	Wi-Fi channel: 2.4GHz :2.4G~2.4835GHz 5GHz : 5.150~5.250GHz, 5.725~5.850GHz(Country Specific)
	1 10/100/1000M WAN port (Auto MDI/MDIX)
	3 10/100M LAN ports (Auto MDI/MDIX)
	1 system LED indicator, 3 network port LED indicators, 1 Wi-Fi indicator
	1 device pairing/factory reset button
<b>Physical specifications</b>	1 power input interface
	Dimensions: 182x121x32mm (WxDxH, excluding antennas) Weight: 0.4kg (entire equipment including packaging)
<b>Power supply</b>	Power specification: DC12V 0.6A
	Maximum power: <7W
<b>Certification</b>	CE, RoHS, FCC
<b>Operating environment</b>	Operating temperature: -10-45°C Storage temperature: -40-70°C


- Exclusive Reyee Mesh Technology Enables Zero-configuration Networking for Multi




- Wi-Fi Acceleration Button Put You One Step Ahead of Other Players



# RG-EW1200

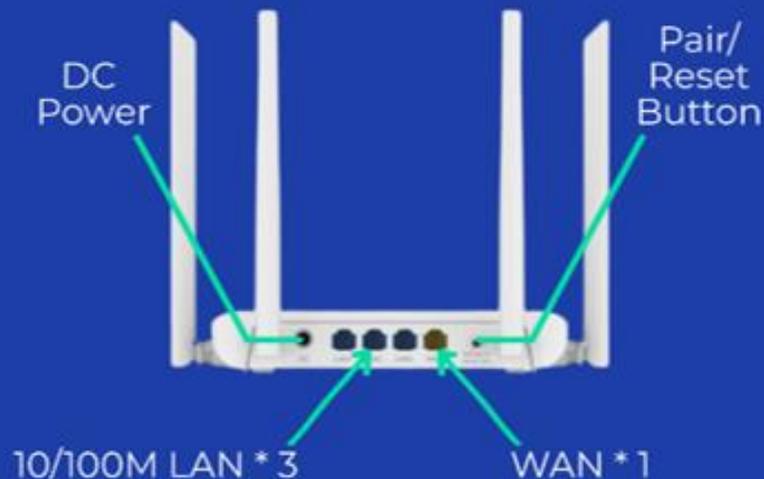

- 1167M Dual-Band Integration Offering Low Interference and Fast Internet Speed

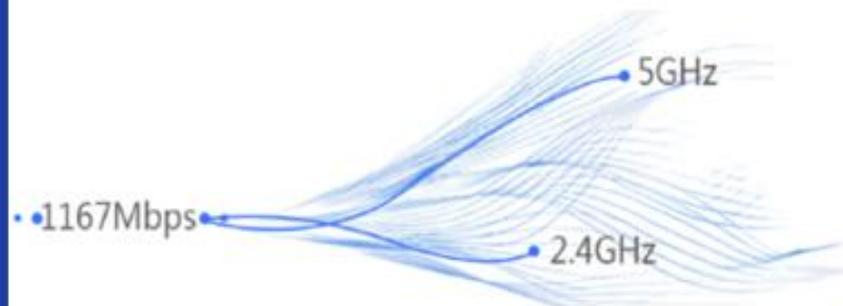


- Reyee Mesh Technology Offers Seamless Roaming without Disconnection





Ruijie Cloud

# Cloud Managed Switch Put Network Into Your Phone

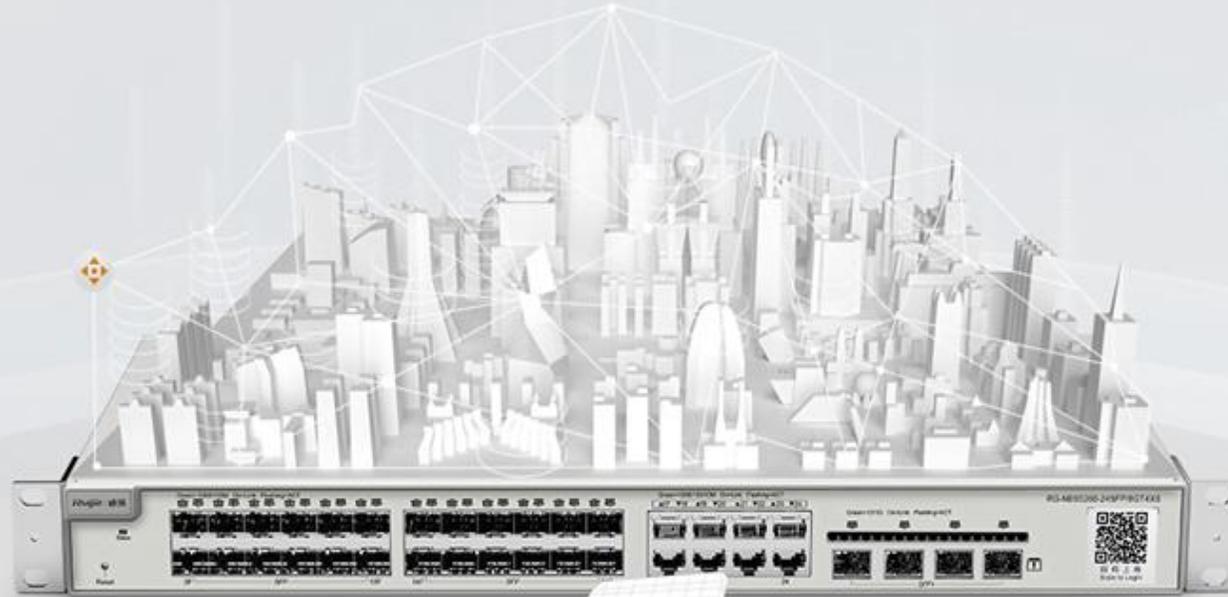

Self-Organized  
Network



NVR/Camera  
Recognition



Configure VLAN  
By Mobile Phone



Monitoring  
by Mobile




Real-Time  
Alarm



Port Reboot  
Remotely

## VLAN Configuration on Mobile Phones, Visualized Configuration Experience

Breaking new ground with easy operation experience on mobile phones

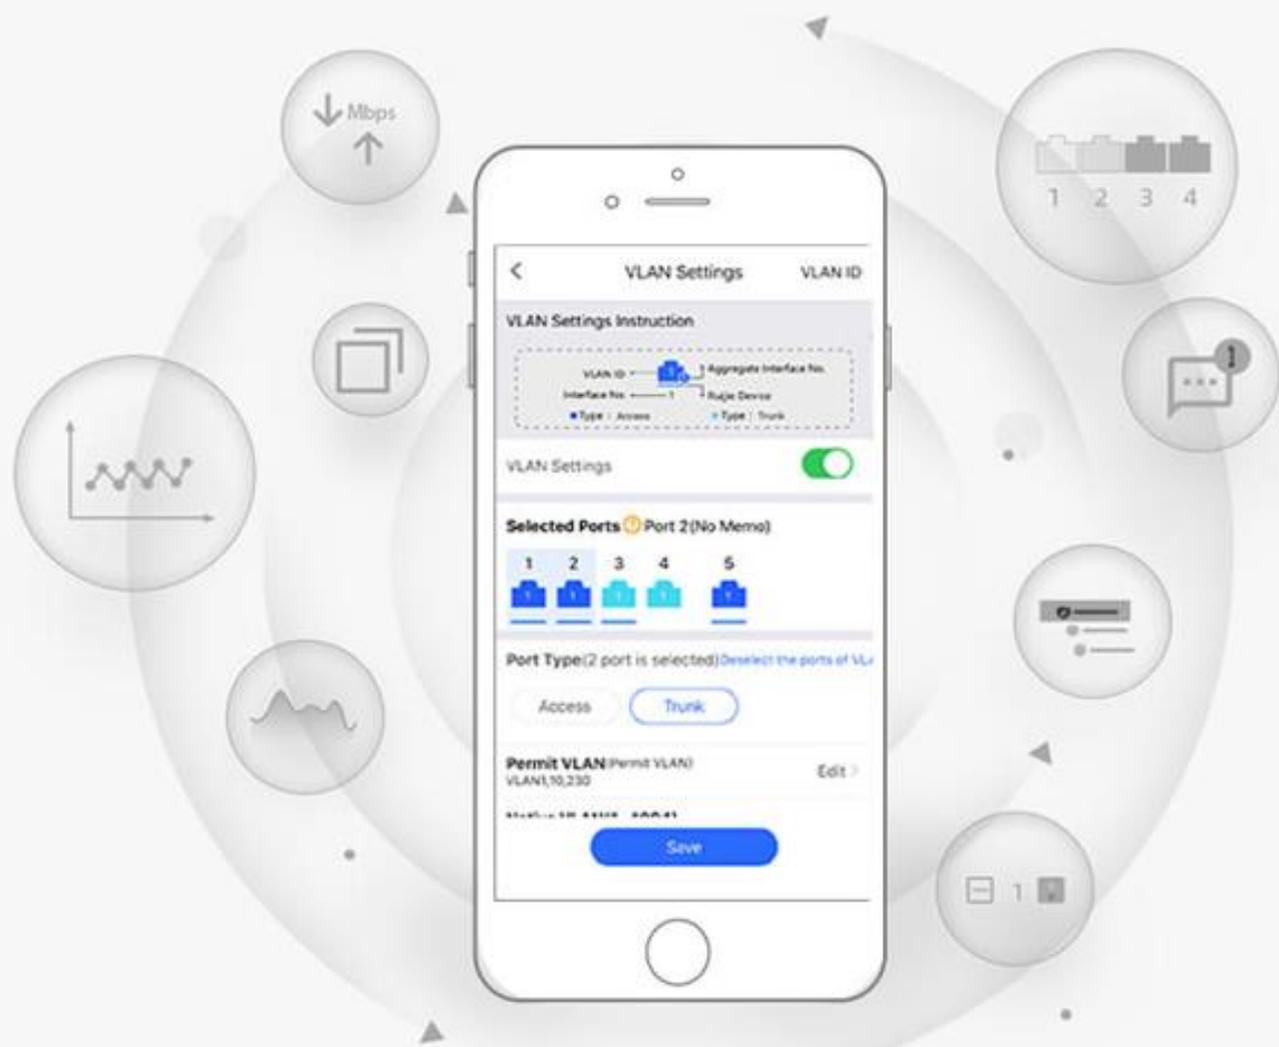



Self-organizing Network



NVR/Camera Recognition



VLAN Configuration by Mobile




Real Time Monitoring



Failure Alarm



Port Reboot Remotely

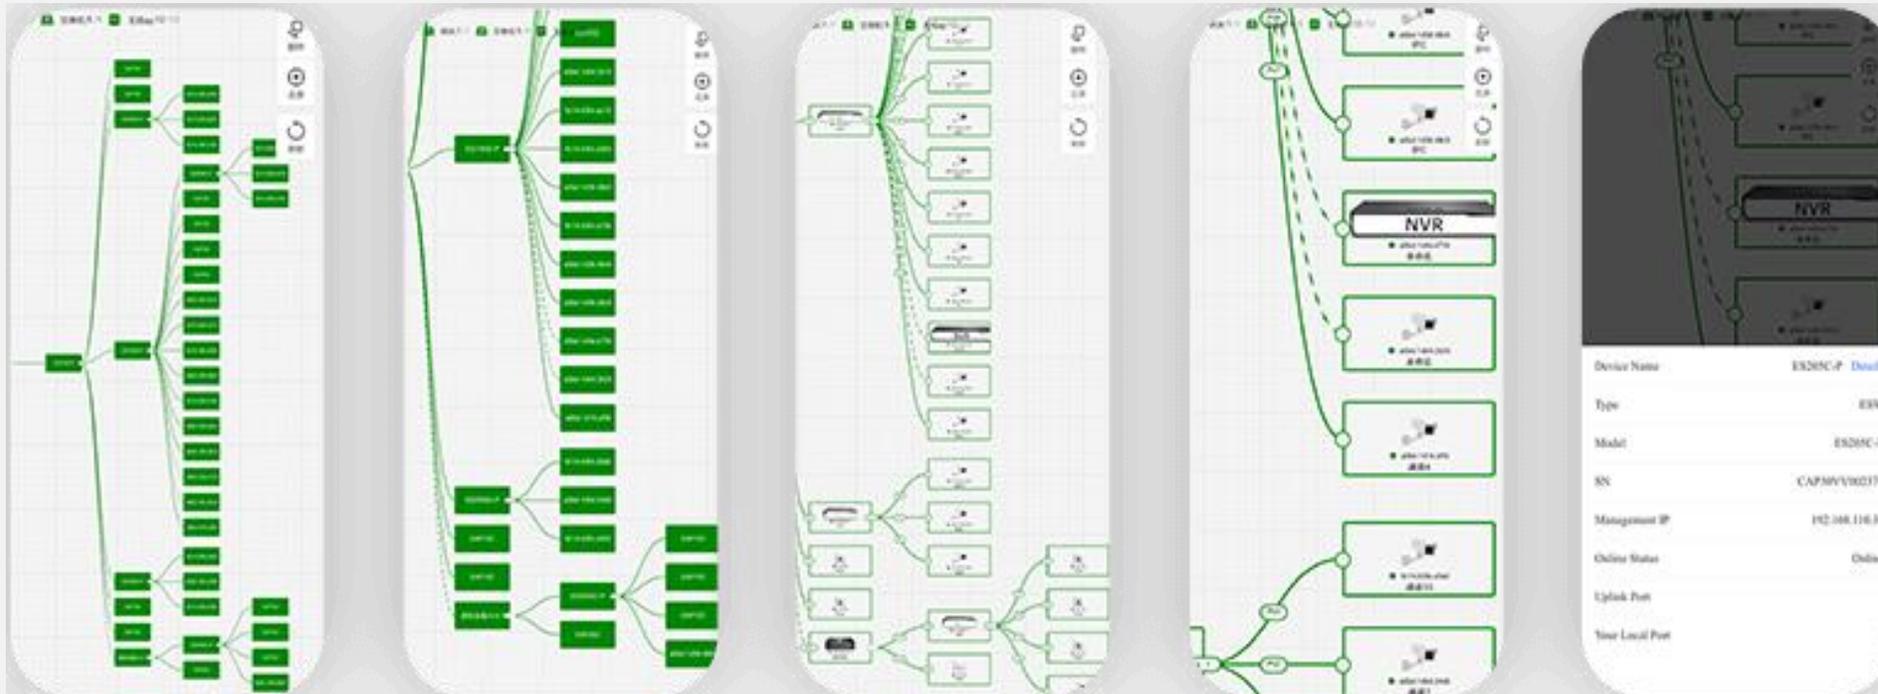

It's a switch that can recognize cameras  
Also a topology with cameras and NVRs, routers.





Traffic Rate



Flow Trend





POE Status

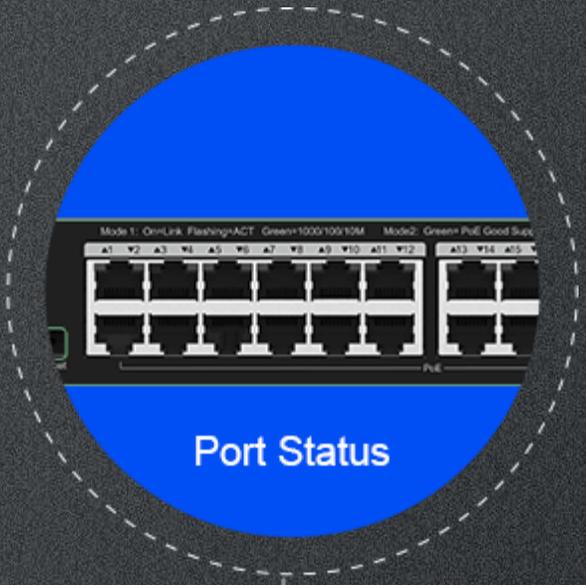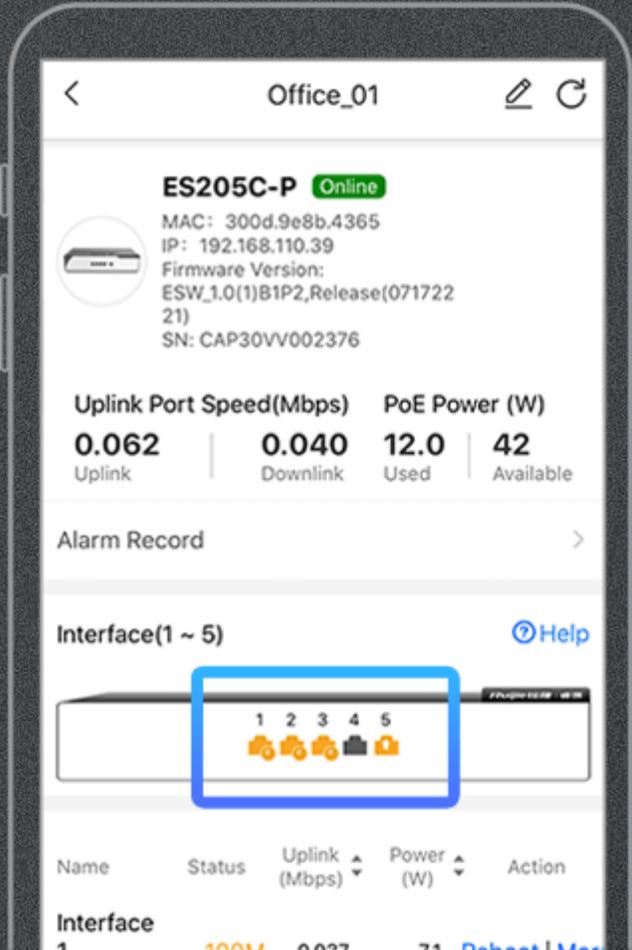

# Port Status At-a-glance On Your Mobile Phone

Offering You a Clear Perspective

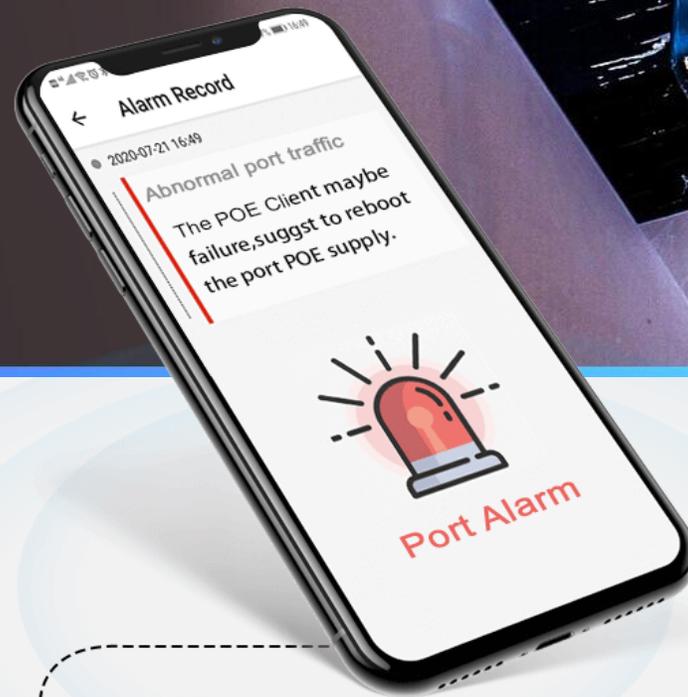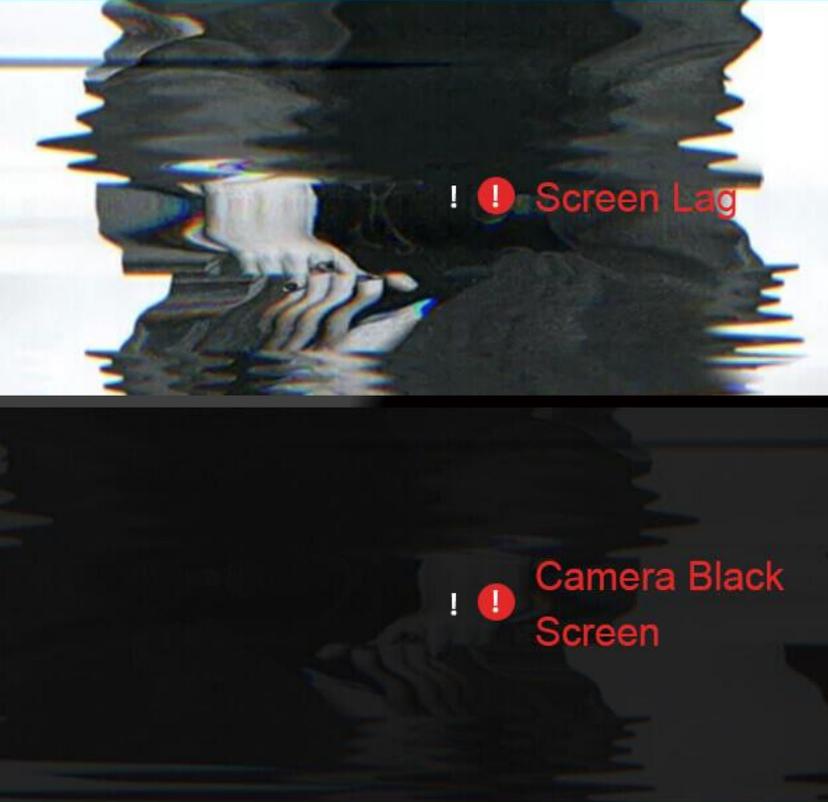


Various real-time alarm,  
Newbie can also do  
troubleshooting.




# Failure Alarm and Fault Positioning

Quick Response — Excellent Troubleshooting Assistant

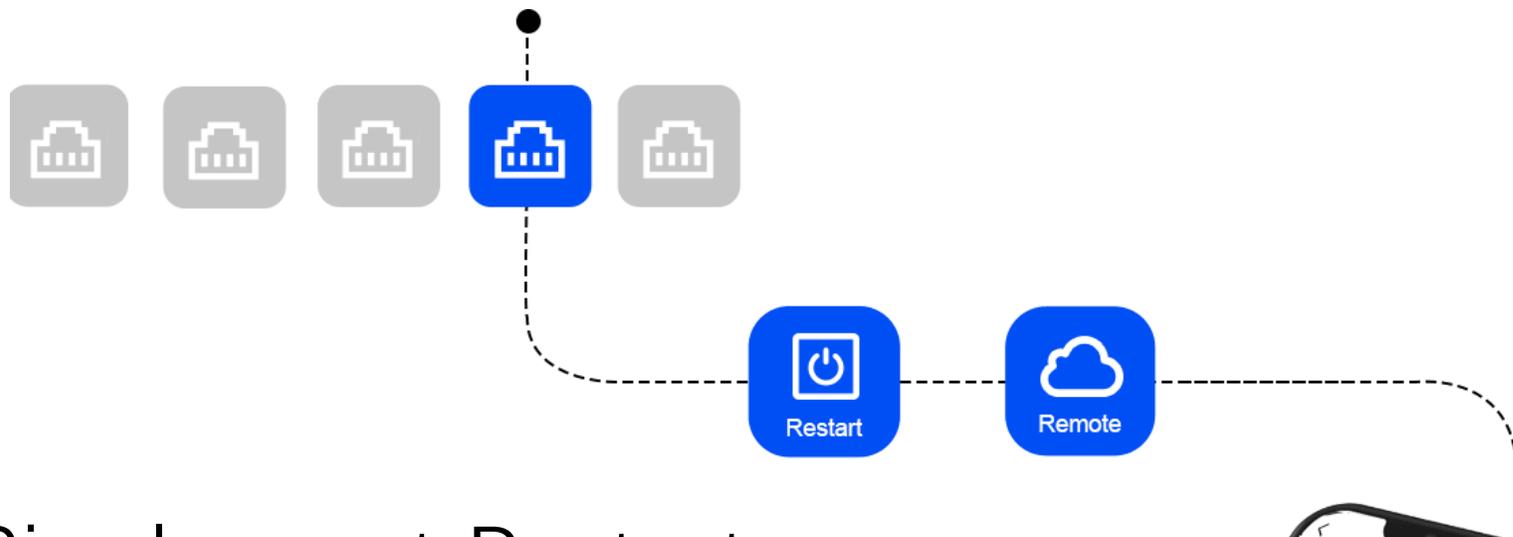


## Remote Single-port Restart

Port restart is a better solution than equipment restart.  
Single-port restart is a better solution than restarting all the ports. Remote single-port restart is even better than on-site single-port restart.

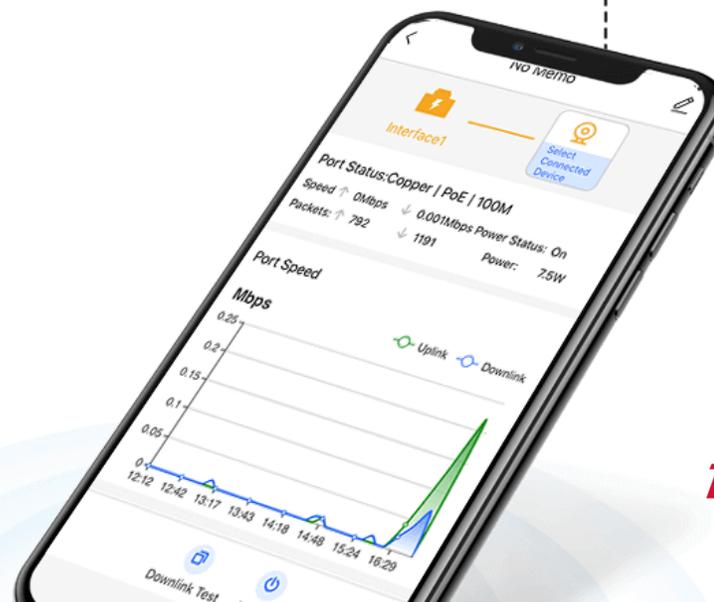

# Auto Equipment Discovery Supporting Hybrid and Easy Deployment

- All switches can be deployed after scanning the QR code by the mobile phone.
- Hybrid deployment with routers and APs are supported

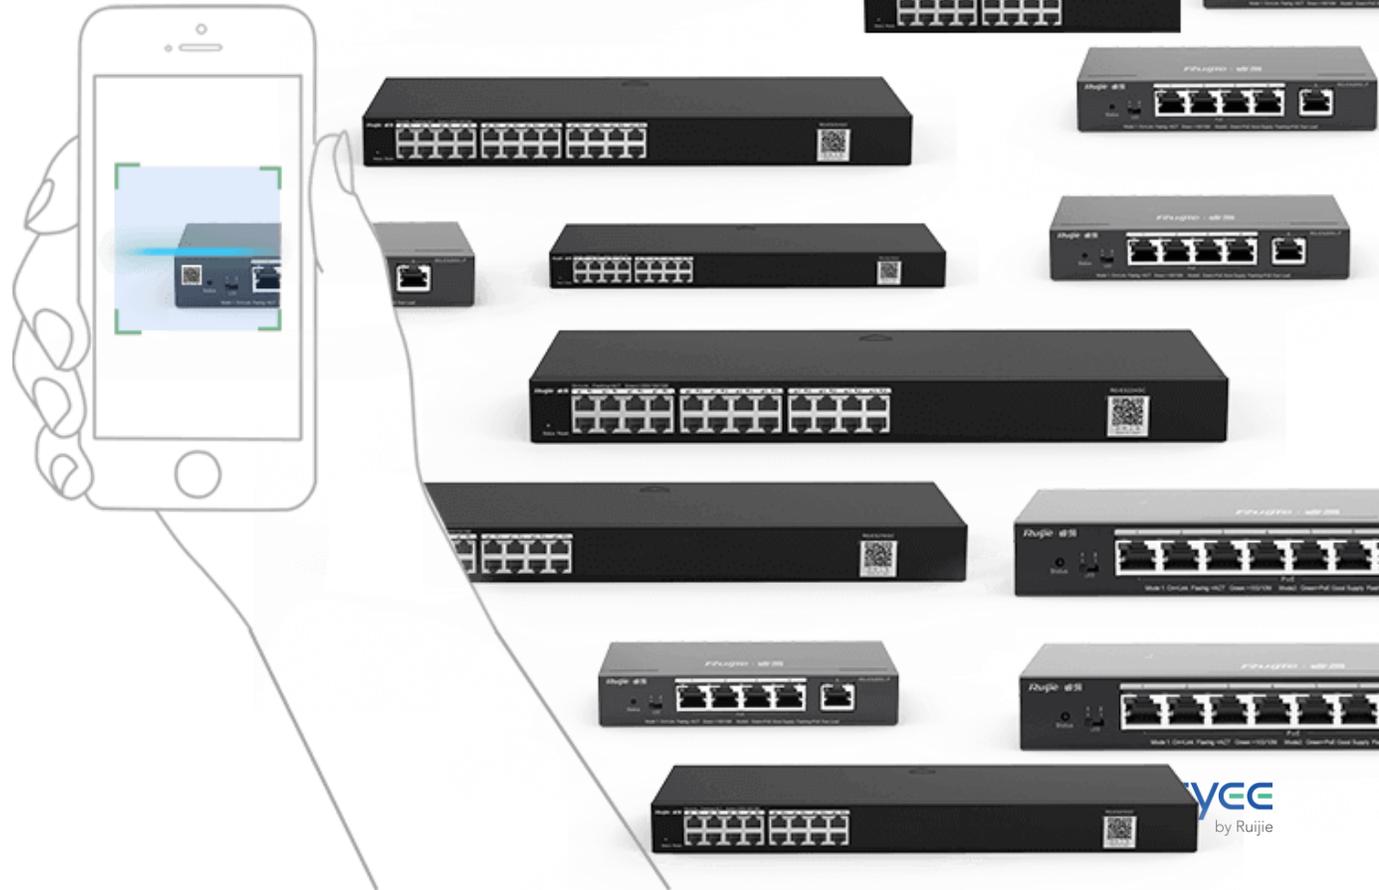



# Reyee Self Organizing Network

- ✓ Fast setup < 5 mins for upto devices
- ✓ 100% Free Cloud controller
- ✓ No expert engineer is required
- ✓ Done by mobile APP

Now you will have more time to get more opportunity !



# Real Topology Monitoring

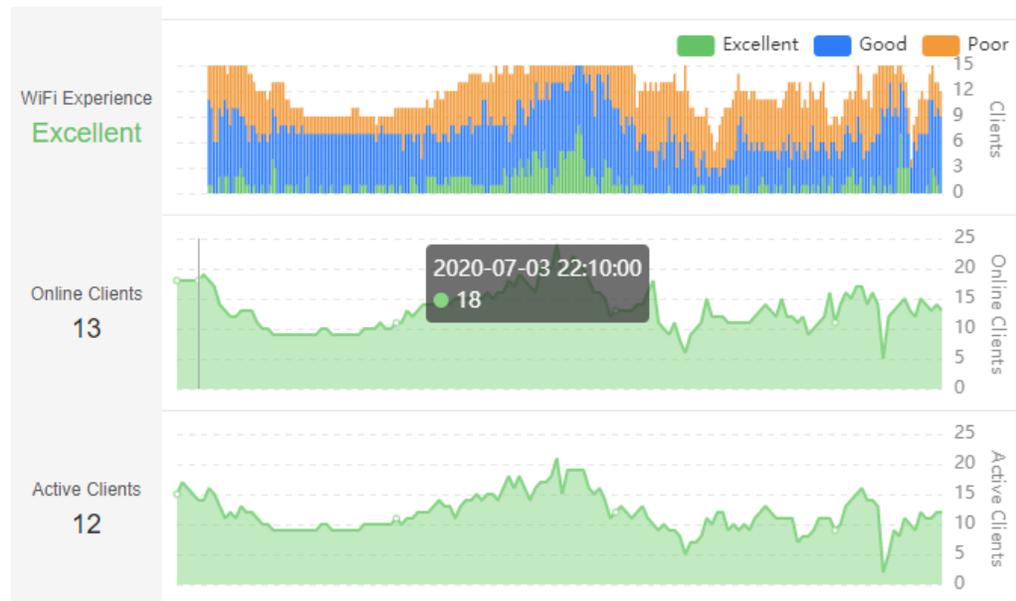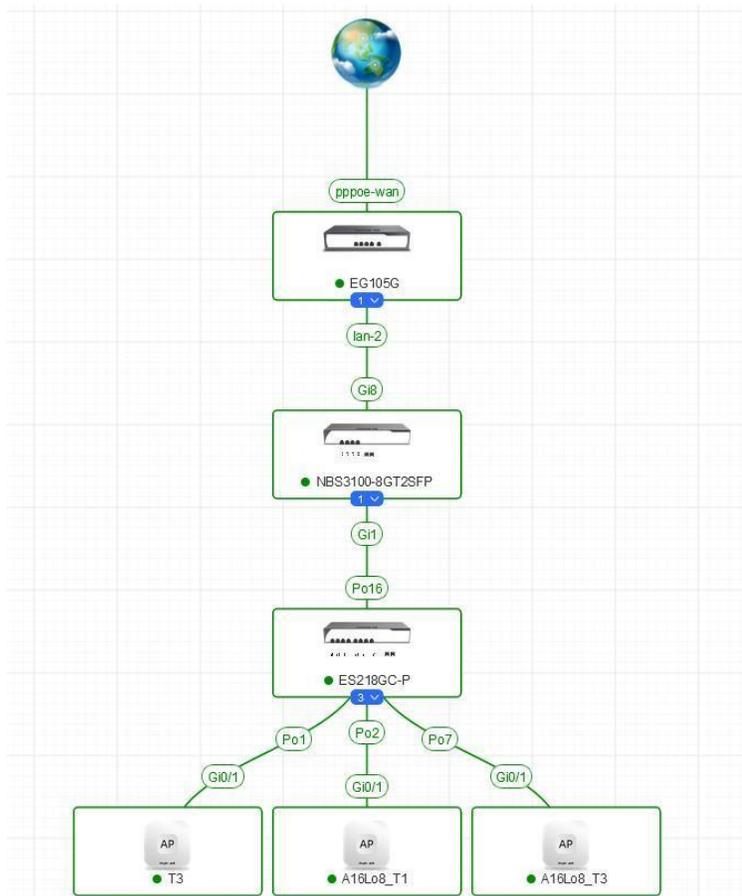

- FREE !
- Automatic generated
- Do monitoring everywhere anywhere with much
- With some details graphs and port information

# Professional Delivery Report

- Help small SI to prepare project report with less time
- Anytime generate and share the network reports
- Improve customer satisfaction

## StaffAccommodation Project Report


No.	Type	Model	Description	Quantity
1	SWITCH	XS-S1920-26GT2SFP-P-E		3
2	GATEWAY	EG3250		1
3	AP	AP710		55
4	AP	RG-AP630(CD)		1

### 3.2 Device Information (excluding APs)

No.	Alias	SN	Model	MAC	IP
1	SFSW	G1NT8JY00116A	XS-S1920-26GT2SFP-P-E	8005.88b0.770c	172.16.100.24
2	GFSW	G1NT8JY001246	XS-S1920-26GT2SFP-P-E	8005.88b0.771c	172.16.100.23
3	FFSW	G1NT8JY001250	XS-S1920-26GT2SFP-P-E	8005.88b0.771e	172.16.100.22
4	TENCATE_EG	H1NA0T5000719	EG3250	8005.88d4.60e5	83.110.237.210

## 4 Topology

### 4.1 Network Topology



### 4.2 Uplink/Downlink Device

#### 4.2.1 Uplink/Downlink Devices of TENCATE\_EG

## StaffAccommodation Project Report

Downlink Port	Management IP	Alias	SN	Model
Gi0/1	172.16.100.23	GFSW	G1NT8JY001246	XS-S1920-26GT2SFP-P-E

### 4.2.2 Uplink/Downlink Devices of GFSW

Downlink Port	Management IP	Alias	SN	Model
Gi0/1	172.16.64.78	AP_G_ERM	G1NT9Y7022862	AP710
Gi0/2	172.16.64.76	AP_G_MRM	G1NTAKQ006472	AP710
Gi0/3	172.16.64.85	AP_G01	G1NT9Y7022529	AP710
Gi0/4	172.16.64.71	AP_G05	G1NT9Y7021904	AP710
Gi0/5	172.16.64.77	AP_G18	G1NT9Y702237B	AP710
Gi0/6	172.16.64.75	AP_G11	G1NT9Y7022837	AP710
Gi0/7	172.16.64.84	AP_G09	G1NT9Y7022744	AP710
Gi0/8	172.16.64.91	AP_G14	G1NTAKQ00254A	AP710

## StaffAccommodation Project Report

Downlink Port	Management IP	Alias	SN	Model
Gi0/26	172.16.100.24	SFSW	G1NT8JY00116A	XS-S1920-26GT2SFP-P-E

### 4.2.4 Uplink/Downlink Devices of SFSW

Downlink Port	Management IP	Alias	SN	Model
Gi0/26	172.16.100.24	SFSW	G1NT8JY00116A	XS-S1920-26GT2SFP-P-E

Output Report Example

# Mobile BoM Builder

- ✓ Fixed BoM Example for common Scenarios
- ✓ Build Customed BOM within 3 mins
- ✓ Export to editable excel file
- ✓ One-click sharing via **WhatsApp and Gmail**



### Fixed common BoM example

出方案

**Product**

-  **RG-EG205G**
  - Dual WAN ports
  - Support IP allocation, speed limit etc
  - Support access control and authentication
-  **RG-EAP201**
  - Delicate design suitable for office
  - Easy installation by ceiling, mounting etc
  - Clients: 20
-  **RG-EAP202**
  - 1GE and dual band: high performance network for high-density scenario
  - Easy Networking: APs can set up networks without AC
  - App Management

**Scheme Option**

Staff	<=100 people (100M)	>100 people (200M)
Gateway	RG-EG105G	RG-EG205G
AP	RG-EAP201 5pcs	RG-EAP202 5pcs

### Customized BoM Builder

Please enter the requirements

Open office

Room Number: - 1 +

Max users per room: - 40 +

LAN ports per room: - 10 +

Choose AP: Indoor

Meeting room

Room Number: - 1 +

Max users per room: - 20 +

LAN ports per room: - 1 +



Choose AP: Indoor

# Project Sharing

- Easiest way to share projects with others
- Support different access level for different user
- Can help MSP/SI to get more chance to sell aftersales support services




# PoE Calculator

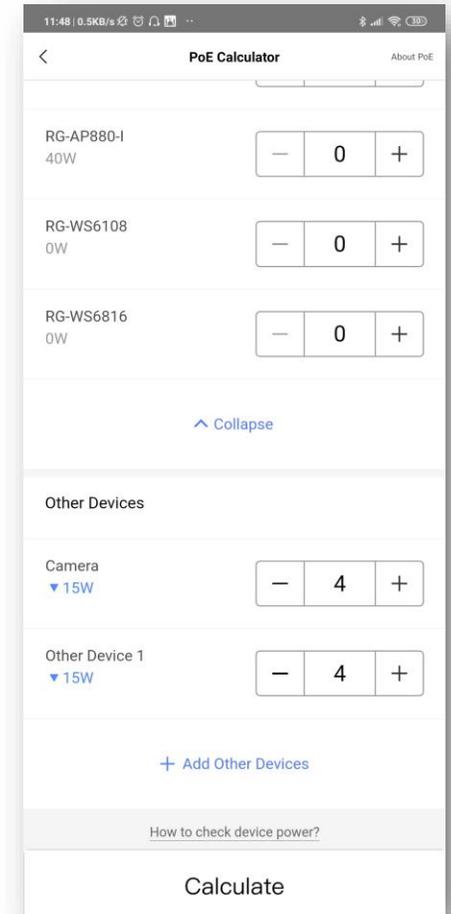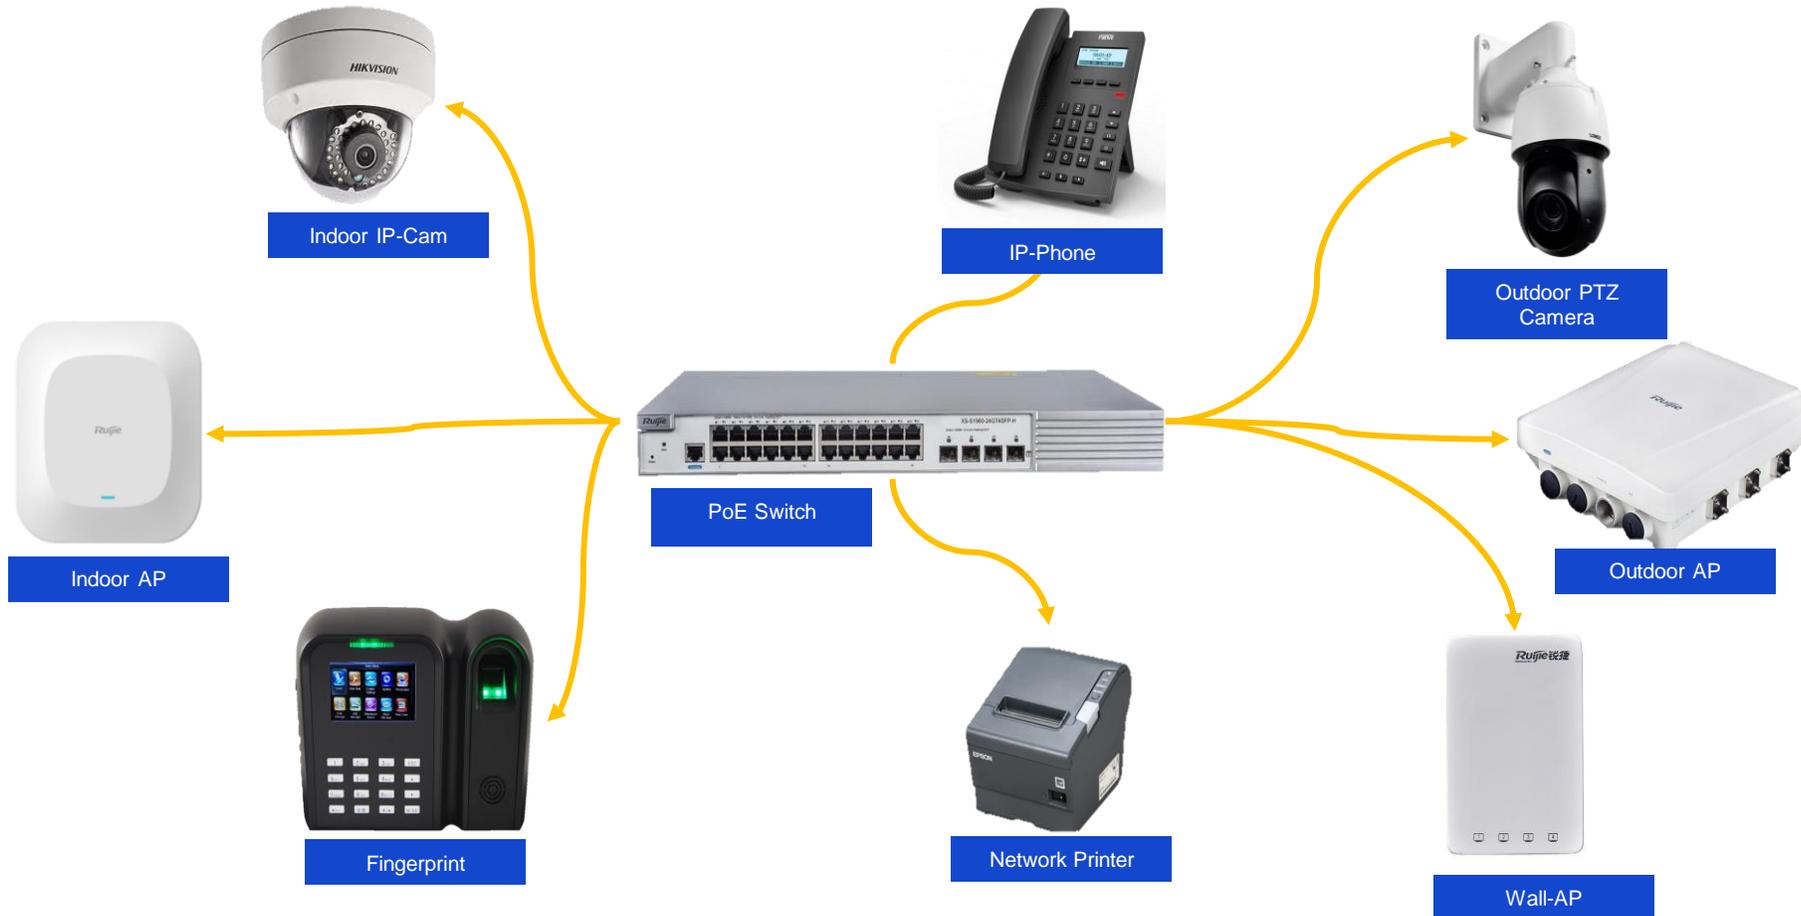

How much Watts their PoE Input ?  
Suitable switch model to powering them all up?

# Cloud Make Your Business Easy

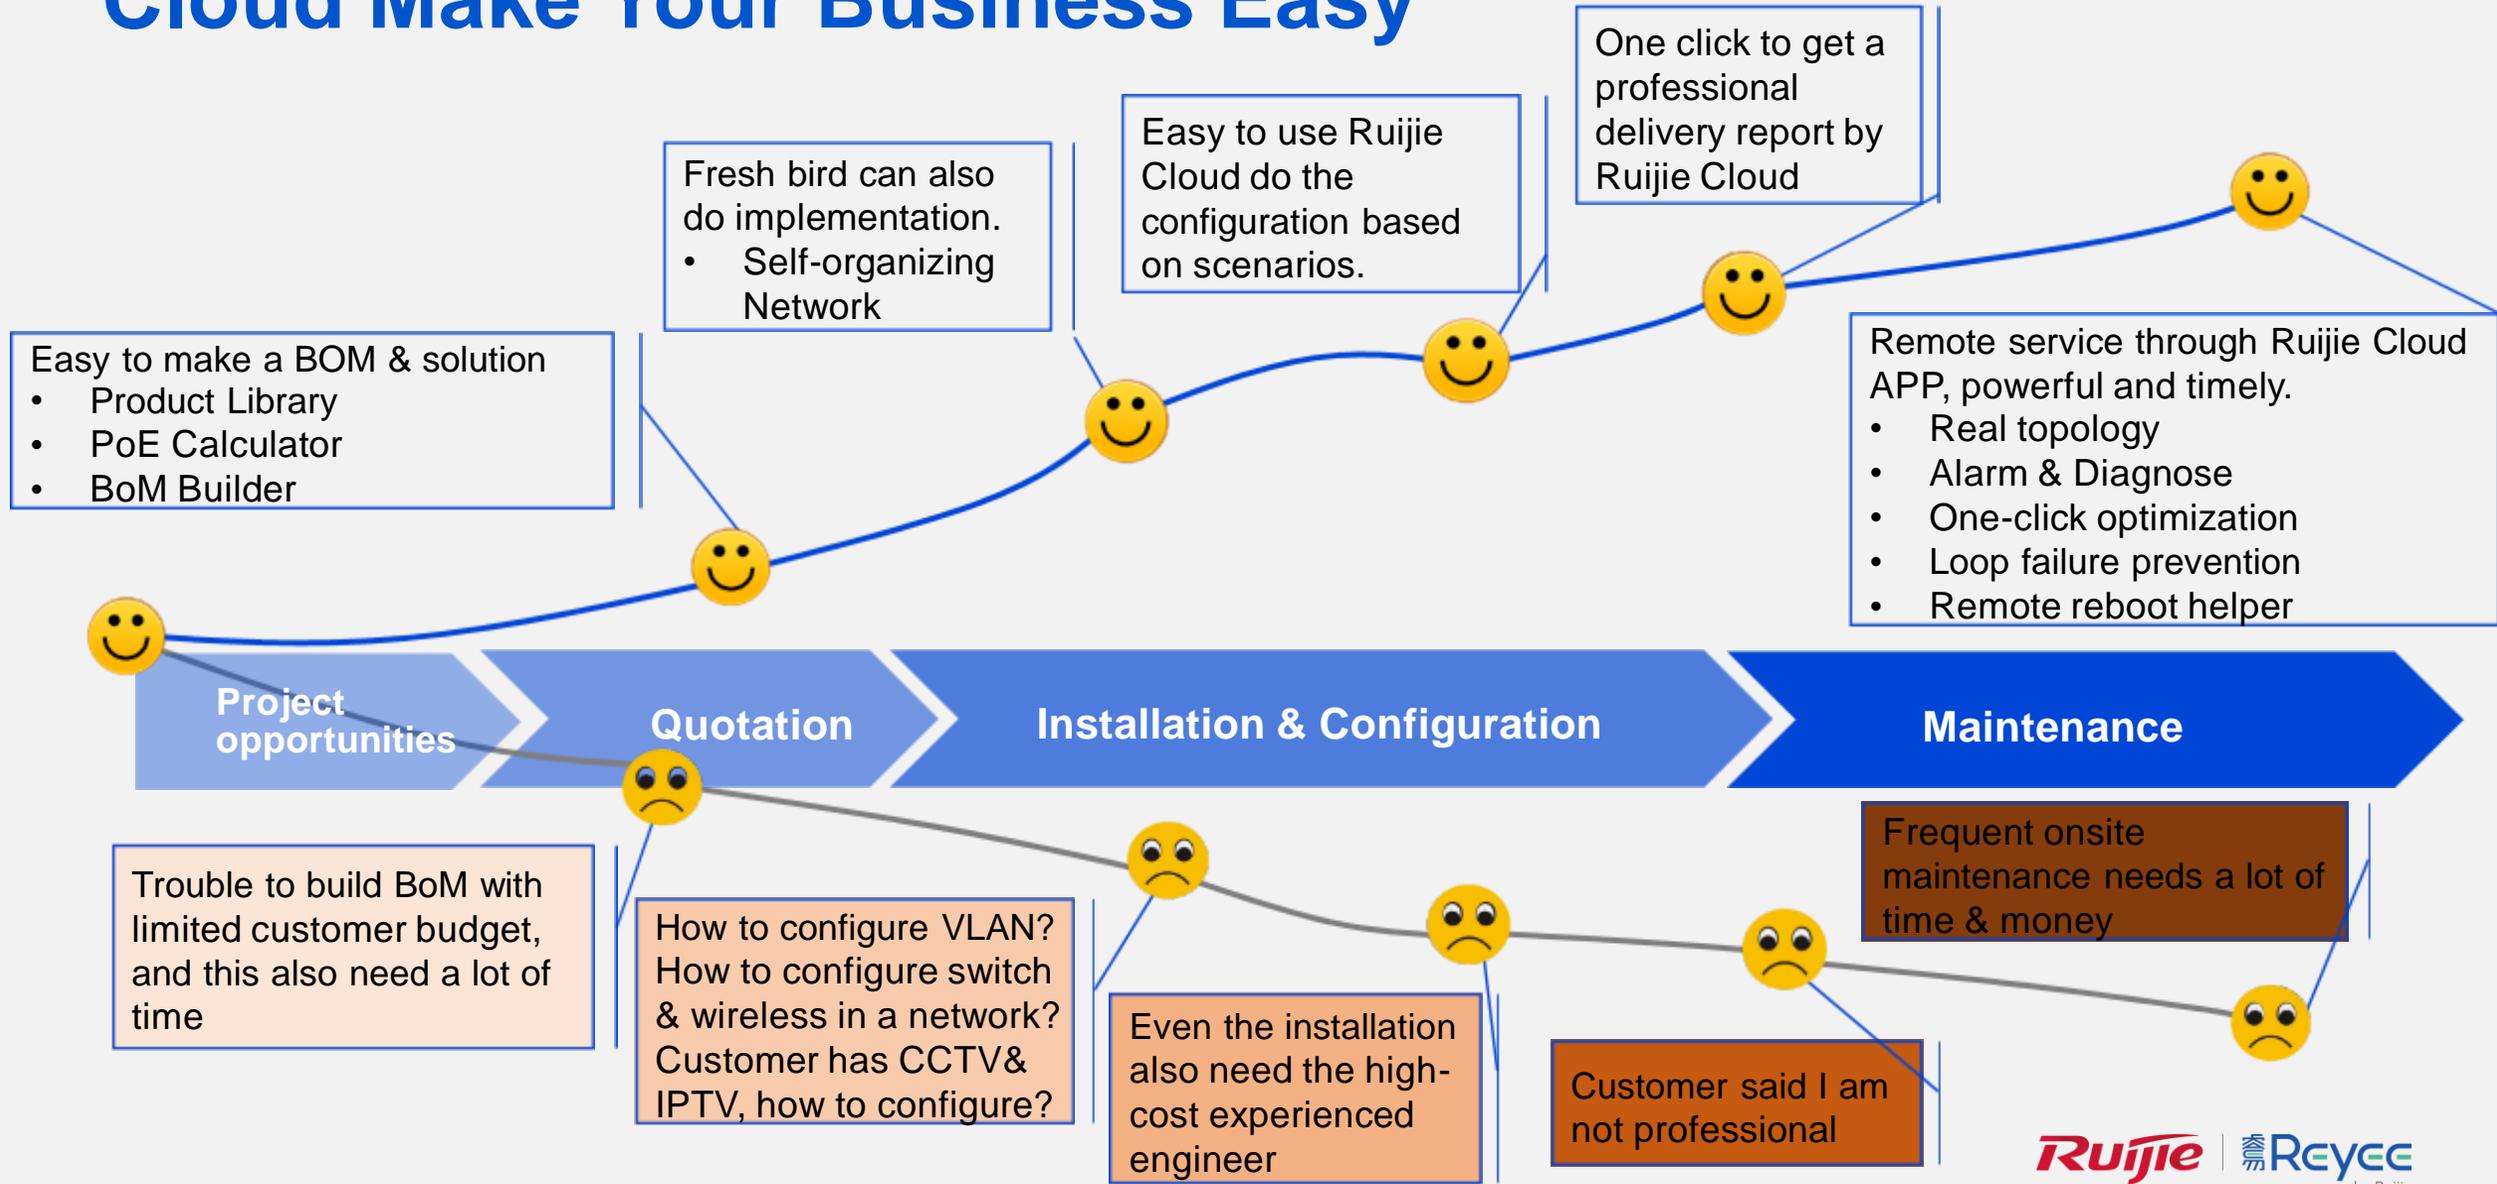

# Make Your Business Easy



Better service



More projects  
Bigger projects




Less manpower  
investment



**Put Network  
Into Your Phone**

**Redefine your easy network**

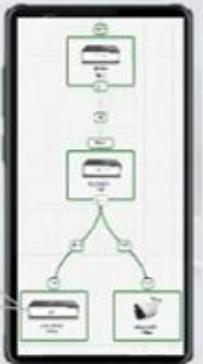

**Configure VLAN  
By Mobile Phone**




**Reboot Remotely**



**Real-Time Alarm**

# Differentiation between Enterprise & Reyece

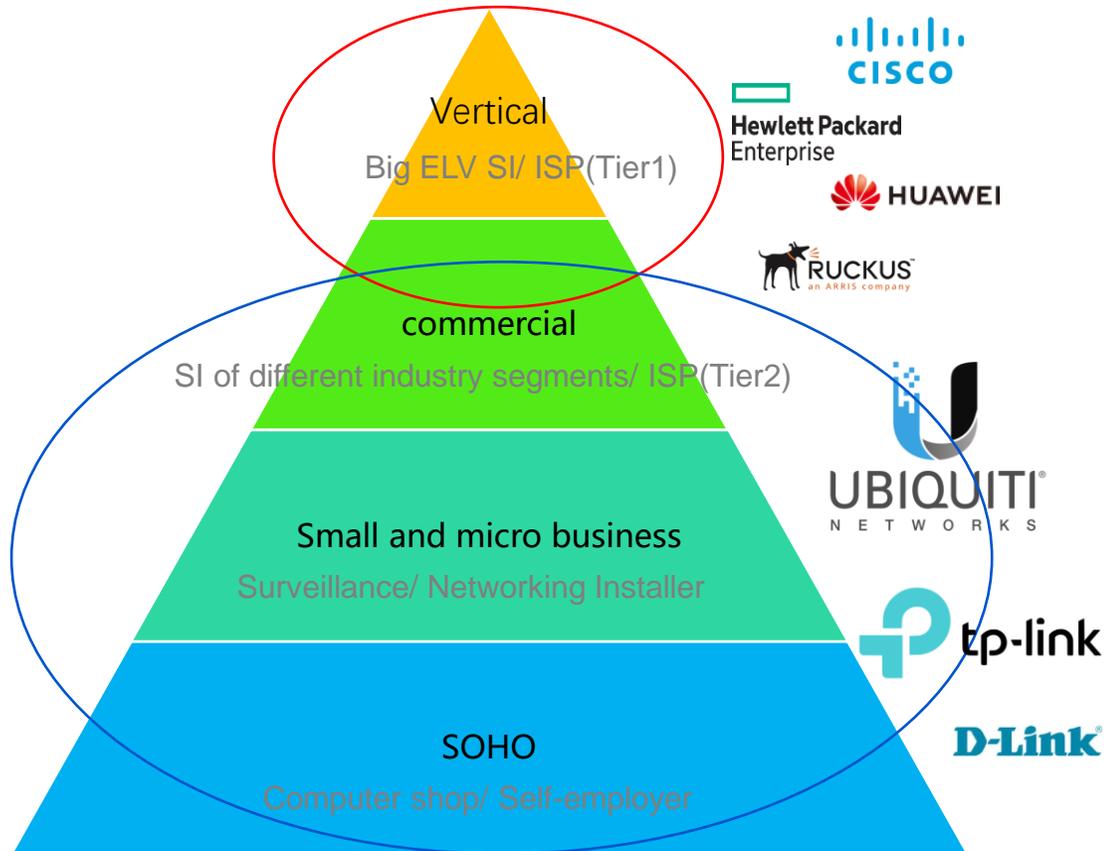


- Higher Performance
- Rich Enterprise Features
- Enterprise Cloud Features
- Competitive Price with Enterprise Brand



- Good performance
- Sufficient practical features
- Self-organizing Network
- Attractive Price with higher cost performance

# Maybe the vender with most comprehensive product lines

Data Center

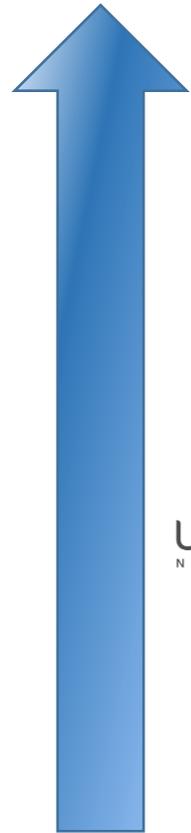

Hewlett Packard  
Enterprise



SOHO



## Switch

Innovative Switches with 20 Years Experience



Enterprise models: 35  
Reyee models: 29



## Wireless

Ruijie WiFi, More Than Fast



Enterprise models: 18  
Reyee models: 9



## Gateway

Easy Gateway Empowered by Cloud



Enterprise models: 4  
Reyee models: 4

# THANKS

**Ruijie Networks Co., Ltd.**

For more information about Ruijie products, please visit

[www.ruijienetworks.com](http://www.ruijienetworks.com)