

RevNo.	Revision note	Date	Signature	Checked

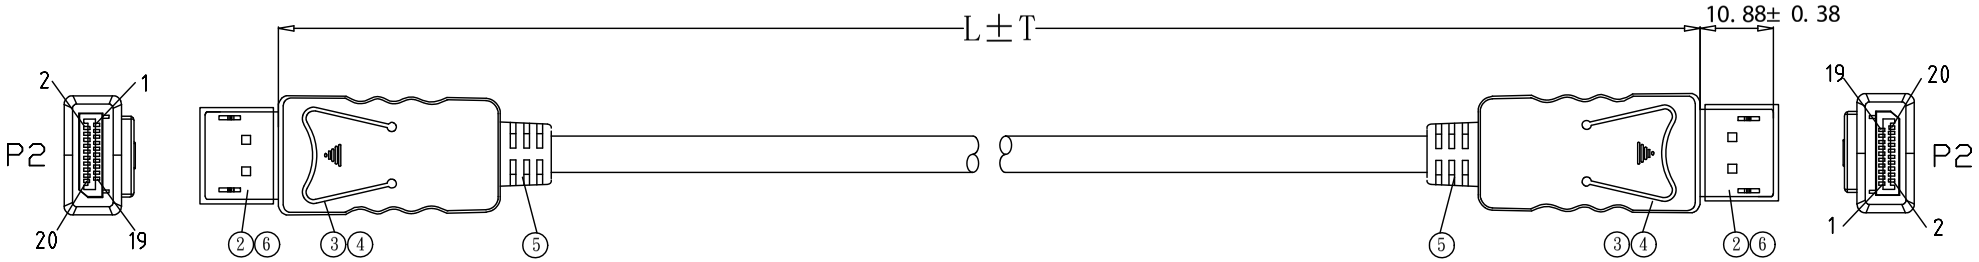

P/N	L/(mm)	T/(mm)	RESOLUTION
BC-DSP-DP-MM-10-UHD60	10000	300	4K*2K@60Hz

PIN OUT

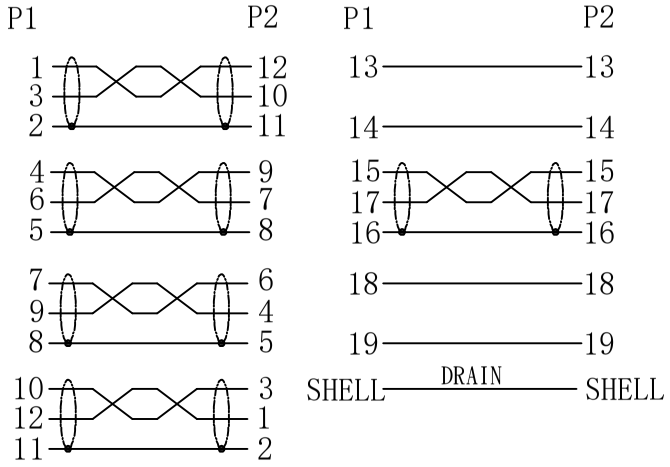

NOTES:

1. OPEN/SHORT/INTERMITTENCE:100%.
2. INSULATION RESISTANCE:DC 300V 0.01S 10MΩMin
3. CONDUCTIVE RESISTANCE:10Ω Max
4. RoHS & REACH COMPLIANT

NO.	MATERIAL	DESCRIPTION	QTY.	UNIT
⑥	DUST CAP	DP MALE DUST CAP	2	PCS
⑤	MOLDED	45P BLACK PVC		G
④	MOLDED	LDPE		G
③	PLASTIC HOOD	DP MALE BLACK PLASTIC HOOD	2	SET
②	CONNECTOR	DP 20PIN MALE,GOLD PLATED PIN,BLACK INSULATION,GOLD PLATED SHELL	2	PCS
①	CABLE	(7/0.127TC*1P+D+FAM)*5+7/0.127TC*4C+ADB PVC/BLACK JACKET OD:7.3±0.2mm MARKING: DisplayPort Cable E****** 兄 AWM STYLE 20276 80℃ 30V VW-1	L	MM

Ltemref	Quantity	Title/Name, designation, material, dimension etc	Article NO./Reference
Designed by FLY	Checkde by HELEN	Approved by - date 2023.01.17	File name	Date 2023.01.17	Scale FREE
ANGLE:		beek	BC-DSP-DP-MM-10-UHD60	
UNIT:MM			Edition 1	Sheet 1/1