

ASSMANN

The World of Cables

Novelties 2010-I



delivery of stock goods in 24 hours



certified quality



13 own branches worldwide - global sourcing - local serving



all services are online available



since 39 years original ASSMANN quality



complete assortment and strong brands

NOVELTIES

Article Overview - USB 3.0 cable (page 2-5)

On the basis of the USB 3.0 cables we give you an overview of the cable groups in the latest Assmann cable catalog.

Description	Classification:	Basic	Classic	Premium
	Version:	USB 3.0	USB 3.0	USB 3.0
	USB Standard:	Compatible	Conform	Conform
Features	UL-conform:	Yes	Yes	Yes
	Housing:	Molded	Molded	2-color Mold
	Connector:	Nickel plated	Nickel plated	Nickel plated
	Cable shielding:	Double shielded	Double shielded	Double shielded
USB connection cable		-	•	•
USB extensionkabel		-	•	•

USB 3.0 connection cable, A to A



- Connector 1 USB A, plug
- Connector 2 USB A, plug
- USB compliance USB 3.0
- Hoods molded
- Cable type 9-wire
- Shielding double shielding
- AWG 28
- UL 2725
- Connector nickel-plated
- Color cable black
- Color connector black
- Packaging Polybag

272441 / AK-112310

1.0 m

272458 / AK-112311

1.8 m

272496 / AK-112312

3.0 m

272519 / AK-112313

5.0 m

DIGITUS® USB 3.0 connection cable, A to A, Premium



- Connector 1 USB A, plug
- Connector 2 USB A, plug
- USB compliance USB 3.0
- Hoods molded
- Cable type 9-wire
- Shielding double shielding
- AWG 28
- UL 2725
- Connector nickel-plated
- Color cable black
- Color connector black/grey
- Packaging DIGITUS® Polybag



272434 / DK-112310

1.0 m in DIGITUS® Polybag

272465 / DK-112311

1.8 m in DIGITUS® Polybag

272502 / DK-112312

3.0 m in DIGITUS® Polybag

272533 / DK-112313

5.0 m in DIGITUS® Polybag

DIGITUS® Blister USB 3.0 connection cable, A to A, premium



- Connector 1 USB A, plug
- Connector 2 USB A, plug
- USB compliance USB 3.0
- Hoods molded
- Cable type 9-wire
- Shielding double shielding
- AWG 28
- UL 2725
- Connector nickel-plated
- Color cable black
- Color connector black/grey
- Packaging DIGITUS® Blister



272816 / DB-272434

1.0 m

272823 / DB-272465

1.8 m

272830 / DB-272502

3.0 m

272847 / DB-272533

5.0 m

USB 3.0 connection cable, A to B



- Connector 1 USB A, plug
- Connector 2 USB B, plug
- USB compliance USB 3.0
- Hoods molded
- Cable type 9-wire
- Shielding double shielding
- AWG 28
- UL 2725
- Connector nickel-plated
- Color cable black
- Color connector black
- Packaging Polybag

272359 / AK-112300

1.0 m

272373 / AK-112301

1.8 m

272397 / AK-112302

3.0 m

272410 / AK-112303

5.0 m

DIGITUS® USB 3.0 connection cable, A to B, premium



- Connector 1 USB A, plug
- Connector 2 USB B, plug
- USB compliance USB 3.0
- Hoods molded
- Cable type 9-wire
- Shielding double shielding
- AWG 28
- UL 2725
- Connector nickel-plated
- Color cable black
- Color connector black/grey
- Packaging DIGITUS® Polybag



272366 / DK-112300

1.0 m in DIGITUS® Polybag

272380 / DK-112301

1.8 m in DIGITUS® Polybag

272403 / DK-112302

3.0 m in DIGITUS® Polybag

272427 / DK-112303

5.0 m in DIGITUS® Polybag

DIGITUS® Blister USB 3.0 connection cable, A to B, premium



- Connector 1 USB A, plug
- Connector 2 USB B, plug
- USB compliance USB 3.0
- Hoods molded
- Cable type 9-wire
- Shielding double shielding
- AWG 28
- UL 2725
- Connector nickel-plated
- Color cable black
- Color connector black/grey
- Packaging DIGITUS® Blister



272748 / DB-272366

1.0 m

272755 / DB-272380

1.8 m

272762 / DB-272403

3.0 m

272779 / DB-272427

5.0 m

USB 3.0 Cables

USB 3.0 connection cable, B to B



- Connector 1 USB B, plug
- Connector 2 USB B, plug
- Hoods molded
- Cable type 9-wire
- Shielding double shielding
- AWG 28
- USB compliance USB 3.0
- UL 2725
- Connector nickel-plated
- Color cable black
- Color connector black
- Packaging Polybag

272540 / AK-112320

1.0 m

272557 / AK-112321

1.8 m

DIGITUS® USB 3.0 connection cable, B to B, premium



- Connector 1 USB B, plug
- Connector 2 USB B, plug
- USB compliance USB 3.0
- Hoods molded
- Cable type 9-wire
- Shielding double shielding
- AWG 28
- UL 2725
- Connector nickel-plated
- Color cable black
- Color connector black/grey
- Packaging DIGITUS® Polybag



272656 / DK-112320

1.0 m in DIGITUS® Polybag

272663 / DK-112321

1.8 m in DIGITUS® Polybag

DIGITUS® Blister USB 3.0 connection cable, B to B, premium



- Connector 1 USB B, plug
- Connector 2 USB B, plug
- USB compliance USB 3.0
- Hoods molded
- Cable type 9-wire
- Shielding double shielding
- AWG 28
- UL 2725
- Connector nickel-plated
- Color cable black
- Color connector black/grey
- Packaging DIGITUS® Blister



272854 / DB-272656

1.0 m

272861 / DB-272663

1.8 m

USB 3.0 connection cable, A to B Micro



- Connector 1 USB A, plug
- Connector 2 Micro USB B, plug
- USB compliance USB 3.0
- Hoods molded
- Cable type 9-wire
- Shielding double shielding
- AWG 28
- UL 2725
- Connector nickel-plated
- Color cable black
- Color connector black
- Packaging Polybag

272595 / AK-112340

1.0 m

272601 / AK-112341

2.0 m

272618 / AK-112342

3.0 m

272625 / AK-112343

5.0 m

DIGITUS® USB 3.0 connection cable, A to B Micro, premium



- Connector 1 USB A, plug
- Connector 2 Micro USB B, plug
- USB compliance USB 3.0
- Hoods molded
- Cable type 9-wire
- Shielding double shielding
- AWG 28
- UL 2725
- Connector nickel-plated
- Color cable black
- Color connector black/grey
- Packaging DIGITUS® Polybag



272700 / DK-112340

1.0 m in DIGITUS® Polybag

272717 / DK-112341

2.0 m in DIGITUS® Polybag

272724 / DK-112342

3.0 m in DIGITUS® Polybag

272731 / DK-112343

5.0 m in DIGITUS® Polybag

DIGITUS® Blister USB 3.0 connection cable, A to B Micro, premium



- Connector 1 USB A, plug
- Connector 2 Micro USB B, plug
- USB compliance USB 3.0
- Hoods molded
- Cable type 9-wire
- Shielding double shielding
- AWG 28
- UL 2725
- Connector nickel-plated
- Color cable black
- Color connector black/grey
- Packaging DIGITUS® Blister



272908 / DB-272700

1.0 m

272915 / DB-272717

2.0 m

272922 / DB-272724

3.0 m

272939 / DB-272731

5.0 m

USB 3.0 extension cable, A to A



- Connector 1 USB A, plug
- Connector 2 USB A, jack
- USB compliance USB 3.0
- Hoods molded
- Cable type 9-wire
- Shielding double shielding
- AWG 28
- UL 2725
- Connector nickel-plated
- Color cable black
- Color connector black
- Packaging Polybag

272564 / AK-112330

1.8 m

272571 / AK-112331

3.0 m

272588 / AK-112332

5.0 m

DIGITUS® USB 3.0 extension cable, A to A, premium



- Connector 1 USB A, plug
- Connector 2 USB A, jack
- USB compliance USB 3.0
- Hoods molded
- Cable type 9-wire
- Shielding double shielding
- AWG 28
- UL 2725
- Connector nickel-plated
- Color cable black
- Color connector black/grey
- Packaging DIGITUS® Polybag



272670 / DK-112330

1.8 m in DIGITUS® Polybag

272687 / DK-112331

3.0 m in DIGITUS® Polybag

272694 / DK-112332

5.0 m in DIGITUS® Polybag

DIGITUS® Blister USB 3.0 extension cable, A to A, premium



- Connector 1 USB A, plug
- Connector 2 USB A, jack
- USB compliance USB 3.0
- Hoods molded
- Cable type 9-wire
- Shielding double shielding
- AWG 28
- UL 2725
- Connector nickel-plated
- Color cable black
- Color connector black/grey
- Packaging DIGITUS® Blister



272878 / DB-272670

1.8 m

272885 / DB-272687

3.0 m

272892 / DB-272694

5.0 m

USB Y-connection cable, 2x A to mini B



Cable serves, for example, the connection of external USB devices (e.g. external 6,35cm / 2.5" hard disks) without an external electricity supply compelling is necessary. Power supply occurs about the USB interface of the PC.

- Connector 1 2x USB A, plug
- Connector 2 USB mini B (5-pin), plug
- USB compliance USB 2.0
- Hoods molded
- Shielding double shielding
- AWG 28
- UL 2725
- Connector nickel-plated
- Color cable black
- Color connector black / red
- Packaging Polybag

269175 / AK-112008

1,0 m

USB Y-connection cable, 2x A to B



Cable serves, for example, the connection of external USB devices without an external electricity supply compelling is necessary. Power supply occurs about the USB interface of the PC.

- Connector 1 2x USB A, plug
- Connector 2 USB B, plug
- USB compliance USB 2.0
- Hoods molded
- Shielding double shielding
- AWG 28
- UL 2725
- Connector nickel-plated
- Color cable black
- Color connector black / red
- Packaging Polybag

269168 / AK-112007






1,0 m

**ASSMANN -
The World of Cables**



HDMI Cables

HDMI Information: Specifications / Features

HDMI Version:	Standard HDMI	Standard HDMI	High Speed HDMI	Standard HDMI w/ Ethernet	High Speed HDMI w/ Ethernet
Comparable with former Rev.-No.:	≤ HDMI 1.2a	HDMI 1.3	HDMI 1.3a/b/c	HDMI 1.4	HDMI 1.4
Band Range	4,95 GBit/s, 165 MHz (plug type A); 10 GBit/s 165 MHz (plug type B)	10,2 GBit/s, 340 MHz (plug type A, type C)	10,2 GBit/s, 340 MHz (plug type A, type C)	10,2 GBit/s, 340 MHz (plug type A, type C, type D)	10,2 GBit/s, 340 MHz (plug type A, type C, type D)
Recommended resolution	720p / 1080i	720p / 1080i	1080p	720p / 1080i	≥ 1080p
Sound Types	8 PCM, Dolby Digital, DTS, MPEG, DVD-Audio, SACD	8 PCM, Dolby Digital, DTS, Dolby Digital Plus, True HD, and dts-HD	8 PCM, Dolby Digital, DTS, Dolby Digital Plus, True HD, and dts-HD	8 PCM, Dolby Digital, DTS, Dolby Digital Plus, True HD, and dts-HD	8 PCM, Dolby Digital, DTS, MPEG, DVD-Audio, SACD, Dolby Digital Plus, TrueHD and dts-HD
Color Space	24 Bit RGB/36 Bit YUV	Deep Color 30, 36 and 48 Bit RGB/ YUV, xvYCC-Color space (IEC 61966-2-4)	Deep Color 30, 36 and 48 Bit RGB/ YUV, xvYCC-Color space (IEC 61966-2-4)	24 Bit RGB/36 Bit YUV, Deep Color 30, 36 und 48 Bit RGB/ YUV, xvYCC-color space (IEC 61966-2-4), sYCC601, Adobe RGB, AdobeYCC601	24 Bit RGB/36 Bit YUV, Deep Color 30, 36 und 48 Bit RGB/ YUV, xvYCC-color space (IEC 61966-2-4), sYCC601, Adobe RGB, AdobeYCC601
Steckertypen	type A/B (type B, not common for consumer electronics) 	type A; Mini-HDMI (type C) 	type A; Mini-HDMI (type C) 	Type A; Mini-HDMI (type C); Micro-HDMI (type D) 	Type A; Mini-HDMI (type C); Micro HDMI (type D) 
Features	CEC-support; test for cable length	Lip Sync; CEC-support; test for cable length	Fehlerbereinigungen der Spezifikation 1.3	4K-resolution, 3D, HDMI Ethernet Channel, Audio Return Channel, Automotive Connection System	4K-resolution, 3D, HDMI Ethernet Channel, Audio Return Channel, Automotive Connection System

HDMI High Speed connection cable, type A, with amplifier



- Connector 1 HDMI type A, (19-pin), plug
- Connector 2 HDMI type A, (19-pin), plug
- HDMI Standard Highspeed HDMI
- Cable type CAT 2
- Hoods molded
- Shielding double shielding
- Ferrite filter none
- UL 20276
- HDTV Resolution 1440p
- Connector gold-plated
- Color cable black
- Color connector black
- Packaging Polybag

272304 / AK-108000

10,0 m

254508 / AK-108001

15,0 m

254515 / AK-108002

20,0 m

254522 / AK-108003

30,0 m

254539 / AK-108004

40,0 m

HDMI High Speed flat connection cable, type A



- Connector 1 HDMI type A, (19-pin), plug
- Connector 2 HDMI type A, (19-pin), plug
- HDMI Standard Highspeed HDMI
- Cable type CAT 2
- Hoods molded
- Shielding double shielding
- Ferrite filter none
- UL 20276
- HDTV Resolution 1440p
- Connector gold-plated
- Color cable black
- Color connector black
- Packaging Polybag

269533 / AK-108061

0,5 m

269540 / AK-108062

1,0 m

269557 / AK-108063

1,5 m

269564 / AK-108064

2,0 m


269571 / AK-108065

3,0 m

269588 / AK-108066

5,0 m

HDMI High Speed connection cable, type A, rotating

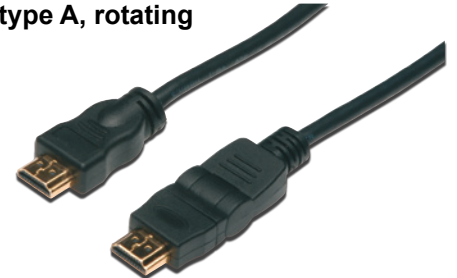

Due to the rotatable plug the cable can be used very flexible especially if wall distance is small.

- Connector 1 HDMI type A, (19-pin), plug
- Connector 2 HDMI type A, (19-pin), plug
- HDMI Standard Highspeed HDMI
- DVI cable type CAT 2
- Hoods molded
- Shielding double shielding
- UL 20276
- HDTV Resolution 1080p
- Connector gold-plated
- Color cable black
- Color connector black
- Packaging Polybag

266273 / AK-108058

2,0 m

266280 / AK-108059

3,0 m

266297 / AK-108060

5,0 m

DIGITUS® HDMI High Speed connection cable, type A, with Ethernet, premium



- Connector 1 HDMI type A, (19-pin), plug
- Connector 2 HDMI type A, (19-pin), plug
- HDMI Standard Highspeed HDMI with Ethernet
- DVI cable type CAT 2
- Hoods molded
- Shielding double shielding
- UL 20276
- HDTV Resolution 2160 p
- Connector surface gold-plated
- Color cable black
- Color connector black/grey
- Packaging DIGITUS® Blister
- HDMI Ethernet channel
- Audio return channel
- 3D over HDMI
- 4K x 2K video support (2160p)
- Additional color space



271147 / DK-108056

1,0 m in DIGITUS® Polybag

271154 / DK-108057

2,0 m in DIGITUS® Polybag

271161 / DK-108058

3,0 m in DIGITUS® Polybag

271178 / DK-108059

5,0 m in DIGITUS® Polybag

DIGITUS® Blister HDMI High Speed connection cable, type A, with Ethernet, premium



- Connector 1 HDMI type A, (19-pin), plug
- Connector 2 HDMI type A, (19-pin), plug
- HDMI Standard Highspeed HDMI with Ethernet
- DVI cable type CAT 2
- Hoods molded
- Shielding double shielding
- UL 20276
- HDTV Resolution 2160 p
- Connector surface gold-plated
- Color cable black
- Color connector black/grey
- Packaging DIGITUS® Blister
- HDMI Ethernet channel
- Audio return channel
- 3D over HDMI
- 4K x 2K video support (2160p)
- Additional color space



271185 / DB-271147

1,0 m

271208 / DB-271154

2,0 m

271215 / DB-271161

3,0 m

271222 / DB-271178

5,0 m

ASSMANN - The World of Cables



DIGITUS® Blister HDMI - DVI adapter, premium



HDMI adapter for connection of a DVI connection cables to the HDMI interface of a PC or other device with HDMI interface.

- Connector 1 HDMI type A, (19-pin), plug
- Connector 2 DVI-I, (24+5), jack
- Hoods molded
- Connector gold-plated
- Color connector black/grey
- Packaging DIGITUS® Blister



271376 / DB-271239

271239 / DK-408001

In DIGITUS® Polybag

DIGITUS® Blister HDMI - DVI adapter, premium



HDMI adapter for connection of HDMI or DVI extension cables.

- Connector 1 HDMI type A, (19-pin), plug
- Connector 2 DVI-D, (18+1), plug
- Hoods molded
- Connector gold-plated
- Color connector black/grey
- Packaging DIGITUS® Blister



271406 / DB-271246

271246 / DK-408002

In DIGITUS® Polybag

DIGITUS® Blister HDMI - DVI adapter, premium



HDMI adapter for extension of HDMI or DVI connection cables for connection to a PC or other device with HDMI or DVI interface.

- Connector 1 HDMI type A, (19-pin), jack
- Connector 2 DVI-I, (24+5), jack
- Hoods molded
- Connector gold-plated
- Color connector black/grey
- Packaging DIGITUS® Blister



271413 / DB-271253

271253 / DK-408003

In DIGITUS® Polybag

HDMI Adapter

DIGITUS® Blister HDMI adapter, 90° angled, premium



90° angled HDMI adapter for connection of HDMI cables to a TV or other HDMI devices, e.g. if there is low wall distance.

- Connector 1 HDMI type A, (19-pin), plug
- Connector 2 HDMI type A, (19-pin), jack
- Hoods molded
- Connector gold-plated
- Color connector black/grey
- Packaging DIGITUS® Blister



271468 / DB-271277

271277 / DK-408005
In DIGITUS® Polybag

DIGITUS® Blister HDMI - DVI adapter, premium



HDMI adapter for connection of a HDMI connection cables to the DVI interface of a PC or other device with DVI interface.

- Connector 1 HDMI type A, (19-pin), jack
- Connector 2 DVI-D, (18+1), plug
- Hoods molded
- Connector gold-plated
- Color connector black/grey
- Packaging DIGITUS® Blister



271451 / DB-271260

271260 / DK-408004
In DIGITUS® Polybag

DIGITUS® Blister HDMI adapter, premium



HDMI adapter for extension of two HDMI connection cables.






- Connector 1 HDMI type A, (19-pin), jack
- Connector 2 HDMI type A, (19-pin), jack
- Hoods molded
- Connector gold-plated
- Color connector black/grey
- Packaging DIGITUS® Blister



271475 / DB-271284

271284 / DK-408006
In DIGITUS® Polybag

DVI Information: Specifications / Features

Specification / Feature	DVI-A	DVI-I		DVI-D	
		Single-Link	Dual-Link	Single-Link	Dual-Link
Band Range	3,7 GBit/s, 165 MHz	3,7 GBit/s, 165 MHz	7,4 GBit/s, 330 MHz	3,7 GBit/s, 165 MHz	7,4 GBit/s, 330 MHz
Recommended resolution	1920 x 1200 pixel at 60 Hz (fit for 1080i)	1920 x 1200 pixel at 60 Hz (fit for 1080i)	2560 x 1600 pixel at 60 Hz (fit for 1080p)	1920 x 1200 pixel at 60 Hz (fit for 1080i)	2560 x 1600 pixel at 60 Hz (fit for 1080p)
Color Space	24 Bit RGB	24 Bit RGB	24 Bit RGB	24 Bit RGB	24 Bit RGB
Plug Type	DVI (12+5) 	DVI (18+5) 	DVI (24+5) 	DVI (18+1) 	DVI (24+1) 
Miscellaneous	Cable /Adapter with connected signal lines for analog video signals. Only for use of analog devices. This cable is not very common on the European market. Instead of DVI-A you can use DVI-I (Single-Link) cables as well.	Cable /Adapter with connected signal lines for analog and digital video signals. It's possible to use analog as well as digital devices.	Cable /Adapter with connected signal lines for analog and digital video signals. It's possible to use analog as well as digital devices.	Cable /Adapter with connected signal lines for digital video signals. Only digital devices can be used.	Cable /Adapter with connected signal lines for digital video signals. Only digital devices can be used.

DIGITUS® Blister DVI adapter, premium



DVI-I adapter for extension of two DVI connection cables.

- Connector 1 DVI-I, (24+5), jack
- Connector 2 DVI-I, (24+5), jack
- Hoods molded
- Connector gold-plated
- Color connector black/grey
- Packaging DIGITUS® Blister



271482 / DB-271291

271291 / DK-410001
In DIGITUS® Polybag

DIGITUS® Blister DVI adapter, premium



DVI-A adapter for connection of a VGA Monitor cable to the DVI interface of a PC.

- Connector 1 DVI-A, (12+5), plug
- Connector 2 HD DSUB, (15-pin), jack
- Hoods molded
- Connector gold-plated
- Color connector black/grey
- Packaging DIGITUS® Blister



271499 / DB-271307

271307 / DK-410002
In DIGITUS® Polybag

DIGITUS® Blister DVI adapter, premium



DVI-I adapter for connection of a DVI cable to the VGA Monitor interface of a PC.

- Connector 1 DVI-I, (24+5), jack
- Connector 2 HD DSUB, (15-pin), plug
- Hoods molded
- Connector gold-plated
- Color connector black/grey
- Packaging DIGITUS® Blister



271512 / DB-271321

271321 / DK-410003
In DIGITUS® Polybag

DisplayPort adapter, DP - HDMI



- Connector 1 DisplayPort, (20-pin), plug
- Connector 2 HDMI type A, (19-pin), jack
- Hoods plastic
- Mechanical plug interlock
- Plug and Play compatible
- Supports HDCP and DPCP
- Connector nickel-plated
- Color black

265207 / AK-435001

DisplayPort adapter, DP - DVI



- Connector 1 DisplayPort, (20-pin), plug
- Connector 2 DVI-I (24+5), jack
- Hoods plastic
- Mechanical plug interlock
- Plug and Play compatible
- Supports HDCP and DPCP
- Connector nickel-plated
- Color black

265214 / AK-435002

SATA connection cables with power connector, 90° angled



The cable serves for the internal Anschluss of SATA devices (e.g. hard disks). To save place in the PC the 22-pin SATA connector is 90° angled (right angled, cable to top).

- SATA 22-pin plug, 90° angled <=> SATA 7-pin + Power 4-pin plug
- Compatible with Serial ATA standards
- Suitable for data transfer rates up to 300 MB/s
- 7-wire cable, UL21149, 4 x data wires, 3 x earthing wires
- 4-wire cable, 4x power supply / jack (12V, GND, 5V, GND)
- 22-pin SATA plug - 7-pin SATA plug a. 4-pin power supply plug

269151 / AK-125006
0,50 m

SATA Adapters / Power over eSATA Cables

SATA adapter, micro SATA to SATA



This adaptor serves, for example to connect disk drives with Micro SATA interface (e.g. 4,6cm / 1.8 „ hard disks) also with internal standard SATA cables.

- Micro SATA 16-pin plug <=> SATA 22-pin jack
- Plastic housing
- Color: black

269083 / AK-425001

Po/eSATA extension cable, eSATA/USB - eSATA/USB



This cable serves to extend standard eSATA/USB connection cables. With this new interface external disk drives with suitable interfaces can be also pursued without additional power supply.

- eSATA/USB plug <=> eSATA/USB jack
- Compatible with Serial ATA and USB standards
- Molded housing
- Cable double shielded, AWG26
- UL2725
- Suitable for data transfer rates up to 300 MB/s
- Color: black

269120 / AK-126011
1,0 m

SATA adapter, slimline SATA to SATA



This adaptor serves, for example to connect disk drives with slimline SATA interface (e.g. 4,6cm / 1.8 „ hard disks) also with internal standard SATA cables.

- Slimline SATA 13-pin plug <=> SATA 22-pin jack
- Plastic housing
- Color: black

269090 / AK-425002

Po/eSATA Y-connection cable, eSATA/USB - eSATA + USB A



This cable serves, for example to connect disk drives with standard eSATA and/or USB interface (e.g., external hard disks, CD disk drives) to a PC with „Power over eSATA“ (eSATA/USB) interface. With this new interface external disk drives with suitable interfaces can be also pursued without additional net part.

- eSATA/USB plug <=> eSATA and USB A plug
- Compatible with Serial ATA and USB standards
- Molded housing
- Cable double shielded, AWG26
- UL2725
- Suitable for data transfer rates up to 300 MB/s
- Color: black

269137 / AK-126014
1,0 m

Po/eSATA connection cable, eSata/USB - eSata/USB



This cable serves, for example to connect disk drives with „Power over eSATA“ (eSATA/USB) to connections (e.g., external hard disks, CD disk drives) to a PC with „Power over eSATA“ interface. With this new interface external disk drives with suitable interface can be also pursued without additional power supply.

- eSata/USB plug <=> eSata/USB plug
- Compatible with Serial ATA and USB standards
- Molded housing
- Cable double shielded, AWG26
- UL2725
- Suitable for data transfer rates up to 300 MB/s
- Color: black

269113 / AK-126007
1,0 m

Po/eSATA adapter, eSATA/USB - eSATA + USB A



This adaptor serves, for example to connect disk drives with standard eSATA and/or USB connection (e.g. external hard disks, CD disk drives) to a PC with „Power over eSATA“ (eSATA/USB) interface. With this new interface external disk drives with suitable interfaces can be also pursued without additional power supply.

- eSATA/USB plug <=> eSATA + USB A jack
- Plastic housing
- Color: black

269106 / AK-426001

DIGITUS® SAS connection cable



This internal cable connects SAS (Serial Attached SCSI) devices to a SAS controller.

- SAS 29-pin plug (SFF-8482) - SAS 29-pin plug (SFF-8482)
- Molded housings
- Color: red



258438 / DK-127001
0,50 m

DIGITUS® SAS - SATA connection cable



This cable connects four Serial ATA devices to a SAS (Serial Attached SCSI) controller.

- SAS 29-pin plug (SFF-8484) - 2x SATA 7-pin plug + 5.25" power plug
- Molded housings
- Color: red



258445 / DK-127002
0,50 m

DIGITUS® SAS connection cable



This internal cable connects SAS (Serial Attached SCSI) devices.

- SAS 32-pin plug (SFF-8484) - SAS 32-pin plug (SFF-8484)
- Molded housings
- Color: red



258452 / DK-127003
0,50 m

DIGITUS® SAS connection cable



This internal cable connects four SAS (Serial Attached SCSI) devices to a SAS controller.

- SAS 32-pin plug (SFF-8484) - 4x SAS 29-pin plug (SFF-8482) + 5.25" power plug
- Molded housings
- Color: red



258469 / DK-127004
0,50 m

DIGITUS® SAS - SATA connection cable



This cable connects four Serial ATA devices to a SAS (Serial Attached SCSI) controller.

- SAS 32-pin plug (SFF-8484) - 4x SATA 7-pin plug
- Molded housings
- SATA plugs with metal latch
- Color: red



258476 / DK-127005
0,50 m

DIGITUS® SAS - SATA connection cable



This internal cable connects four Serial ATA devices to a SAS (Serial Attached SCSI) controller.

- SAS 32-pin plug (SFF-8484) - 4x SATA 7-pin plug + 6-pin LED jack
- Molded housings
- SATA plugs with metal latch
- LED power supply connection cable for drive cage LEDs (2 x 3-pin female header)
- Color: red



258483 / DK-127006
0,50 m

SAS Cables

DIGITUS® SAS connection cable



This internal cable connects SAS (Serial Attached SCSI) devices.

- Mini SAS 36-pin plug (SFF-8087) - Mini SAS 36-pin plug (SFF-8087)
- Molded housings
- SFF-8087 plugs with metal latch
- Color: red with meshwork sleeve



258551 / DK-127008
0,50 m

DIGITUS® SAS connection cable



This internal cable connects SAS (Serial Attached SCSI) devices.

- Mini SAS 36-pin plug (SFF-8087) - SAS 32-pin plug (SFF-8484)
- Molded housings
- SFF-8087 plug with metal latch
- Color: red with meshwork sleeve



258575 / DK-127009
0,50 m

DIGITUS® SAS - SATA connection cable




This internal cable connects four Serial ATA devices to a SAS (Serial Attached SCSI) device.

- Mini SAS 36-pin plug (SFF-8087) - 4x SATA 7-pin plug
- Molded housings
- SFF-8087 plug with metal latch
- Color: red



258582 / DK-127010
0,50 m

DIGITUS® SAS - SATA connection cable




This internal cable connects four Serial ATA devices to a SAS (Serial Attached SCSI) device.

- Mini SAS 36-pin plug (SFF-8087) - 4x SATA 7-pin plug
- Molded housings
- All plugs with metal latch
- Color: transparent/blue with meshwork sleeve



258599 / DK-127011
0,50 m

DIGITUS® SAS connection cable



This internal cable connects SAS (Serial Attached SCSI) devices.

- Mini SAS 36-pin plug (SFF-8087) - 4x SAS 29-pin plug (SFF-8482) + 4x 5.25" power plug
- Molded housings
- SFF-8087 plug with metal latch
- Color: black



258605 / DK-127012
0,50 m

DIGITUS® SAS connection cable



This external Infiniband cable connects SAS (Serial Attached SCSI) devices.

- SAS Infiniband plug (SFF-8470) - SAS Infiniband plug (SFF-8470)
- Metal housings
- Color: black



258612 / DK-127013
1,0 m

DIGITUS® SAS connection cable




This external cable connects SAS (Serial Attached SCSI) devices.

- Mini SAS 26-pin plug (SFF-8088) - Mini SAS 26-pin plug (SFF-8088)
- Metal housings
- Color: black



258629 / DK-127014
1,0 m

DIGITUS® SAS - eSATA connection cable




This external cable connects four Serial ATA devices to a SAS (Serial Attached SCSI) device.

- Mini SAS 26-pin plug (SFF-8088) - 4x eSATA 7-pin plug
- eSATA plugs with molded housings
- SFF-8088 plug, metal housing
- Color: transparent/blue



258650 / DK-127017
1,0 m

DIGITUS® SAS connection cable

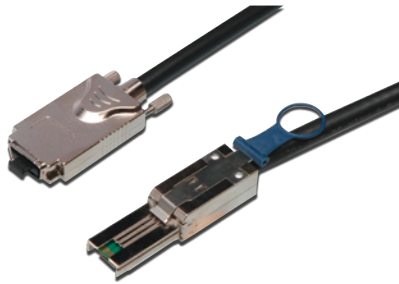


This external cable connects SAS (Serial Attached SCSI) devices.

- SAS Infiniband plug (SFF-8470) - Mini SAS 26-pin plug (SFF-8088)
- Metal housings
- Color: black



258636 / DK-127015
1,0 m

Internal power extension cable, ATX



With this cable you can extend the internal ATX 24-pin power connection cable.

- Connector 1 ATX 24-pin plug
- Connector 2 ATX 24-pin jack
- Packaging Polybag



276074 / AK-134003
0,2m

DIGITUS® SAS connection cable




This external cable connects SAS (Serial Attached SCSI) devices.

- Mini SAS 26-pin plug (SFF-8088) - Mini SAS 36-pin plug (SFF-8087)
- SFF-8088 plug, metal housing
- SFF-8087 plug, molded housing
- Color: transparent/blue



258643 / DK-127016
1,0 m

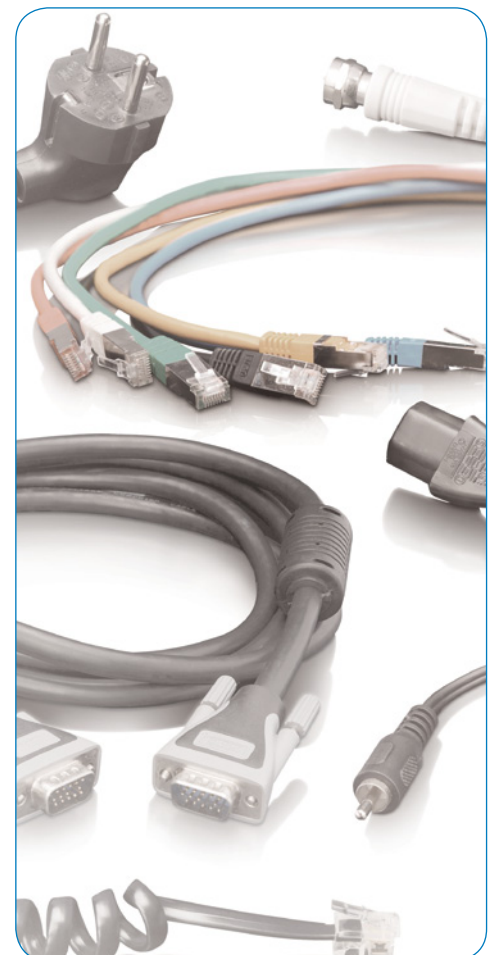

Premium Patchcables

DIGITUS® Premium CAT 6a S-FTP patch cable



- Pairs with foil and full braid shielded (PIMF) CAT 6a patch cable
- Spot length on boot
- Boot with kink protection and strain relief
- Connection 1:1
- Twisted pair
- 2 x special RJ45 male, shielded
- Halogen free
- Qualified for 10 Gbit Ethernet



0,5m	DK-1641-A-005 271314
1,0m	DK-1641-A-010 271338
2,0m	DK-1641-A-020 271345
3,0m	DK-1641-A-030 271352
5,0m	DK-1641-A-050 271369
7,0m	DK-1641-A-070 271383
10,0m	DK-1641-A-100 271390
15,0m	DK-1641-A-150 271420
20,0m	DK-1641-A-200 271437
30,0m	DK-1641-A-300 271444


DIGITUS® CAT 5e unshielded flat patch cable




- Unshielded CAT 5e patch cable
- Spot length on boot
- Boot with strain relief
- Connection 1:1



The premium flat patch cable is perfect to lay under laminate, carpets or behind skirting boards

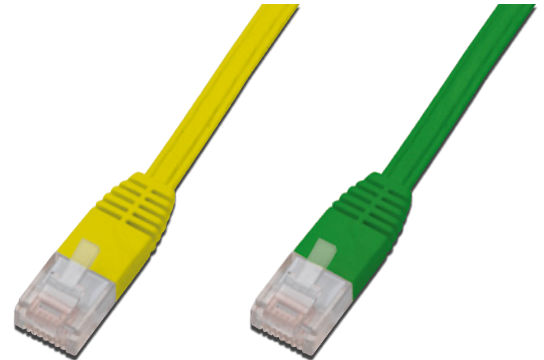

	yellow	green	black	white
0,5m	DK-1511-005F/Y 275367	DK-1511-005F/G 275343	DK-1511-005F/BL 275350	DK-1511-005F/WH 274094
1,0m	DK-1511-010F/Y 275398	DK-1511-010F/G 275381	DK-1511-010F/BL 275374	DK-1511-010F/WH 274001
2,0m	DK-1511-020F/Y 275428	DK-1511-020F/G 275411	DK-1511-020F/BL 275404	DK-1511-020F/WH 274087
3,0m	DK-1511-030F/Y 275459	DK-1511-030F/G 275442	DK-1511-030F/BL 275435	DK-1511-030F/WH 273998
5,0m	DK-1511-050F/Y 275480	DK-1511-050F/G 275473	DK-1511-050F/BL 275466	DK-1511-050F/WH 274018
7,5m	DK-1511-075F/Y 275510	DK-1511-075F/G 275503	DK-1511-075F/BL 275497	DK-1511-075F/WH 274070

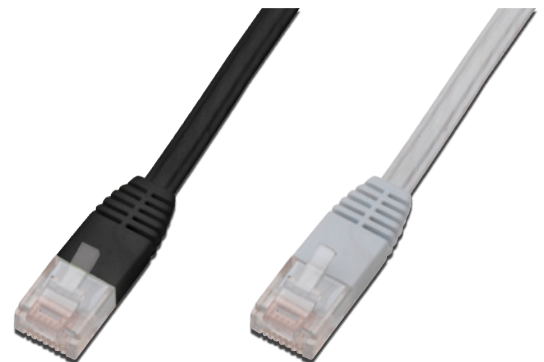

ASSMANN

The World of Cables

Novelties 2010-I



Germany

ASSMANN Electronic GmbH
Auf dem Schüffel 3
D-58513 Lüdenscheid

Tel. +49 / 0 23 51 / 5 54 - 0
Fax +49 / 0 23 51 / 5 54 - 145
E-mail info@assmann.com
Internet www.assmann.com



Austria

ASSMANN Electronic GmbH
Gewerbepark 8
A-8401 Kalsdorf / Graz

Tel. +43 / 31 35 / 5 44 33 - 0
Fax +43 / 31 35 / 5 44 33 - 22
E-mail office@assmann24h.at
Internet www.assmann24h.at



France

ASSMANN Electronic S.A.R.L.
Villa Parc - Immeuble le Chêne
Allée Lech Walesa
F-77185 Lognes

Tel. +33 / 1 / 60 17 91 51
Fax +33 / 1 / 64 80 44 73
E-mail info@assmann.fr
Internet www.assmann.fr



Sweden

ASSMANN Electronic AB
Bryggargatan 6
149 41 NYNÄSHAMN
SWEDEN

Tel. +46 / 8 52 02 06 60
Fax: +46 / 8 52 02 12 61
E-mail info@assmann.se
Internet www.assmann.se



Croatia

ASSMANN Elektronika D.O.O.
Radnička cesta 220
HR-10000 Zagreb

Tel. +385 / 1 / 4 66 03 08
Fax +385 / 1 / 4 66 03 09
E-mail info@assmann.hr
Internet www.assmann.hr



Slovenia

ASSMANN Electronic Slovenia
Sales Office Slovenia
Jocova 12
SLO-2000 Maribor

Tel. +386 / 2 / 4 21 51 77
Fax +386 / 2 / 6 20 19 32
E-mail p.jezernik@assmann24h.at
Internet www.assmann24h.at



Poland

ASSMANN Distribution SP. z o.o.
ul. Szczecińska 17-21
PL 54-517 Wrocław

Tel. +48 / 71 / 32 67 11 40
Fax +48 / 71 / 32 67 11 41
E-mail office@assmann.pl
Internet www.assmann.pl



Mexico

ASSMANN Electronics, S.A. de C.V.
Cerrada de la Punta 117
Colonia Vista Alegre
MX-76074 Querétaro, Qro.

Tel. +52 / 4 42 / 2 23 - 2275
Fax +52 / 4 42 / 2 23 - 5081
E-mail contacto@assmann.com.mx
Internet www.assmann.com.mx



USA

ASSMANN Electronics, Inc.
1840 West Drake Drive Suite 101
Tempe, AZ 85283, USA

Tel. +1 / 4 80 / 8 97 - 70 01
Fax +1 / 4 80 / 8 97 - 72 55
Toll Free +1 / 8 77 / 277 / 62 66
E-mail info@usa-assmann.com
Internet www.usa-assmann.com



Taiwan

ASSMANN Electronic Taiwan Branch
Suite 3, 20F, No. 508, Sec. 5
Chung Hsiao East Road
Taipei / Taiwan

Tel. +886 / 2 / 27 27 83 35
Fax +886 / 2 / 27 59 22 32
E-mail info@assmann.com.tw
Internet www.assmann.com



China

ASSMANN Electronic China Branch
Room 2C, 2F, Jin Lian Xuan,
Lotus Plaza, No.126
De Zheng Zhong RD. Changan Town,
Dongguan City, Guangdong 523847, China
Tel. +86 / 769 / 85 42 62 - 01 and 02
Fax +86 / 769 / 85 42 62 00
E-mail info@assmann.com.tw
Internet www.assmann.com



Switzerland

Simpex-IT Solutions AG
Europastrasse 15
8152 Glattbrugg

Tel. +41 / 43 501 / 39 00
Fax +41 / 43 501 / 39 01
E-mail www.simpex-it.ch
Internet info@simpex-it.ch