

PE1216/PE1324

Energy PDU

- The PE1216/PE1324 Energy PDU contains 16/24 AC outlets and is available in IEC or NEMA socket configurations. The PE1216/PE1324 Energy PDU features a space-saving 0U design that allows it to be mounted vertically on the outside of a rack, resulting in a more efficient use of space in the server room, while providing 16/24 AC outlets.

The PE1216/PE1324 Energy PDU can be integrated into an installation with the EC1000 Energy Box*, allowing you to monitor the real-time current and environmental conditions of the Energy PDU from the front panel of the EC1000 at the rack, or via Web GUI remotely – making your server room efficiently green with ease.


* ATEN EC1000 Energy Box and energy management software – eco Sensors are available at www.aten.com.

Features

- Space saving 0U rack mount design
- IEC or NEMA outlet models
- Real-time PDU current monitoring *

* When used in conjunction with the EC1000 Energy Box

PE1216 PE1324

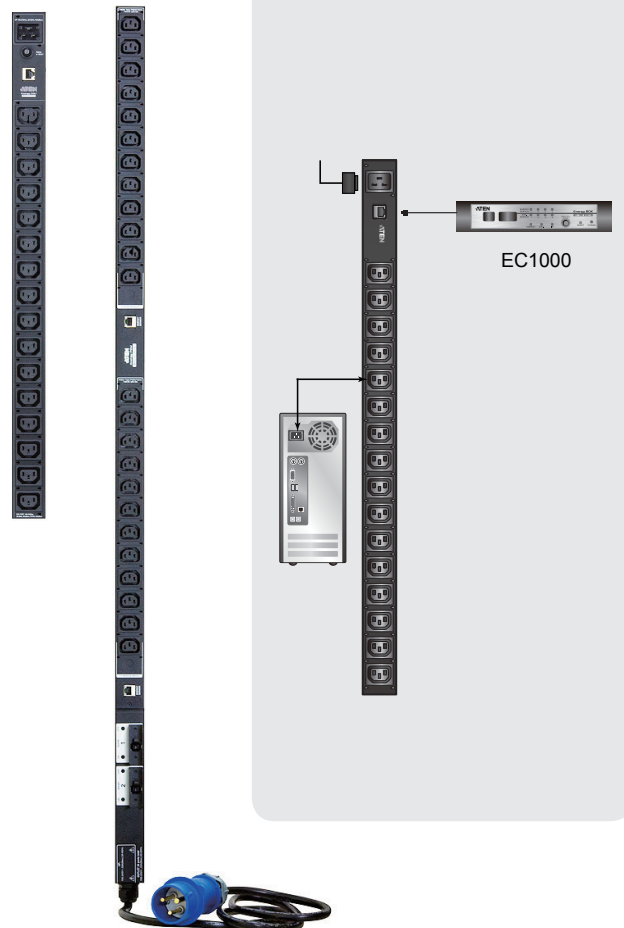

Specification

Function		PE1216A	PE1216B	PE1216G	PE1324B	PE1324G
Power Outlets	Direct	16 x NEMA 5-15R	16 x IEC C13	16 x IEC C13	24 x IEC C13	24 x IEC C13
	Inlet	1 x IEC60320 C20	1 x IEC60320 C20	1 x IEC60320 C20	1 x NEMA L6-30P	1 x IEC 60309 32A
	Energy Sensor Port	1 x RJ-45 Female			2 x RJ-45 Female	
Nominal Input Power		100-120V~, 50/60Hz, 20A(Max), 16A(UL de-rated)	100-240V~, 50/60Hz, 20A(Max), 16A(UL de-rated)	100-240V~, 50/60Hz, 16A(Max)	100-240V~, 50/60Hz, 30A(Max), 24A(UL de-rated)	100-240V~, 50/60Hz, 32A(Max)
Nominal Output Power		100-120V~, 50/60Hz Per Outlet 15A (Max), 12A(UL de-rated) Total : 20A(Max), 16A(UL de-rated)	100-240V~,50/60Hz Per outlet 15A (Max), 12A(UL de-rated) Total : 20A(Max), 16A(UL de-rated)	100-240V~,50/60Hz Per Outlet 10A (Max) Total : 16A(Max)	100-240V~,50/60Hz Per bank 15A (Max), 12A (UL de-rated) Total : 30A(Max), 24A(UL de-rated)	100-240V~,50/60Hz Per bank 16A (Max) Total : 32A(Max)
Environment	Operating Temp.	0 – 50°C				
	Storage Temp.	-20 – 60°C				
	Humidity	0 – 80% RH, Non-Condensing				
Physical Properties	Housing	Metal				
	Weight	1.31 kg	1.31 kg	1.23 kg	3.47 kg	3.47 kg
	Dimensions (L x W x H)	73.00 x 4.40 x 4.40 cm		68.00 x 4.40 x 4.40 cm	134.00 x 4.40 x 4.40 cm	

ATEN International Co., Ltd.

3F., No.125, Sec. 2, Datong Rd., Sijhih District., New Taipei City 221, Taiwan
 Phone: 886-2-8692-6789 Fax: 886-2-8692-6767
www.aten.com E-mail: marketing@aten.com

Printed 04/2012 V1.0



© Copyright 2012 ATEN® International Co., Ltd.
 ATEN and the ATEN logo are trademarks of ATEN International Co., Ltd.
 All rights reserved. All other trademarks are the property of their respective owners.