

## **ATEN Solution Benefits**



## Complete compatibility

The VC812 HDMI—to—VGA and VC180 VGA—to—HDMI converters provide com—plete compatibility between old and new hardware, allowing a smooth and cost—effective transition for the school.



## Award—winning usability

Designed with the user in mind, the VM1600 16x16 Modular Matrix Switch is a pro A/V solution for video wall and digital signage applications. With its Red Dot Design Award—winning interface, the VM1600 reduces the complexity associated with video wall configurations, digital signage setups, and their control, ensuring the shortest learning curve for all staff at the school.



## Long distance and high-quality HDMI

The HDBaseT—Lite Extenders (VE802T/VE802R) are able to deliver 1080p HDMI video transmissions up to 70m via Cat 6a cables, without signal interference. Thanks to Power over HDBaseT (POH) technology, the VE802 is powered entirely through its Ethernet cable and does not require an external power source — providing the lowest installation hassle and cost for the school—wide system.




## Future-proof

The VM1600's module—like constructive, which allows a variety of different in—put/output boards to be switched in and out, ensures that the ATEN A/V solution is both dynamic and easily upgradeable. Furthermore, as both the VM1600 and VE802 extenders support 4K transmissions when using Cat 6a cabling (to 40m – easily upgradeable to 70m with the VE812), the school is already set for the future standard in ultra high definition broadcasts.



# Solution Architecture

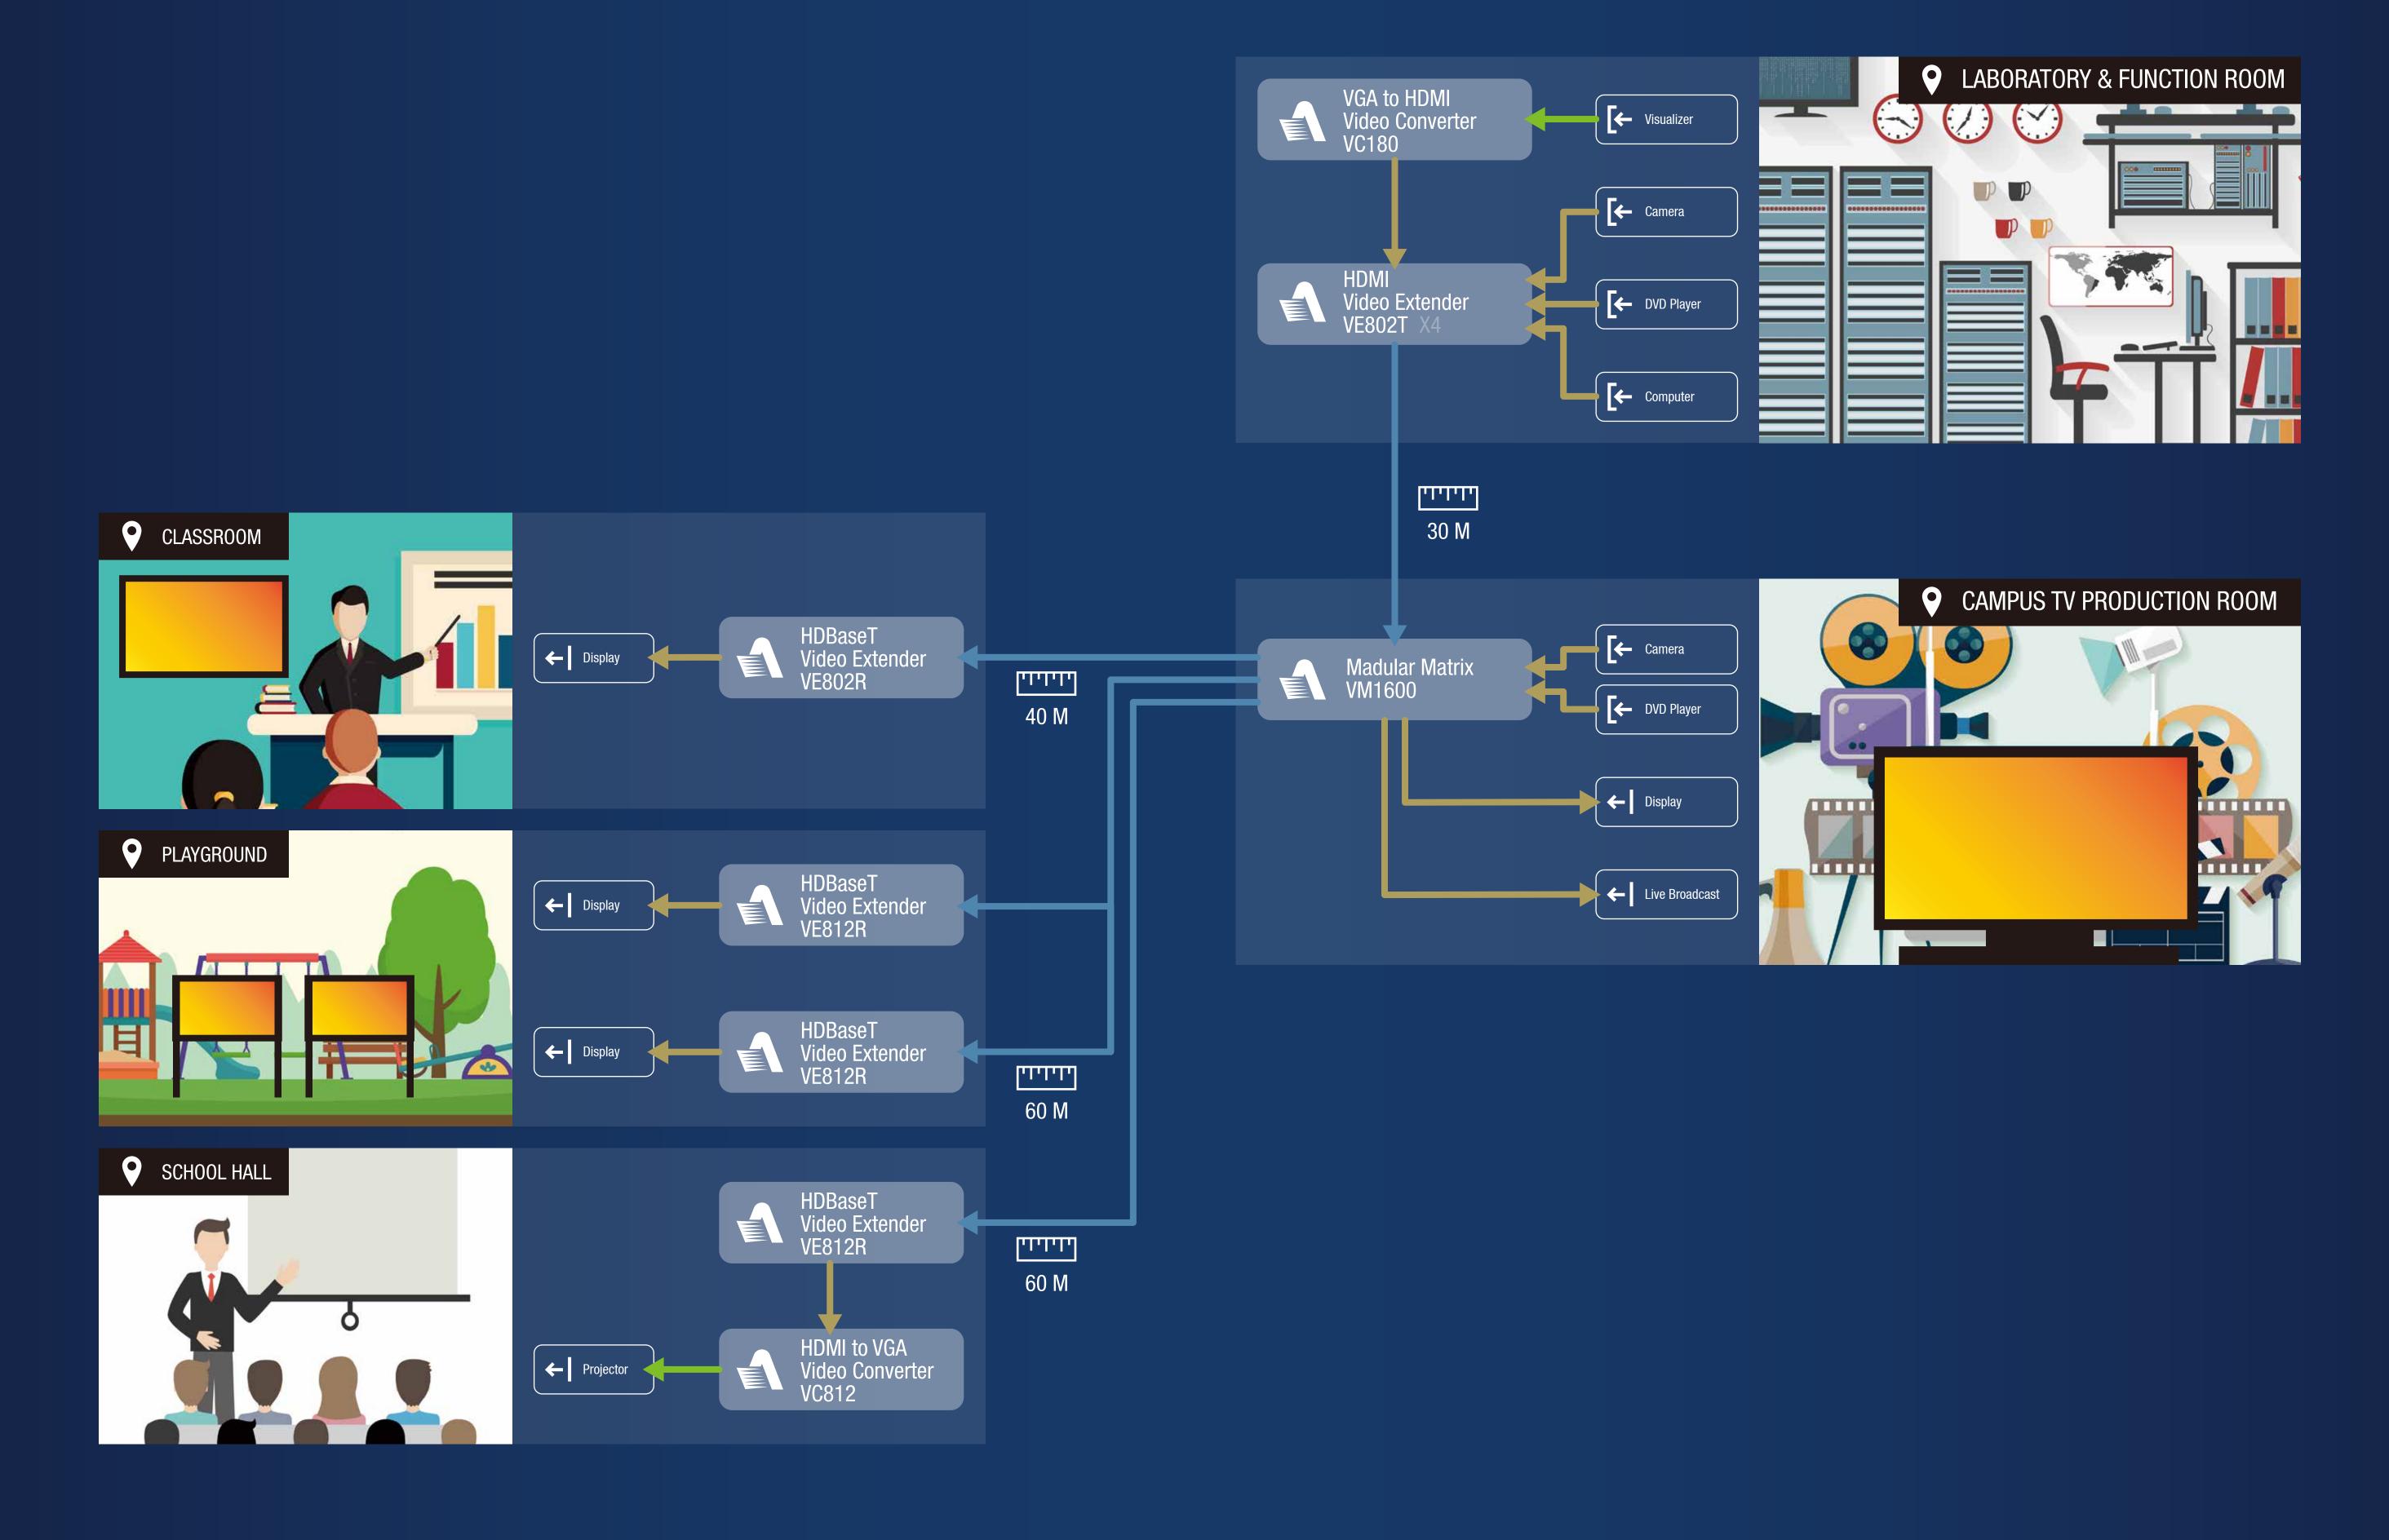










**(** 











## **Product Overview**

#### Modular Matrix Switch

VM1600



- Connects any of 16 video sources to any of 16 displays
- Video wall allows you to create custom video wall layouts via intuitive web GUI
- Seamless Switch™ provides continuous video streams, real—time switching and stable signal transmission

## 4—Port HDBaseT Input/Output Board

VM7514 / VM8514



- HDBaseT Connectivity extends 4 HDBaseT connections up to 100 meters via single Cat 5e/6 cable
- HDBaseT Anti—jamming resists signal interference during video transmission using HDBaseT technology
- Bi-directional IR channel IR transmission is processed one direction at a time

## 4—Port HDMI Input/Output Board

VM7804 / VM8804



- Superior video quality HDTV resolutions of 480p, 720p, 1080i and 1080p (1920 x 1080)
- Audio—enabled, HDMI audio can be extracted and stereo audio can be embedded
- Consumer Electronics Control (CEC) support



## **Product Overview**

### HDMI HDBaseT-Lite Transmitter/Receiver

VE802T / VE802R



- POH (Power over HDBaseT) supplies power from Transmitter to Receiver over a long distance via one Cat 5e/6/6a cable
- HDBaseT Connectivity extends an HDMI connection over a long distance via one Cat 5e/6/6a cable
- HDMI (3D, Deep Color, 4K) and HDCP compatible

### VGA to HDMI Converter

VC180



- Superior video quality up to 1080p, WUXGA
- No software required eliminates incompatibility and installation issues
- Supports dual power sources: VGA port or power adapter (in case the VGA port cannot provide sufficient power)

