


KVM solutions for small to large businesses.

Desktop and cable KVM Switches

- USB hub integrated
- power-on detection
- independent switching
- advanced security settings (CS1184)
- control via hotkeys, mouse, OSD, pushbuttons

	Video interface	Ports	Resolution
Cable KVM Switch			
CS692	HDMI	2	up to 1920 x 1200
Desktop KVM Switches			
CS1734B	VGA	4	up to 2048 x 1536
CS1764A	DVI-I	4	up to 1920 x 1200
CS1784A	DVI-I (DL)	4	up to 2560 x 1600
CS1794	HDMI	4	up to 1920 x 1200
CS782DP	DisplayPort	2	up to 3840 x 2160
CS1944	Mini DisplayPort	4	up to 2560 x 1600
CS1184	DVI-I (DL)	4	up to 2560 x 1600

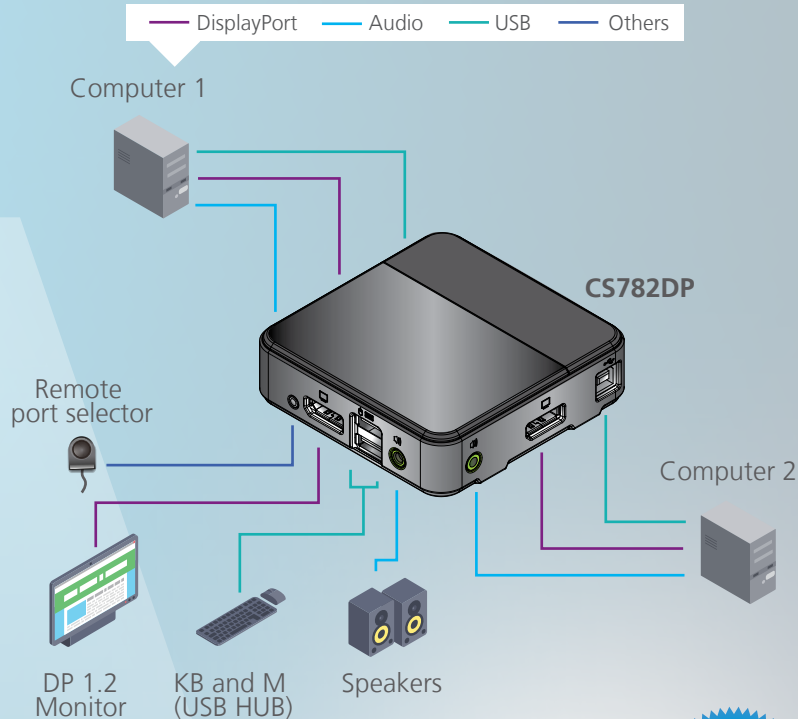

A 4K workstation connected to 2 computers.


**Product
CS782DP**



Rack KVM Switches

- rack mountable, 1U
- independent switching
- USB hub for peripherals
- two-level password authorization
- keyboard and mouse broadcasting
- expandable: daisy chain or cascade

	Video interface	Ports	Resolution
KVM Switches			
CS1768	DVI-I, VGA	8	up to 1920 x 1200
CS1788	DVI-I (DL), VGA	8	up to 2560 x 1600
CS1798 / CS17916	HDMI	8 / 16	up to 1920 x 1200
CS1308 / CS1316	VGA	8 / 16	up to 2048 x 1536
CS1758Q9	VGA + audio	8	up to 2048 x 1536
CS1708A / CS1716A	VGA	8 / 16	up to 2048 x 1536

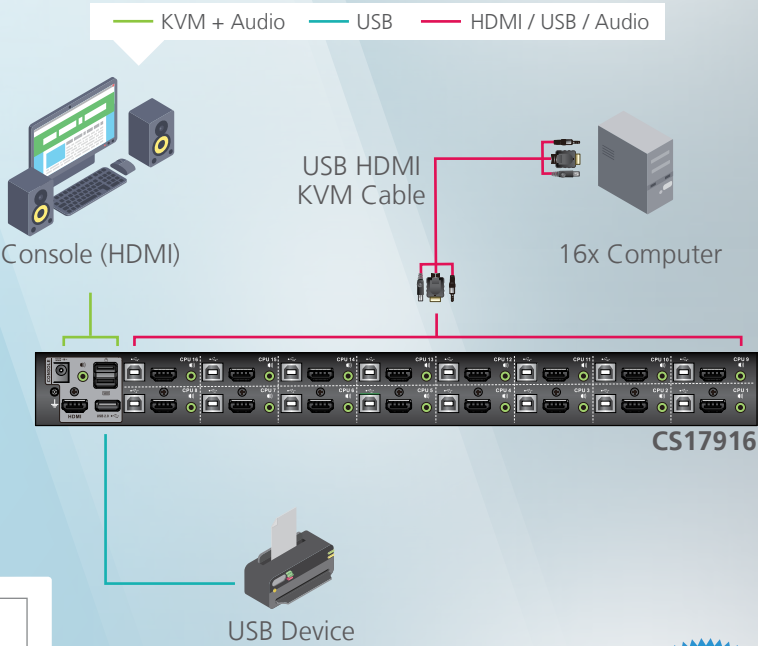

Easily control up to 16 HDMI computers.

Product
CS17916




Multi-View KVM control center

- USB hub integrated
- rack mountable, 1U
- power-on detection
- expandable: daisy chain
- independent switching: KVM, USB, audio
- multi-view with picture-in-picture mode (PiP)
- control via hotkeys, mouse, OSD, pushbuttons

	Video interface	Ports	Resolution
KVM control center			
CM1164	DVI-D	4	up to 1920 x 1200

Quad-view and PiP modes:

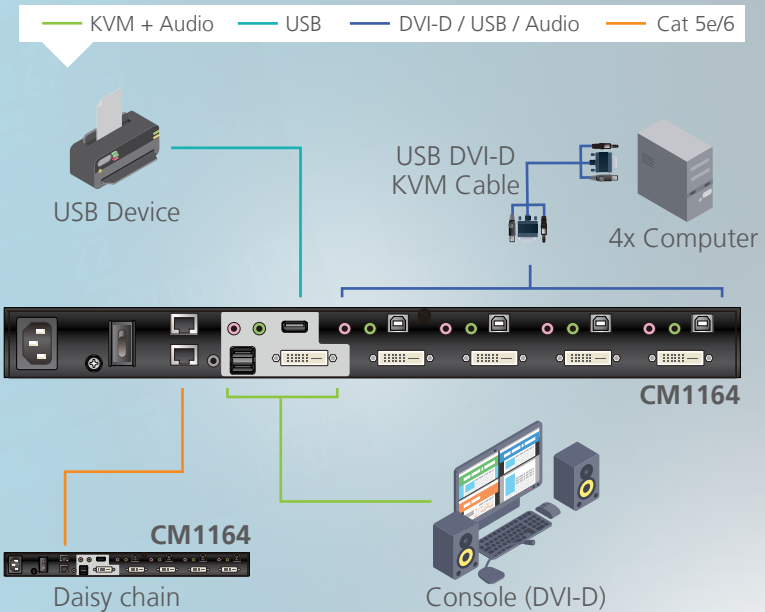

Control up to 4 computers on a single screen.


Product CM1164



LCD Consoles and LCD KVM Switches

- USB peripherals
- rack mountable, 1U
- second console port
- single (SR) or dual rail (DR)
- expandable: daisy chain or cascade
- with or without KVM switch integrated

	Video interface	Ports	Size (inch)	Resolution
LCD Consoles				
CL6700N	DVI-I + audio	1	19 (SR)	up to 1280 x1024
CL6700MW	DVI-D, VGA, HDMI	1	17,3 (SR)	up to 1920 x 1080
CL1000N	VGA	1	19 (SR)	up to 1280 x1024
CL5800N	VGA	1	19 (DR)	up to 1280 x1024
LCD KVM Switches				
CL6708MW	DVI-I	8	17,3 (SR)	up to 1920 x 1080
CL1016M	VGA	16	17 (SR)	up to 1280 x1024
CL5716M / CL5716N	VGA	16	17 / 19 (SR)	up to 1280 x1024
CL5816N	VGA	16	19 (DR)	up to 1280 x1024

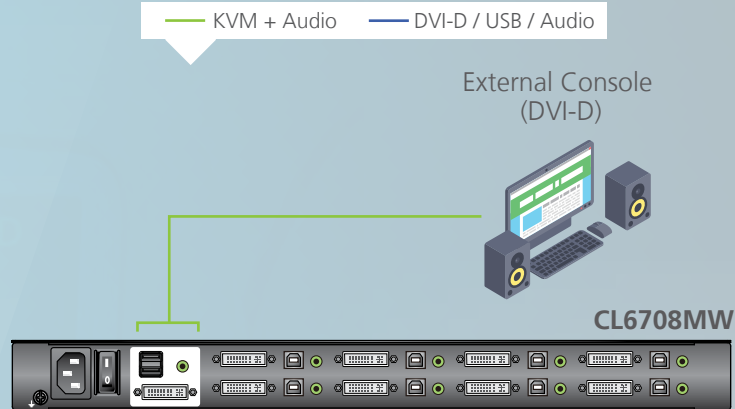

Local server maintenance in Full HD.


**Product
CL6708MW**



Over IP control units and KVM Over IP Switches

- LAN / WAN
- virtual media
- PCI card (IP8000)
- panel array mode
- power control (KN1000)
- dual power and dual network (CN8600)
- rack mountable, 1U (CS1708I / CS1716I)


	Video interface	Ports	Resolution
Over IP control units			
IP8000	VGA	1	up to 1600 x 1200
CN8000	VGA	1	up to 1600 x 1200
CN8600	DVI-D	1	up to 1920 x 1200
KN1000	VGA	1	up to 1600 x 1200
KVM Over IP Switches			
CS1708I / CS1716I	VGA	8 / 16	up to 2048 x 1536

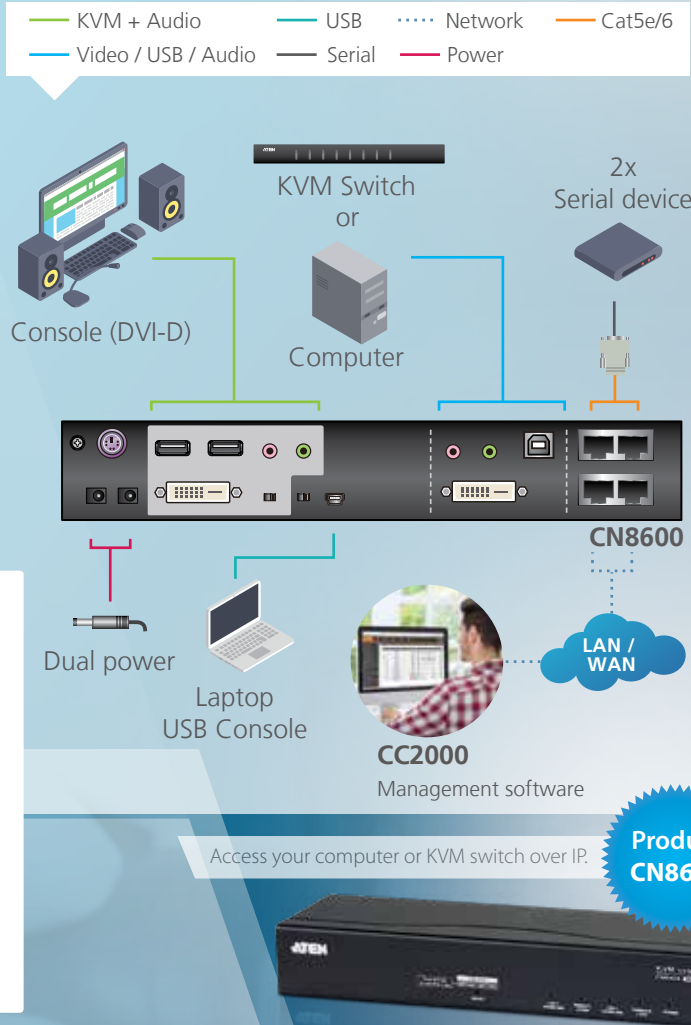

KVM Extenders

- virtual media (CE800B)
- deskew (CE770, CE775)
- dual view (CE775, CE604)
- USB hub integrated (CE610)
- control via OSD and WebGUI (CE790)

	Interface	Resolution	Distance
KVM Extenders			
CE700A	VGA, RJ-45	up to 1920 x 1200	150m
CE800B	VGA + audio, RJ-45	up to 1920 x 1200	250m
CE770	VGA + audio, serial, RJ-45	up to 1920 x 1200	300m
CE775	VGA + audio, serial, RJ-45	up to 1920 x 1200, dual view	300m
CE604	DVI-D + audio, RJ-45	up to 1920 x 1200, dual view	60m
CE610	DVI-D, HDBaseT	up to 1920 x 1200	100m
CE690	DVI-D + audio, fiber	up to 1920 x 1200	20km
CE790	VGA + audio, RJ-45	up to 1920 x 1200	LAN

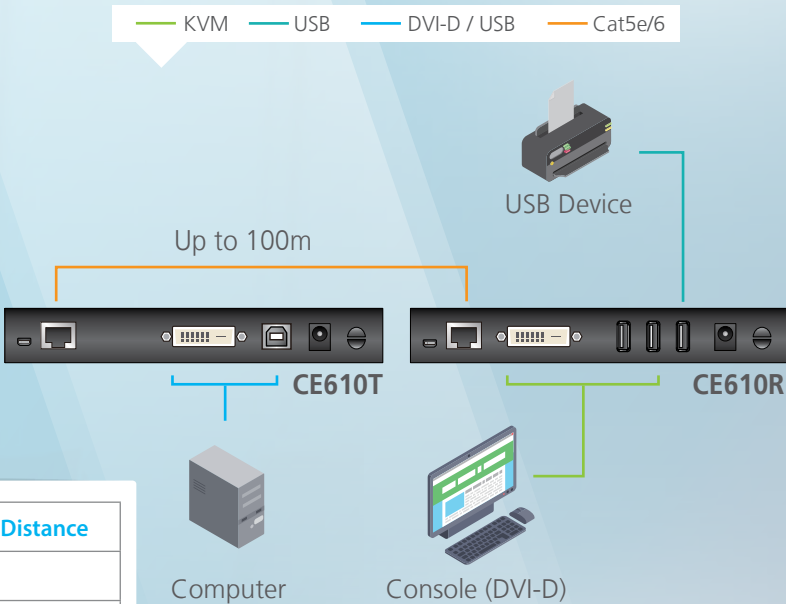

Access your computer remotely with HDBaseT technology.

Product
CE610



Total solution for small to large businesses.

ATEN provides management solutions for any SMB-sized IT setup which allow computers or servers to be managed locally and remotely within a closed circuit or from any location over IP.

