


Unmanaged LCD Ethernet Switches

	Fast Ethernet PoE+			Gigabit PoE+			802.3bt PoE++
Model	FGSD-1022VHP	FGSW-1822VHP	FGSW-2622VHP	GSD-1002VHP	GSW-1820VHP	GSW-2620VHP	GSW-1222VUP

Hardware	10/100BASE-TX	8	16	24	-	-	-
	10/100/1000BASE-T	2	2	2	10	16	10
	Mini-GBIC/SFP	2 combo	2 combo	2 combo	-	2	2
	Switch Fabric	5.6Gbps	7.2Gbps	8.8Gbps	20Gbps	36Gbps	52Gbps
	MAC Table	4K	4K	4K	8K	8K	8K
	Jumbo Frame	-	-	-	9K	9K	10K
	Memory Buffer	2.75Mb	2.75Mb	2.75Mb	4.1Mb	4.1Mb	4.1Mb
PoE	PoE Standard	802.3at PoE+	802.3at PoE+	802.3at PoE+	802.3at PoE+	802.3at PoE+	802.3bt PoE++ (Ultra PoE), 802.3at PoE+
	PoE Port	8	16	24	8	16	24
	PoE Budget	120W	300W	300W	120W	300W	380W
Interface	Auto-negotiation	•	•	•	•	•	•
	802.3x Flow Control	•	•	•	•	•	•
	Ethernet Distance Extension	250m via DIP switch	-	-	250m via DIP switch	250m via DIP switch	250m via DIP switch
Physical	Dimensions (W x D x H)	280 x 180 x 44 mm	440 x 233 x 44 mm, 1U height	440 x 233 x 44 mm, 1U height	280 x 180 x 44 mm	440 x 233 x 44 mm, 1U height	440 x 233 x 44 mm, 1U height
	Power Supply	100~240V AC, 50/60Hz			100~240V AC, 50/60Hz		100~240V AC, 50/60Hz, 6A max.
	EMI/Safety	FCC Class A, CE			FCC Class A, CE		FCC Part 15 Class A, CE
	Material	Metal	Metal	Metal	Metal	Metal	Metal
	Rack mountable	•	•	•	•	•	•

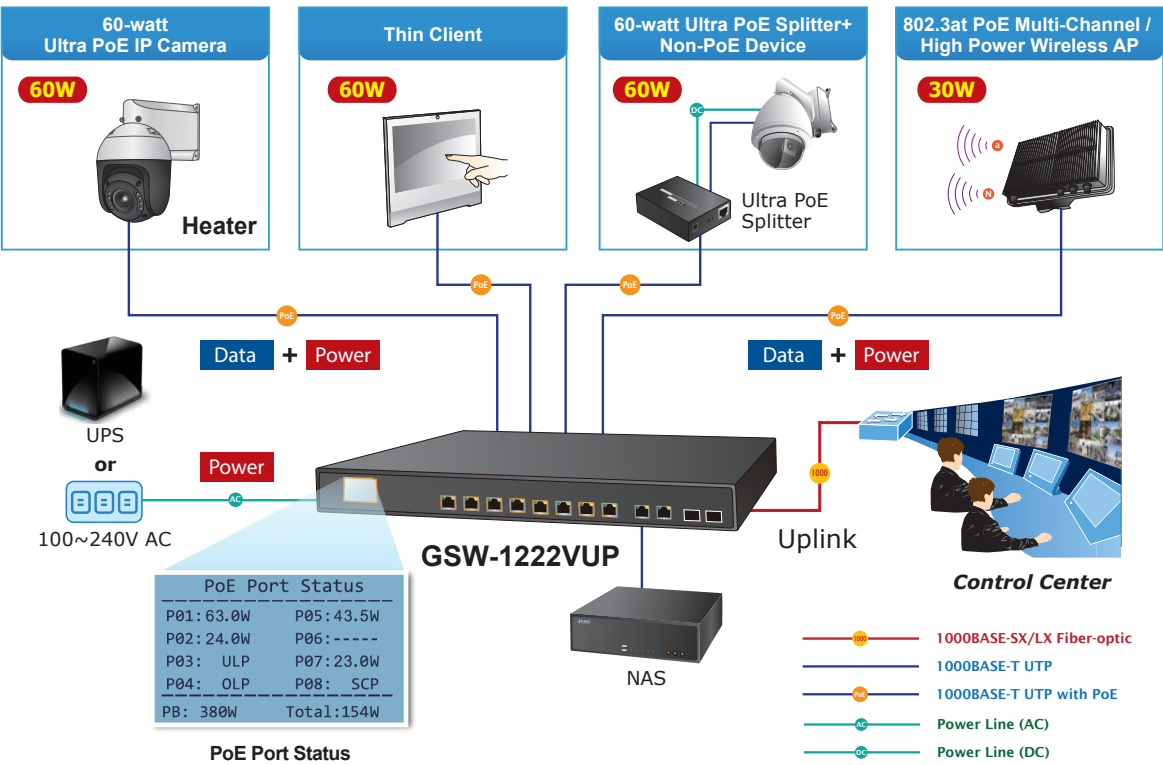

www.PLANET.com.tw

LCD Ethernet Switches

Plug & Watch
Smart Network Management

- L3 Static Routing
- 10Gbps SFP+
- LCD System Configuration & Monitoring
- LCD QoS Easy Control
- LCD Network Diagnostic
- LCD PoE Status Display
- ONVIF Discovery



11F, No 96, Minquan Rd., Xindian Dist., New Taipei City 231, Taiwan (R.O.C)
Tel: +886-2-2219-9518 Fax: +886-2-2219-9528 E-mail: sales@planet.com.tw
PLANET reserves the right to change specifications without prior notice. All brand names and trademarks are property of their respective owners. © PLANET Technology Corporation DM-LCD0517

