

## High Definition HDMI Extender over IP with PoE



### Make Advertising Effective and Easy

PLANET IHD-210 HDMI Extender over IP with PoE delivers a great Full-HD video distribution solution such as bringing an efficient and effective advertising deployment. The IHD-210 series is the combination of the transmitter, IHD-210PT, and the receiver, IHD-210PR. They can distribute HD digital content from multiple sources to practically any number of remote displays on a LAN and deliver ultra high-quality 1080p HDMI video broadcast over IP network. It not only offers vivid 1080p full motion video, but also ensures the sharp images and text give the viewers the maximum visual effect and ease of reading. By cascading multiple Ethernet switches as the backbone of the IHD-210 series, it allows displays to be distributed far away from the source devices while sustaining consistent 1080p video and audio quality. The video sources can be rack centralized, decentralized or even a mixture of both. It thus increases the flexibility, scope and scalability of audio and video distribution via the Ethernet networks.



### IR Extension for Controlling Video Source

The IHD-210 series is a perfect solution for audio and video signal extension via the existing LAN. Designed with IR transmitter and receiver interface, it allows users to control the video source at the terminal destination. The IHD-210 series also features bi-directional IR extension and RS232 pass-through allows the user to cascade the system enabling them to extend the transmission distance without signal loss or delay. Its numerical LED indication enables users to recognize immediately the current group ID. It also supports HDMI Local Output function for checking video source conveniently. Besides, with PoE function, there is no additional power supply needed, and the IHD-210 series thus reduces the complexity of cable installation.

### HDMI Network


- 1080p ultra high-quality video transmitter
- Supports IR extension for controlling video source
- Supports RS232 bi-directional remote extension
- Assigns video sources to any monitor of the video extend system
- The selectable 64-channel DIP switch is easily applied for multi-casting group matching
- 1-to-1, 1-to-many and multi-casting broadcasting architectures allow to add more displays without increasing LAN bandwidth loading

### Video Output Characteristics

- Compatible with HDTV resolution of 1080p and 1080i
- High compression streaming for saving bandwidth
- HDCP compliant and blu-ray ready
- Supports HDMI local output
- Compatible with common screen resolutions from XGA, SXGA, UXGA and WSXGA to Full HD system
- Supports HDMI with 2-ch uncompressed audio


### Easy Installation and Management

- Numerical LED indication for identifying group ID
- IEEE 802.3af/at PoE+ function supported; no additional power supply needed
- Automatic EDID (Extended Display Identification Data) configuration
- Simple utility for ease of use
- Supports multi-casting group with Ethernet Managed Switch (IGMP snooping function required)

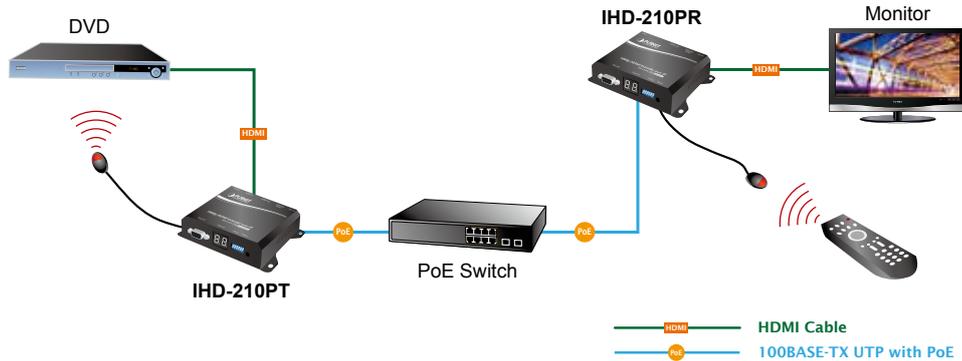

**Exclusive Video Transmission by IGMP Snooping Technology**


One IHD-210PT in local site can drive multiple IHD-210PRs in remote sites without consuming extra network loading. Integrated with PoE switch built-in with IGMP snooping function, there are 64 channels selectable via the IHD-210 series, so video and audio can be transmitted simultaneously. IGMP snooping is an integral part of IP multicast and a communications protocol used by hosts and adjacent routers on IP networks to establish multicast group memberships. IGMP snooping can be used for one-to-many/many-to-many networking applications such as online streaming video and gaming, and allows exclusive transmission and more efficient use of resources.

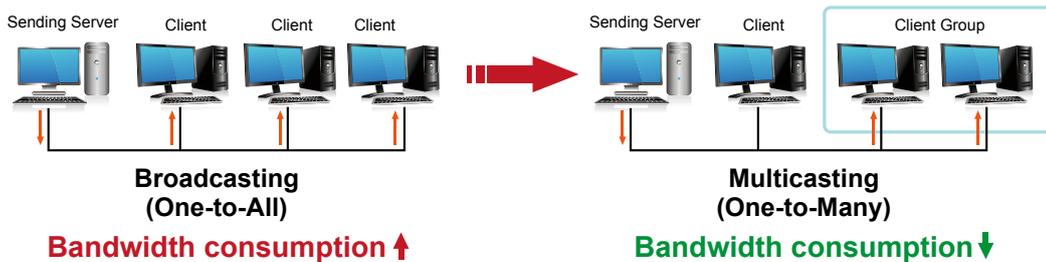


**Extended Display Identification Data (EDID) Support**

The IHD-210 series adopts Automatic EDID (Extended Display Identification Data) Copy function to make smooth video distribution over different types of display units. EDID is greatly important as it contains information about resources' manufacturer names, serial numbers, product types, maximum image sizes, color characteristics, factory pre-set timings, frequency range limits, etc. In some cases, display problems may occur due to incorrect EDID communication between the display monitor and the transmitting unit or inappropriate EDID data programmed by display manufacturers. Therefore, with Automatic EDID Copy function, the IHD-210 series allows the system to copy EDID information from EDID compliant displays and assures accurate display performance.

**Without Extended Display Identification Data**

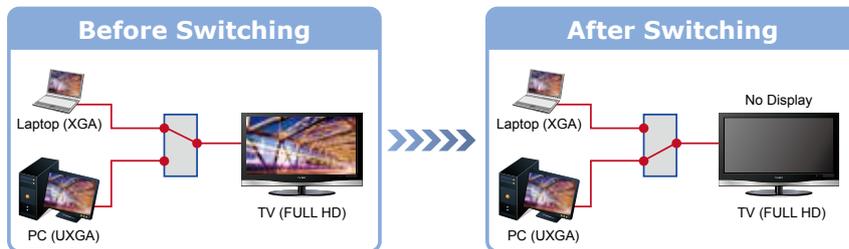


**Supports Extended Display Identification Data**

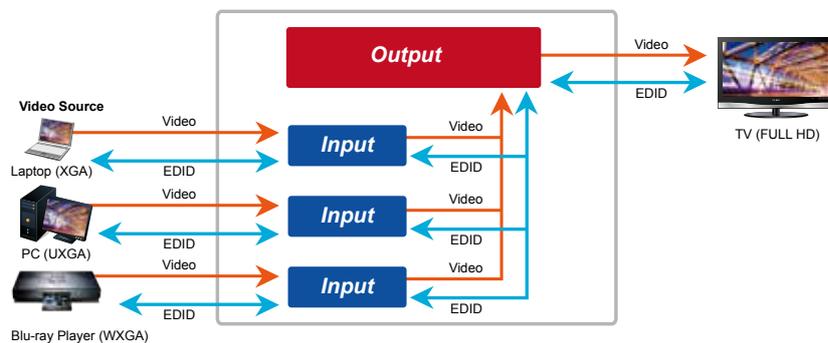

*Video Channel Setting Matches Well through Network Configuration*

The IHD-210 series network can be configured by a central computer over the same LAN within a certain distance. Fully leveraging the mature Ethernet switches with 802.1Q VLAN function, multi-casting can be performed to allow more video sources/senders in the network and be remotely managed. Just adjust and match video channel setting with the simple DIP switch in both the IHD-210PT and IHD-210PR. The video distribution is easily deployed through Plug and Play.

### Network Configuration

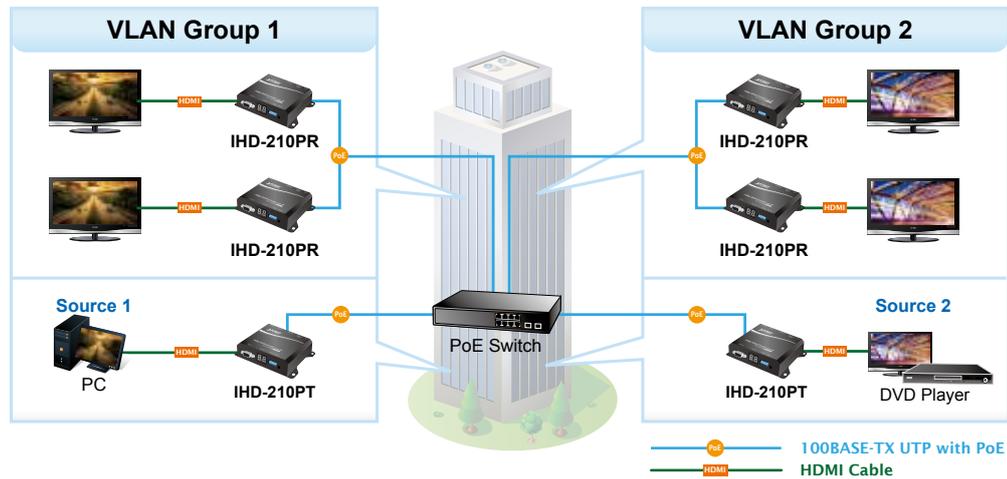

*High-quality Output and Performance*

The IHD-210 series supports Full HD 1080p, HDCP and blu-ray quality, which have been commonly used for applications that require real-time high video resolution and transmission in long distance. It also includes security and noise immunity as well as HDMI with 2-ch uncompressed audio function to offer the superior video distribution.

### Full HD Resolution




## Applications

PLANET IHD-210PT and IHD-210PR work as a pair to facilitate the management tool and HDMI display over IP Ethernet with PoE.

### Video Extender


The IHD-210PT and IHD-210PR are able to send the same video signal to multi-monitors in different locations at the same time. It helps to quickly extend the image and commercial to the public efficiently in such places as expos, food courts, boardrooms, and any public areas.

### Video Extension from One to Many Units

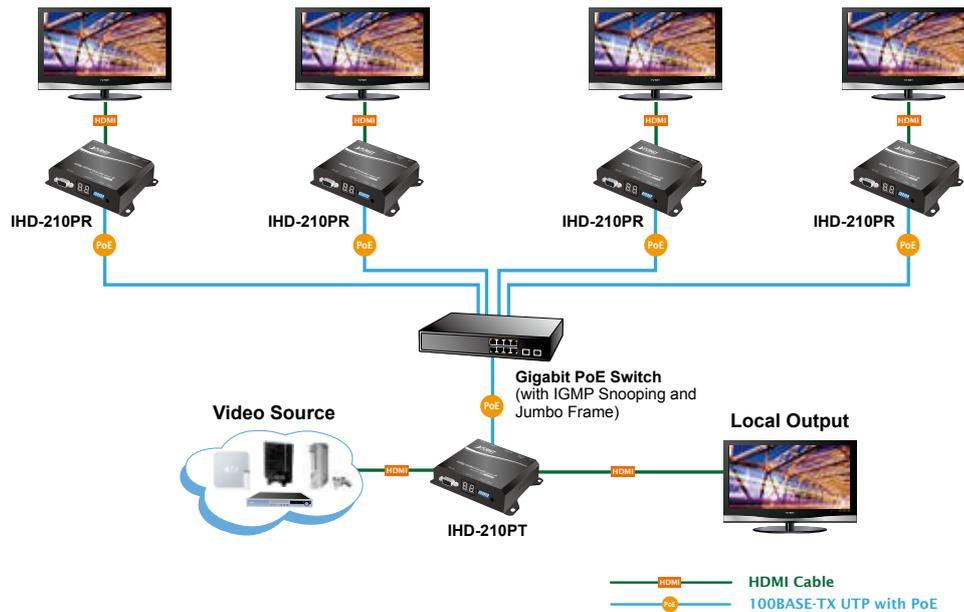


### Efficient Control via Selectable 64-Channel DIP Switch

Where there is more than one transmitter in the video extend system, the DIP switch in the IHD-210PT and IHD-210PR facilitates distinguishing the pair of the transmitter and receiver units in the same channel. It further enables the broadcasting system to perform multiple video extend systems simultaneously through matching of the IHD-210PT and IHD-210PR.

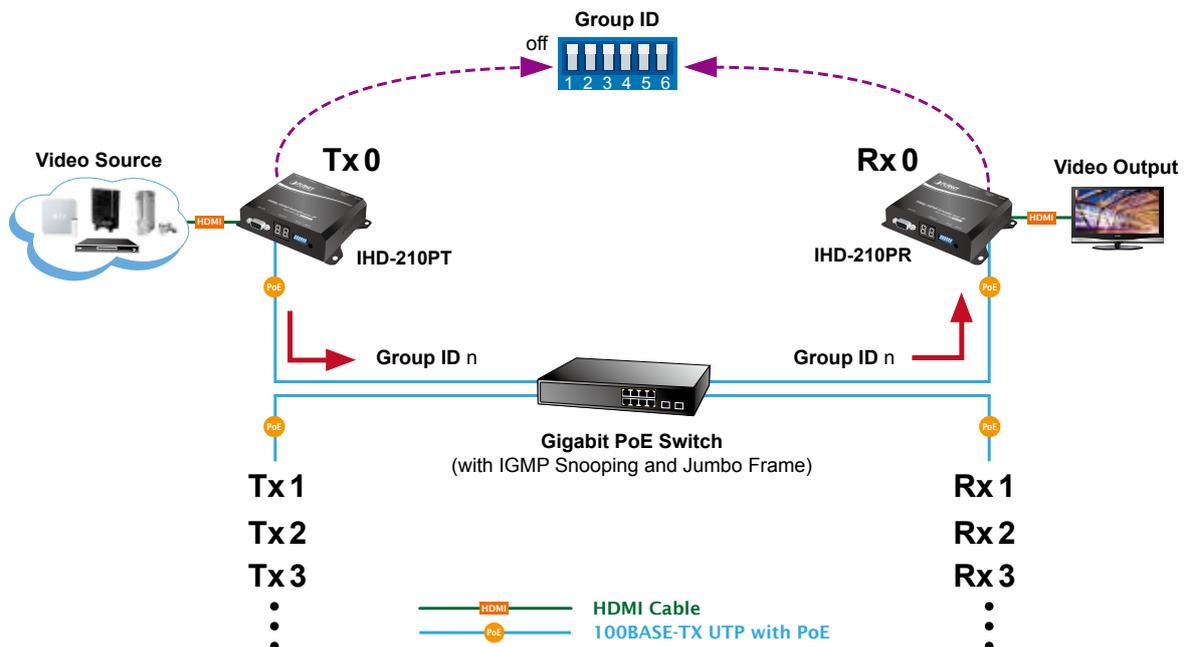

*Ideal Solution for Wide Variety of Commercial Installation Environments*

The IHD-210 series uses the advanced H.264 as the compression type, which makes it occupy lower bandwidth and play the video more smoothly. It supports 100m over single cat5e/6 cable at point to point, as well as point to many and many to many over Ethernet switch. The video extend solution is ideal for live presentations, public broadcasting, education training, boardrooms, etc.

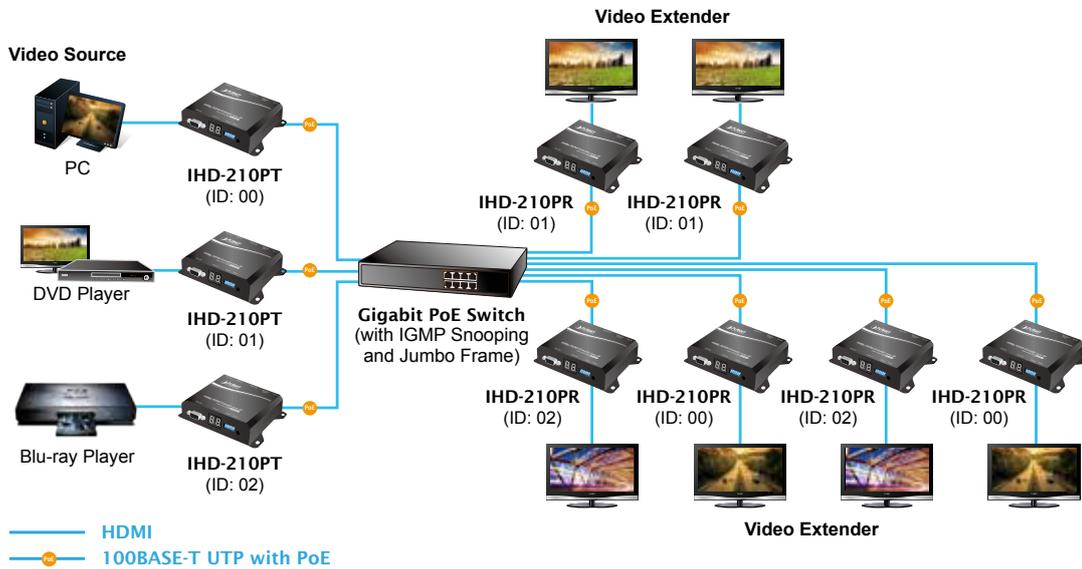

**Video Extender: Many to Many**

## Specifications

| Model  | IHD-210PT   | IHD-210PR   |
|--|---|---|
| <b>Hardware Specifications</b>                 |   |   |
| Network Interface                              | RJ45 port (10/100BASE-TX Ethernet) x 1  |   |
| Serial Interface                               | DB-9 female connector for RS232 x 1   |   |
| LED  | Numerical LED display   |   |
| Buttons  | Reset button x 1  |   |
| Video In Interface                             | HDMI A Type female connector x 1  | N/A   |
| Video Out Interface                            | HDMI A Type female connector x 1  |   |
| IR   | 3.5mm jack for IR emitter cable   | 3.5mm jack for IR receiver cable  |
| Channel Switching                              | DIP (64 channels)   |   |
| Power Supply                                   | IEEE 802.3af/at PoE+<br>5V DC, 2A   |   |
| Power Consumption                              | 7W (each unit)  |   |
| Dimensions (W x D x H)                         | 130 x 82 x 30.25 mm   |   |
| Weight   | 290 g   |   |
| <b>Video and Audio</b>                         |   |   |
| Video In Resolution                            | 1080p @ 60/50 Hz<br>1080p @ 30/25 Hz<br>1080i @ 60/50 Hz<br>720p @ 60/50 Hz<br>480p @ 60/50 Hz<br>480i @ 60/50 Hz | N/A   |
| Video Out Resolution                           | 1080p @ 30/25 Hz<br>1080i @ 60/50 Hz<br>720p @ 60/50 Hz<br>480p @ 60/50 Hz<br>480i @ 60/50 Hz                     |   |
| Compression                                    | H.264 format for video encoder/decoder.<br>MPEG 1 Layer II format for audio encoder/decoder                       |   |
| Audio  | 2-ch uncompressed audio   |   |
| <b>General</b>                                 |   |   |
| Management Interfaces                          | Search Tool   |   |
| System Expandability (max.)                    | 64 groups   |   |
| Resolution Identification                      | EDID (Extended Display Identification Data)   |   |
| Security                                       | HDCP compliant  |   |
| Media Stream Bandwidth (max.)                  | 15Mbps  |   |
| Maximum Distance (between unit and PoE switch) | 100 meters (330 feet) over CAT5e/6 cable  |   |
| <b>Standards Conformance</b>                   |   |   |
| Standards Compliance                           | IEEE 802.3 10BASE-T<br>IEEE 802.3u 100BASE-TX<br>IEEE 802.3af/at PoE+   |   |
| HDMI Interface Compliance                      | HDMI 1.4a   |   |
| Protocol                                       | TCP, UDP, RTSP, RTP, DHCP, IGMP Snooping, Multicast, IPv4   |   |
| Cabling  | Cat5e/6 UTP cable   |   |
| <b>Environment Specifications</b>              |   |   |
| Operating                                      | Temperature: 0~55 degrees C<br>Relative Humidity: 5~90% (non-condensing)  |   |
| Storage  | Temperature: -10~60 degrees C<br>Relative Humidity: 5~90% (non-condensing)  |   |
| Emission                                       | FCC, CE   |   |
| <b>Standard Accessories</b>                    |   |   |
| Packet Contents                                | Media Extender x 1<br>Quick Installation Guide x 1<br>IR Emitter Cable x 1  | Media Extender x 1<br>Quick Installation Guide x 1<br>IR Receiver Cable x 1 |

\*\* Product specifications are subject to change without notice.

## Ordering Information

|           |  |
|-----------|--|
| IHD-210PT | High Definition HDMI Extender Transmitter over IP with PoE |
| IHD-210PR | High Definition HDMI Extender Receiver over IP with PoE    |

## Related Products

|                                |   |
|--------------------------------|---|
| IHD-410PT                      | Video Wall Ultra 4K HDMI/USB Extender Transmitter over IP with PoE                              |
| IHD-410PR                      | Video Wall Ultra 4K HDMI/USB Extender Receiver over IP with PoE                                 |
| NVR-3685                       | H.265 36-Ch Network Video Recorder with 8-Bay Hard Disks  |
| GS-4210-16P4C                  | 16-Port 10/100/1000T 802.3at PoE + 4-Port Gigabit TP/SFP Combo Managed Switch/220W              |
| GS-5220-8P2T2S                 | L2+ 8-Port 10/100/1000T 802.3at PoE + 2-Port 10/100/1000T + 2-Port 100/1000X SFP Managed Switch |
| GS-4210-24P4C / GS-4210-24PL4C | 24-Port 10/100/1000T 802.3at PoE + 4-Port Gigabit TP/SFP Combo Managed Switch                   |

### PLANET Technology Corporation

11F., No.96, Minquan Rd., Xindian Dist., New Taipei City  
231, Taiwan (R.O.C.)

Tel: 886-2-2219-9518

Email: sales@planet.com.tw

Fax: 886-2-2219-9528

www.planet.com.tw



PLANET reserves the right to change specifications without prior notice. All brand names and trademarks are property of their respective owners. Copyright © 2017 PLANET Technology Corp. All rights reserved.

**IHD-210 Series**