CV131A / CV131B

Sun Console Converters

● CV131A is a signal converter specifically designed for SUN systems. They can be used with KVM switches. Both models are easy to install and can be configured via the hotkeys on the keyboard.

CV131B is a signal converter specifically designed for SUN systems. They can be used with KVM switches. Both models are easy to install and can be configured via the hotkeys on the keyboard.
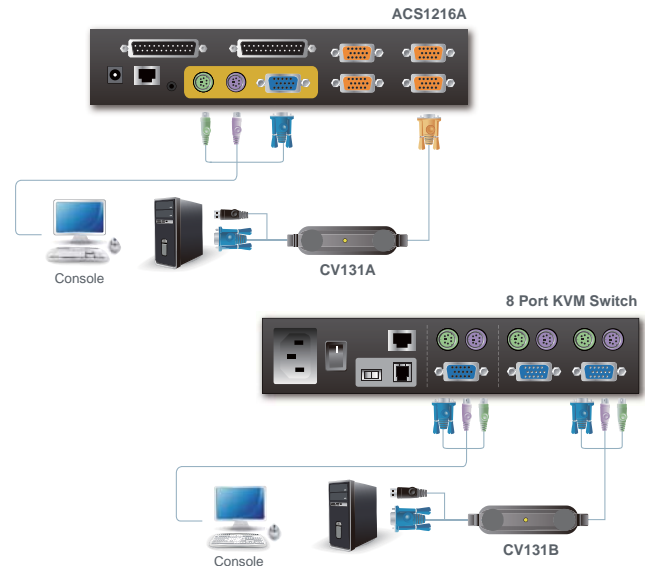

CV131A

CV131B

USB → Sun
USB, Sun Friendly

Non-Powered

ACS1216A

Console — CV131A

8 Port KVM Switch

Console — CV131B

Features

- Compatible with Sun USB systems
- Compatible with ATEN or ALTUSEN SPHD*(CV131A), or PS/2 (CV131B) equipped KVM switches
- Translates PS/2 keyboard, mouse, and VGA signals to Sun USB keyboard, mouse and monitor signals
- High quality molded connectors
- Keyboard language selection via simple hotkeys
- Composite sync video support
- Supports PS/2 mice and Microsoft Intellimouse
- External power adapter not required
- Supports 1600 x 1200, maximum video resolutions including Sun specific:1152 x 900

*Compatible with SPHD PS/2 and Combo products only.

Specification

Function			CV131A	CV131B
Console Connections			1	
Connectors	To Sun	Keyboard/ Mouse	1 x USB Type A Male (Black)	
		Video	1 x HDB-15 Male (Blue)	
	To Switch	Keyboard	1 x SPHD-15 Male (Yellow)	1 x 6-pin Mini-DIN Male (Purple)
		Video		1 x HDB-15 Female (Blue)
		Mouse		1 x 6-pin Mini-DIN Male (Green)
LEDs	Power		1 (Orange)	
Emulation	Keyboard/ Mouse		Sun	
Video			1600 x 1200	
Environment	Operation Temp.		0-50°C	
	Storage Temp.		-20-60°C	
	Humidity		0–80% RH, Non-condensing	
Physical Properties	Housing		Plastic	
	Weight		0.20 kg	0.24 kg
	Cable Length		1.8m	

* The specifications and pictures are subject to change without notice.