

Dual Band 802.11ax 1800Mbps Ceiling-mount Wireless Access Point w/802.3at PoE+ & 2 10/100/1000T LAN Ports



Ultra-high-speed Wi-Fi 6 Wireless LAN Solution

PLANET WDAP-C1800AX **1800Mbps Dual Band 802.11ax Wireless AP**, supporting **MU-MIMO**, **Wave 2.0**, **OFDMA** and **Seamless Roaming technology**, provides a maximum wireless speed of 1200Mbps in the 5GHz band and 600Mbps in the 2.4GHz band. The maximum number of client users is up to 250, ensuring more secure and robust connectivity with the adoption of Wi-Fi 6 technology.



Benefits of MU-MIMO, Wave 2, OFDMA and Seamless Roaming

The WDAP-C1800AX can be installed in public areas such as hotspots, airports and conferences as OFDMA, a multi-user version of OFDM, enables the concurrent AP to communicate (uplink and downlink) with multiple clients by assigning subsets of subcarriers called resource units (RUs) to the individual clients. With MU-MIMO and Seamless Roaming technologies, it provides a better Wi-Fi user experience, reducing the likelihood of users turning off Wi-Fi and putting more load on the cellular network. These technologies also can solve Wi-Fi congestion issues in open work spaces and conference rooms. The WDAP-C1800AX can offer more powerful throughput coverage of up to 250 client users.

Industrial Compliant Wireless LAN

- Compliant with the IEEE 802.11a/b/g/n/ac/ax wireless technology
- Equipped with 10/100/1000Mbps RJ45 ports, and auto MDI/MDI-X

RF Interface Characteristics

- 802.11ax 2T2R architecture with data rate of up to 1800Mbps (600Mbps in 2.4GHz and 1200Mbps in 5GHz)
- High output power with multiply-adjustable transmit power control

Multiple Operation Modes and Wireless Features

- Multiple operation modes: AP, gateway and repeater
- Supports OFDMA (orthogonal frequency division multiple access)
- Supports MU-MIMO (multi-user multiple-input multiple-output), Wave 2.0
- WMM (Wi-Fi multimedia) provides higher priority to multimedia transmitting over wireless
- Coverage threshold to limit the weak signal of clients occupying session
- Real-time Wi-Fi channel analysis chart and client limit control for better performance
- Support Terminal Seamless Roaming with 802.11k, 802.11v, and 802.11r

Secure Network Connection

- Full encryption supported: WPA/WPA2PSK-TKIPAES, WPA3PSK-TKIPAES, WPA2/WPA3PSK-TKIPAES
- Supports 802.1Q VLAN and SSID-to-VLAN mapping
- Supports IP/Port/MAC address/URL filtering, DoS, SPI firewall
- Supports DMZ and port forwarding
- Bandwidth control per IP address to increase network stability


OFDMA (Orthogonal Frequency Division Multiple Access) Benefits

- Helps transmit small and large packets together to reduce bandwidth burden and improve data transmission performance
- Transmitting data at the same time can effectively reduce the transmission delay for longer frame and low-speed transmission.
- Improves the overall traffic quality, and effectively uses bandwidth in an environment where multiple people use the Internet.
- Increases the number of devices that can be connected to the AP.
- Reduces the power consumption of the device by way of the use of low bandwidth.

Easy Deployment and Management

- Supports PLANET AP Controllers in AP mode
- Easy discovery by PLANET Smart Discovery
- Self-healing mechanism through system auto reboot setting
- System status monitoring through remote syslog server
- Gateway mode supports PLANET DDNS/Easy DDNS

A **75%** Reduction in Delays

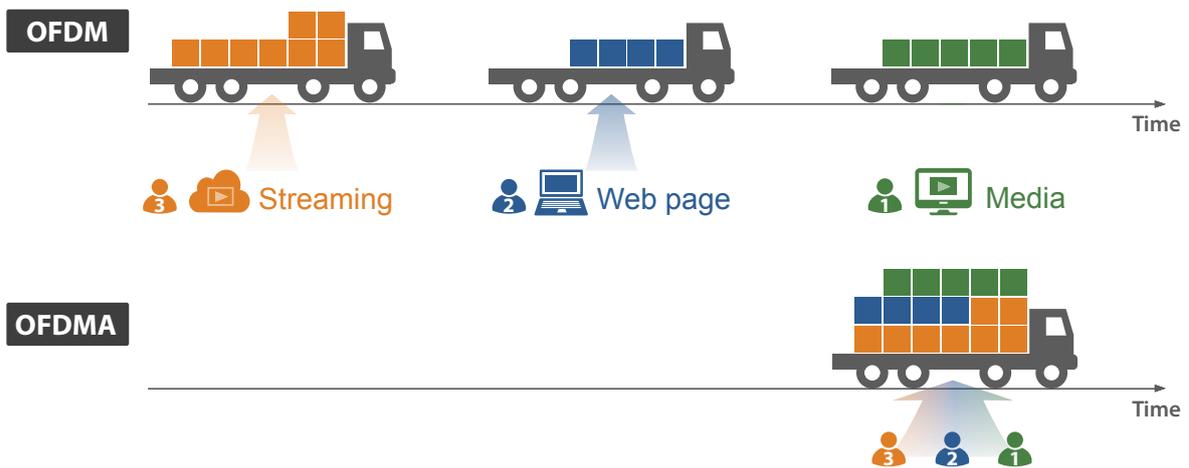


WAVE 1
SU-MIMO

Serving one user at a time



WAVE 2
MU-MIMO


Serving multiple users simultaneously

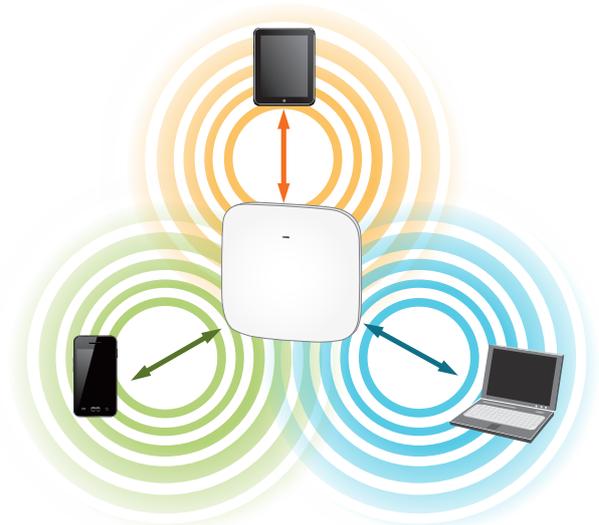

WPA3 Next Generation Security for Your WLAN Solution

WPA3 is the next generation Wi-Fi security technology that provides the most advanced security protocol to the market. WPA3 makes your connection more secure by preventing hackers from easily cracking your password no matter how simplified the password is. WPA3 can also provide more reliable password-based authentication, so it can better protect the security of individual users.


* WDAP-C1800AX only supports WPA3-Personal.

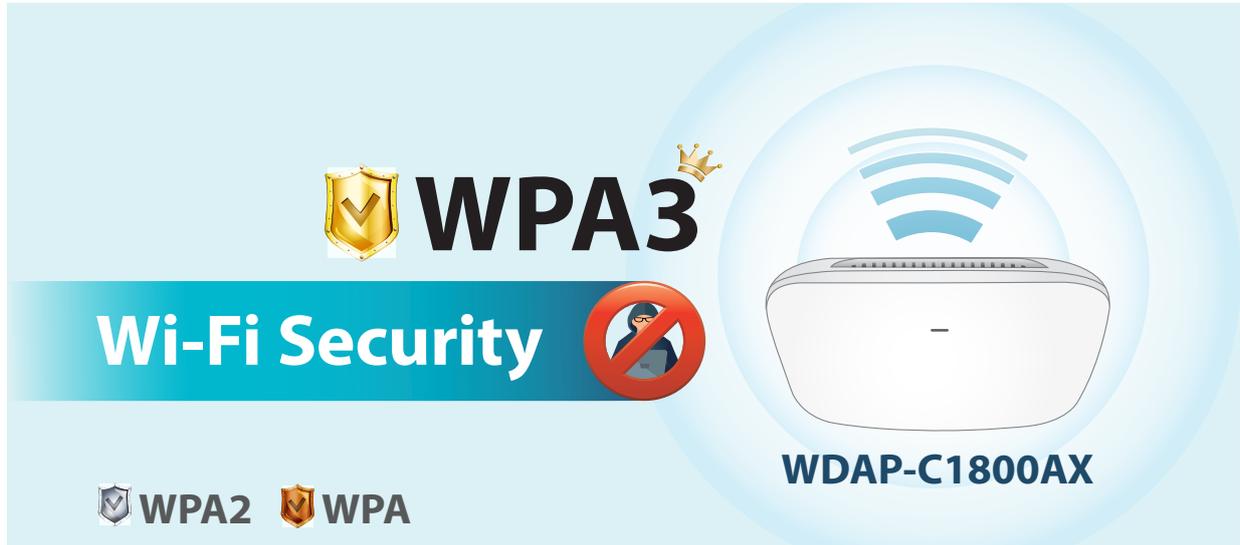

Super Power Dual band WLAN Solution

PLANET WDAP-C1800AX, adopting the IEEE 802.11ax Wi-Fi 6 standard, provides a high-speed transmission. The maximum wireless speed in 2.4GHz band is up to 11AXG_GHE40 of 574Mbps, and in the 5GHz band is up to 11AXA_AHE80 of 1201Mbps. Both the **2.4GHz** and **5GHz** wireless connections can also be used simultaneously. Furthermore, the WDAP-C1800AX adopts the high-class Qualcomm Atheros SoC (System-on-a-Chip), which provides higher stability to meet the stringent requirements of the solution.

Faster Data Rate than That of 11ac by **37%**

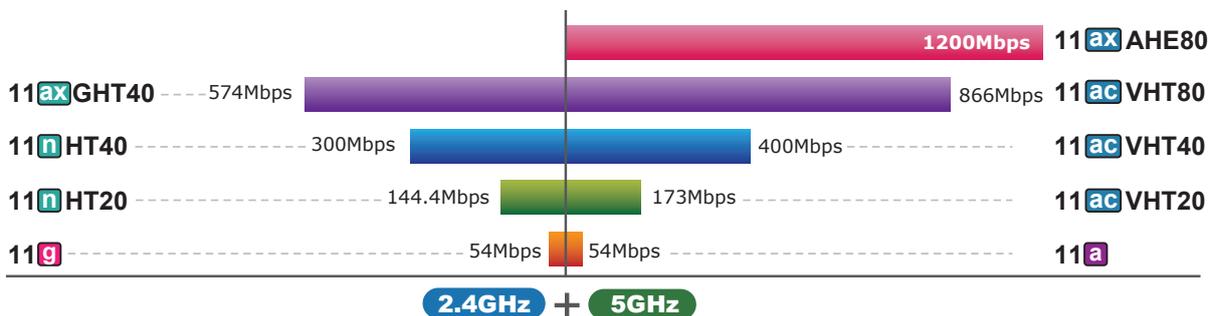


WDAP-C1800AX Data Transmission Rates **1800Mbps**

Advanced Security and Rigorous Authentication

The WDAP-C1800AX supports WPA/WPA2PSK-TKIP/AES, and WPA3PSK-TKIP/AES wireless encryptions, and also supports the WPA2/WPA3PSK-TKIP/AES at the same time, which can effectively prevent eavesdropping by unauthorized users or bandwidth occupied by unauthenticated wireless access. Furthermore, any users are granted or denied access to the wireless LAN network based on the ACL (Access Control List) that the administrator pre-established. For management purposes, the IEEE 802.1Q VLAN supported allows multiple VLAN tags to be mapped to multiple SSIDs to distinguish the wireless access.


Multi-SSIDs + VLAN + Seamless Roaming

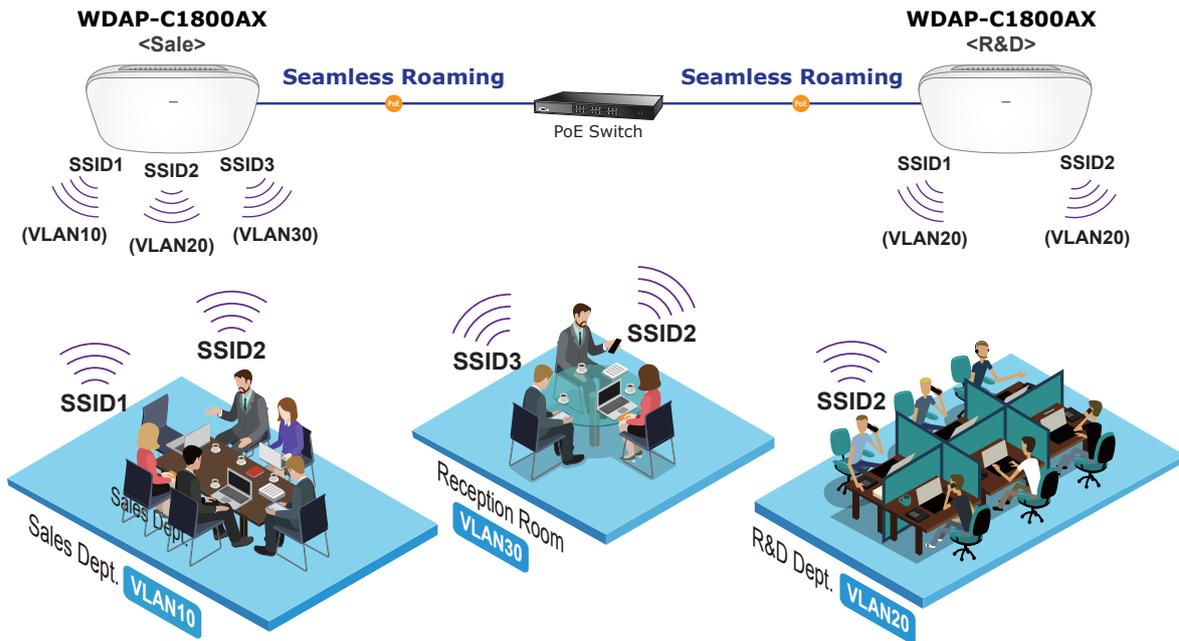

Multiple Operation Modes for Various Applications


The WDAP-C1800AX supports the simplified usage modes of AP, Gateway and Repeater, through which they provide more flexibility for users when wireless network is established. Compared with general wireless access points, the WDAP-C1800AX offers more powerful and flexible capability for wireless clients.

* In repeater mode, WPA3 encryption is not supported.

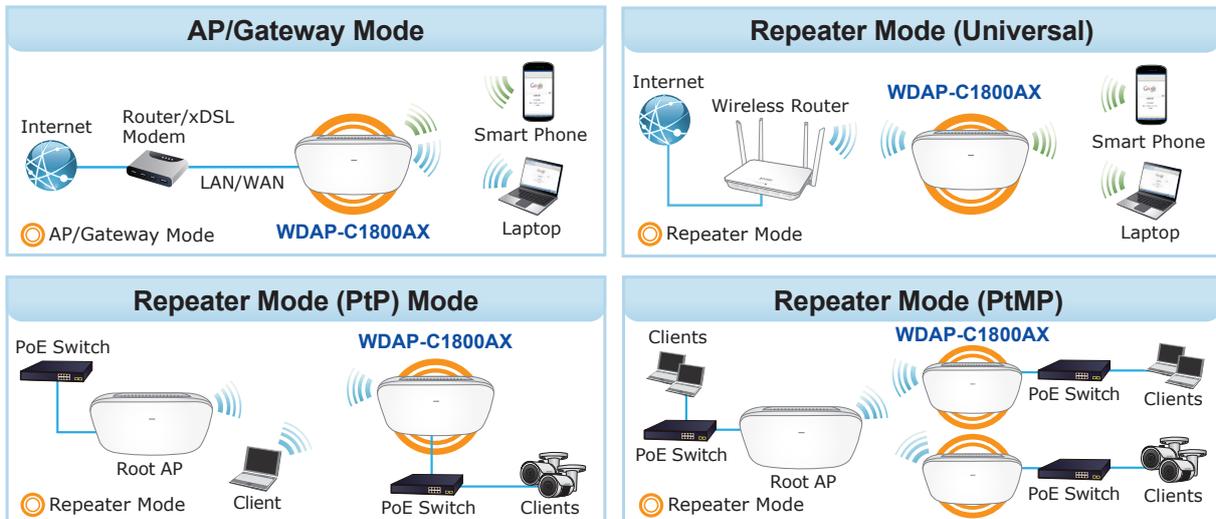

Ceiling-mount Design for Your Environment

With the standard IEEE802.3at Power over Ethernet (PoE) design, the WDAP-C1800AX can be easily installed in the areas where power outlets are not available. By supporting the standard IEEE 802.3at PoE PD power scheme, the WDAP-C1800AX can be powered and networked by a single UTP cable, effectively eliminating the needs of dedicated electrical outlets on the ceiling and reducing the cabling cost. Furthermore, the system administrator is able to arrange the PoE schedule of the WDAP-C1800AX by working with the managed PoE switch.

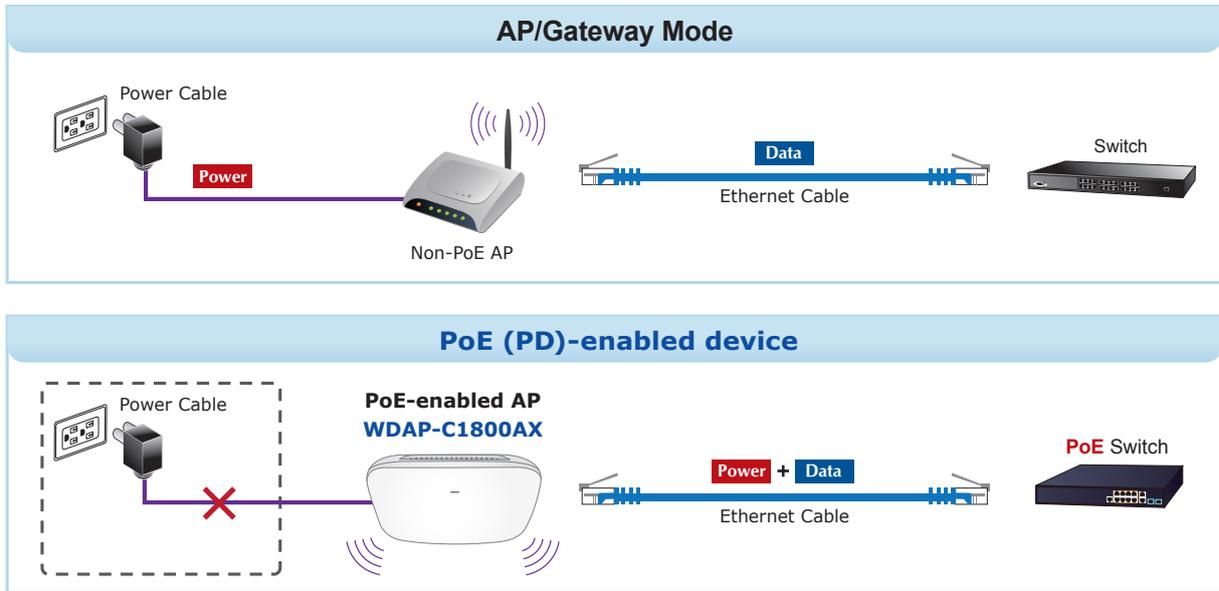

Optimized Efficiency in AP Management

The brand-new GUI configuration wizard helps the system administrator easily set up the WDAP-C1800AX step by step. Besides, the built-in Wi-Fi analyzer provides real-time channel utilization to prevent channel overlapping to assure greater performance. With the automatic transmission power mechanism, distance control and scheduling reboot setting, the WDAP-C1800AX is easy for the administrator to deploy and manage without on-site maintenance.

Setup Wizard for Multiple Modes

Wi-Fi Channel Analyzer


Home Dashboard for Wi-Fi Status



Applications


Extreme High Speed and Wi-Fi 6 Technology Make Wireless Transmission More Powerful

The WDAP-C1800AX delivers the dual band and more bandwidth to avoid signal interference and ensure the best Wi-Fi performance. It allows you to check e-mails and surf the Internet via the 2.4GHz band and simultaneously watch full high-definition (HD) video or any other multimedia application via one 5GHz band. Besides, many client users can be connected to Wi-Fi at the same time. The maximum number of client users is up to 250. Moreover, the Gigabit Ethernet port of the WDAP-C1800AX offers ultra-fast wired connections that utilize the maximum wireless bandwidth; therefore, users will experience a fast wireless speed of over 650Mbps. With the outstanding stability of high-speed wireless transmission, the WDAP-C1800AX can provide users with excellent experience in multimedia streaming with your mobile devices anywhere, anytime.

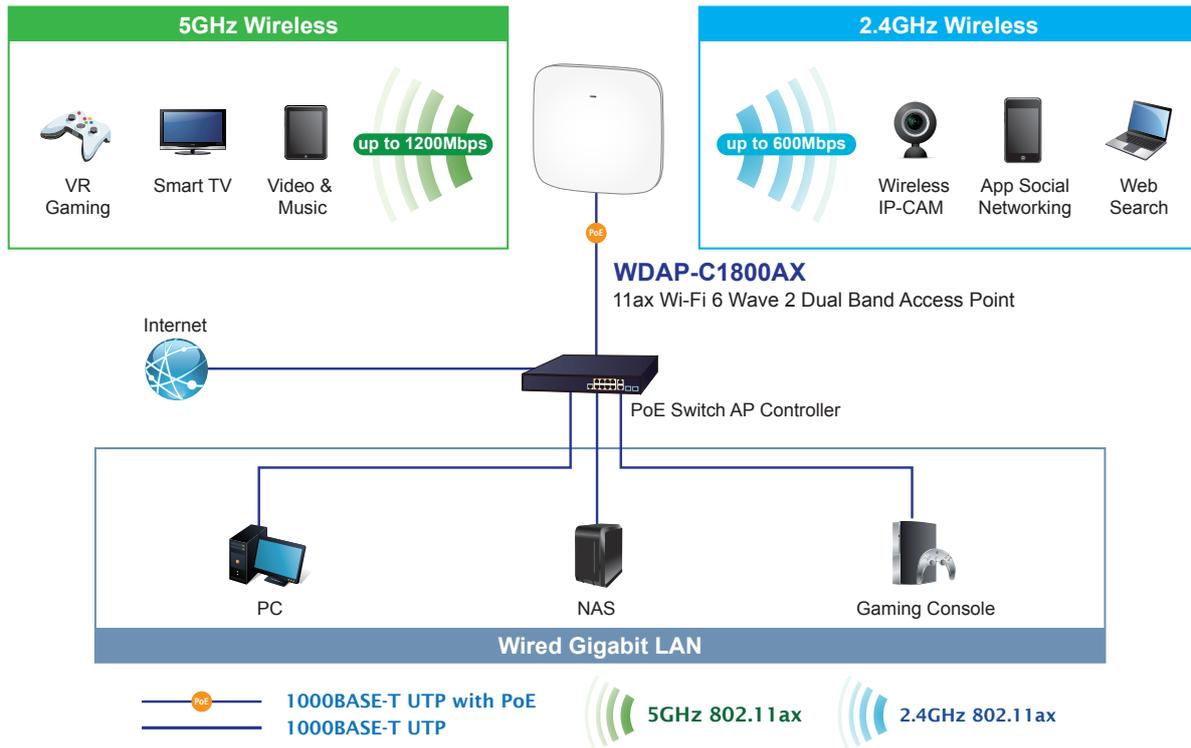

Seamless Roaming and Better Coverage

Moving between a traditional Wi-Fi AP or router and range extender, your Wi-Fi signal can experience lag or a dropped connection. With Seamless Roaming and intuitive technology, moving from room to room is never a problem now that your devices are switched to the strongest Wi-Fi signal automatically. The WDAP-W1800AX features advanced 2T2R MU-MIMO technology which reduces the effect of dead spot, so that it can get better coverage of the existing wireless network. Furthermore, the repeater mode supported by the WDAP-W1800AX helps to minimize the effort of installation, thus reducing cabling cost.

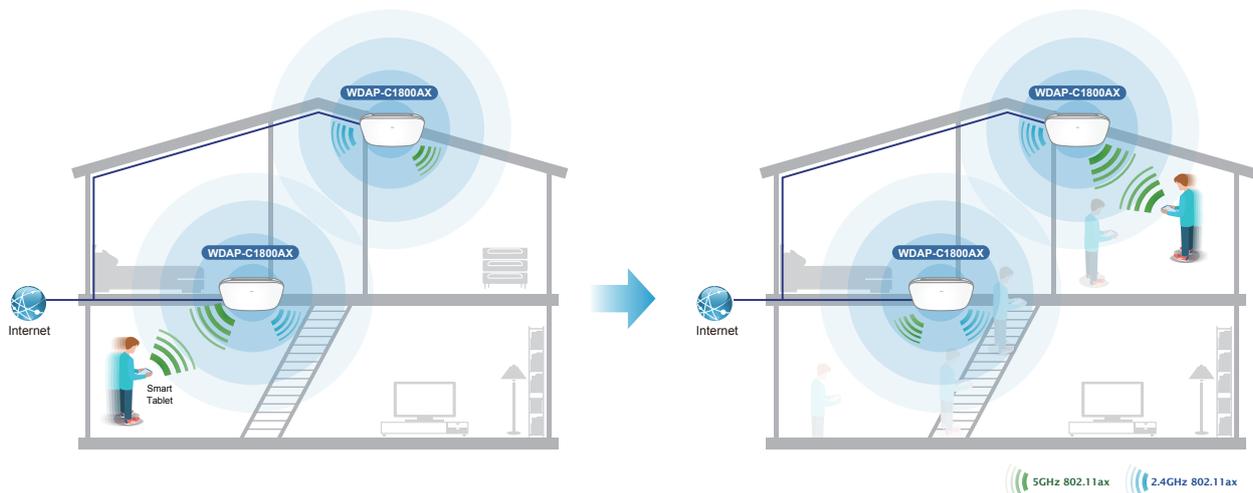

Specifications

Product	WDAP-C1800AX		
Hardware Specifications			
Interfaces	LAN 2 x 10/100/1000BASE-T RJ45 port Auto-negotiation and auto MDI/MDI-X		
Antennas	Gain: 4 x Internal 5dBi antenna (2.4G x2, 5G x2)		
Reset Button	Reset button on the rear side (Press over 5 seconds to reset the device to factory default)		
LED Indicators	Power, SYS		
Dimensions (W x D x H)	186 x 186 x 35.8 mm		
Weight	380 ± 5g		
Power Requirements	48V DC IN, 0.5A, IEEE 802.3at PoE+ or 12V DC IN, 2.0A from DC Jack (5.5 x 2.1mm)		
Power Consumption	< 22W		
Mounting	Ceiling Mount		
Wireless Interface Specifications			
Standard	IEEE 802.11ax IEEE 802.11ac IEEE 802.11n IEEE 802.11a IEEE 802.11b IEEE 802.11g IEEE 802.11i IEEE 802.3 10BASE-T IEEE 802.3u 100BASE-TX IEEE 802.3ab 1000BASE-T IEEE 802.3x flow control IEEE 802.11k, 802.11v, and 802.11r		
Media Access Control	CSMA/CA		
Data Modulation	802.11ax: MIMO-OFDMA (BPSK / QPSK / 16QAM / 64QAM / 256QAM, 1024QAM) 802.11ac: MIMO-OFDM (BPSK / QPSK / 16QAM / 64QAM / 256QAM) 802.11a/g/n: OFDM (BPSK / QPSK / 16QAM / 64QAM) 802.11b: DSSS (DBPSK / DQPSK / CCK)		
Band Mode	2.4G / 5G concurrent mode		
Frequency Range	2.4GHz: FCC: 2.412~2.462GHz ETSI: 2.412~2.472GHz 5GHz: FCC: 5.180~5.240GHz, 5.745~5.825GHz ETSI: 5.180~5.700GHz		
Operating Channels	FCC: 36, 40, 44, 48, 52,54,60,64,149, 153, 157, 161, 165 (9 Channels) ETSI: 36, 40, 44, 48, 52,54,60,64,100, 104, 108, 112, 116, 132, 136, 140 (12 Channels) 5GHz channel list may vary in different countries according to their regulations.		
Max. Transmit Power (dBm)	FCC: up to 20 ± 1dBm ETSI: < 19dBm (EIRP)		
Receive Sensitivity	Network Mode	Data Rate	Receive Sensitivity (dBm)
	2.4GHz		
	802.11b	1Mbps	-98
		11Mbps	-90
	802.11g	6Mbps	-93
		54Mbps	-77
	802.11n HT20	MCS0	-92
		MCS7	-72
	802.11n HT40	MCS0	-90
		MCS7	-70
	802.11ax HT20	MCS0	-93
MCS11		-63	
802.11ax HT40	MCS0	-91	
	MCS11	-60	

	Network Mode	Data Rate	Receive Sensitivity (dBm)
Receive Sensitivity	5GHz		
	802.11a	6Mbps	-95
		54Mbps	-77
	802.11n HT20	MCS0	-93
		MCS7	-75
	802.11n HT40	MCS0	-91
		MCS7	-72
	802.11ac HT20	MCS0	-93
		MCS7	-74
	802.11ac HT40	MCS0	-91
		MCS7	-72
	802.11ac HT80	MCS0	-88
		MCS9	-62
	802.11ax HT20	MCS0	-93
		MCS11	-63
	802.11ax HT40	MCS0	-90
MCS11		-60	
802.11ax HT80	MCS0	-87	
	MCS11	-56	

Software Features

LAN	Static IP / Dynamic IP Supports IP MAC binding
WAN	Static IP Dynamic IP PPPoE
Wireless Mode	Access Point Gateway Repeater
Channel Width	20MHz, 40MHz, 80MHz
Encryption Security	WPA/WPA2PSK-TKIPAES, WPA3PSK-TKIPAES, WPA2/WPA3PSK-TKIPAES
Wireless Security	Enable/Disable SSID Broadcast Wireless Max. 32 MAC address filtering User Isolation
Max. SSIDs	8 (4 per radio)
Max. Clients	250 per radio (200 is suggested, depending on usage)
Wireless QoS	Supports Wi-Fi Multimedia (WMM)
Wireless Advanced	Auto Channel Selection 5-level Transmit Power Control Max (100%), Efficient (75%), Enhanced (50%), Standard (25%) or Min (12.5%) Client Limit Control, Coverage Threshold Wi-Fi channel analysis chart Seamless Roaming
Status Monitoring	Device status, wireless client List PLANET Smart Discovery DHCP client table System Log supports remote syslog server
VLAN	IEEE 802.1Q VLAN (VID: 1~4094) SSID-to-VLAN mapping to up to 4 SSIDs
Self-healing	Supports auto reboot settings per day/hour
Management	Remote management through PLANET DDNS/ Easy DDNS Configuration backup and restore Supports UPnP Supports IGMP Proxy Supports PPTP/L2TP/IPSec VPN Pass-through
Central Management*	Applicable controllers: NMS-500, NMS-1000V, PLANET CloudViewer

*Remarks: The feature will be supported through firmware/system upgrade.

Environment & Certification

Temperature	Operating: 0 ~ 55 degrees C Storage: -40 ~ 70 degrees C
Humidity	Operating: 10 ~ 90% (non-condensing) Storage: 5 ~ 90% (non-condensing)
Regulatory	CE, RoHS

Ordering Information

WDAP-C1800AX	Dual Band 802.11ax 1800Mbps Ceiling-mount Wireless Access Point w/802.3at PoE+ and 2 10/100/1000T LAN Ports
--------------	---

Related Wireless Products

WDAP-C7210E	1200Mbps 802.11ac Wave 2 Dual Band Ceiling-mount Wireless Access Point w/802.3at PoE+ and 2 10/100/1000T LAN Ports
WDAP-W1200E	Dual Band 802.11ac 1200Mbps Wave 2 In-wall Wireless Access Point (EU Type, 802.3at PoE, 3 x 10/100/1000T LAN Ports, 1 x RJ11 Port)
WDAP-850AC	Dual Band 802.11ac 1200Mbps Wave 2 Outdoor Wireless AP (IP67, 802.3at PoE+, 4 x N-type connectors)
NMS-500	Enterprise-class Universal Network Management Controller - 500 nodes, 5 10/100/1000T LAN Ports
NMS-1000V-12	Universal Network Management Controller with 12" LCD Touch Screen -- 1024 Nodes, 2 10/100/1000T LAN Ports
NMS-1000V-10	Universal Network Management Controller with 10" LCD Touch Screen -- 1024 Nodes, 2 10/100/1000T LAN Ports