


Operation manual

Pen type visual fault detector

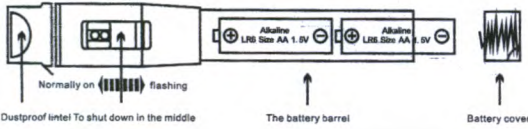


1. In accordance with the correct arrangement of the battery, battery installation errors may cause the device can not work properly, or even damage.
2. Lit up the toggle switch, toggle flashing down. Stay in the middle of the instrument

Product quality assurance card

Product Name: pen type visual fault detector

Inspector: .....



Quality assurance responsibility

Article 1. all belong to the normal conditions of use, due to the product itself quality problems caused by hardware or software failures, within the scope of warranty, can be returned to the manufacturer or authorized service center, the company will be responsible for free repair

Second, belonging to the following products, can not give free maintenance

1. More than the warranty period
2. According to the instructions to use, maintenance and custody
3. Disposable battery box belongs to consumables normal wear and tear.
4. Transport caused by improper maintenance.
5. Without the license dismantling instrument or even transformed.
6. Accident, force majeure.

Technical parameters

P/N 40331 Rev. 2004

Model suffix	-1	-10	-15	-20	-30
Output optical power	> 1mW	> 10mW	> 15mW	> 20mW	> 30mW
Output wavelength	650nm				
Fiber optic adapter	Universal connector				
Use temperature	0~+60°C				
Storage temperature	-20~+70°C				
Battery type	5 alkaline batteries Section 2				
Battery life	> 40 hours	> 12 hours	> 12 hours	> 10 hours	> 10 hours
Appearance	175mm*26mm*26mm				
Weight	173g				