

# TSW210

UNMANAGED INDUSTRIAL SWITCH



## 7-57 V

Wide range of supported power supply voltages

## SFP

2 x SFP ports for long-range fiberoptic communication

## MOUNTING

DIN rail and surface mounting options

## POWER SUPPLY

2-pin industrial DC power socket

## DURABILITY

Rugged aluminum housing for industrial settings

## ETHERNET

8 x Gigabit Ethernet ports with speeds of up to 1000 Mbps

### TSW210

## PRODUCT DESCRIPTION

// The TSW210 is an unmanaged industrial switch for centralizing your resources.

// Equipped with 2 SFP ports for long-range fiberoptic communication and 8 Gigabit Ethernet ports with of up to 1000 Mbps download/upload speed.


// Durable, rugged aluminum housing with DIN rail and surface mounting options make the TSW210 perfect for industrial settings.

// 2-pin industrial DC power socket with an input voltage range of 7-57 VDC.



### FRONT VIEW

### BACK VIEW

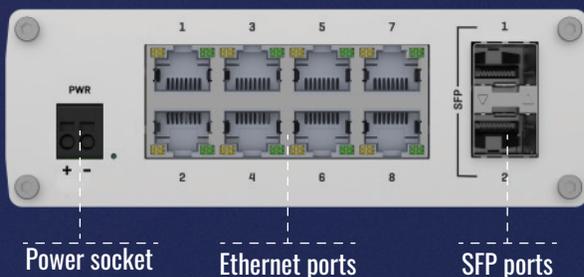

# KEY FEATURES

## HARDWARE

Power connector	2-pin industrial DC power socket
Input voltage range	7-57 VDC
Power consumption	Idle: 1.03 W, Max: 3.71W
Ethernet	8 x 10/100/1000 Mbps Ethernet ports
SFP	2 x SFP ports for Optical interfaces
Status LEDs	16 x Ethernet, 1 x Power, 2 x SFP activity
Ingress protection rating	IP30
Operating temperature	-40 °C to 75 °C
Housing	Aluminum housing with wall or DIN rail mounting options and grounding capability
Dimensions	132 x 44.2 x 95.1 mm
Weight	500 g
Installation	Desktop, wall or DIN rail mountable (additional kit needed)

## PERFORMANCE SPECIFICATIONS

Bandwidth	20 Gbps
Packet buffer	128 KB
Jumbo frame support	9216 bytes
MAC address table size	2K entries
Auto MDI/MDI-X Cable Detection	Yes

## SOCIAL

