

2-Port 4K DisplayPort USB-C Cable KVM Switch (with Remote Port Selector)


US3312

ATEN US3312 2-Port 4K DisplayPort USB-C Cable KVM Switch (with Remote Port Selector) is developed for easy control and fast switch between two USB-C device sources from a single set of keyboard, mouse, and monitor. With cables coming already mounted on to it, the USB bus-powered US3312 supports two USB and one DisplayPort downstream ports, along with USB peripheral sharing capability. Containing a hook and an external remote port selector, the switch box can be placed anywhere to keep the workstation tidy while allowing users to instantly swap peripherals between the connected PCs and ensuring uninterrupted data transmission from a single user station. It supports resolutions up to True 4K (4096 x 2160 @ 60 Hz) to ensure that every detail of the video is displayed in the crisp and sharp UHD quality. The US3312 is a plug-and-play device that not only enhances the efficiency of multi-tasking, but also saves desktop space.



Features

- One KVM switch allows for easy control and fast switch between two USB-C devices from a single set of keyboard, mouse, and monitor
- Superior video quality — up to 4096 x 2160 @ 60 Hz (4:4:4)
- Instant computer selection via remote port selector
- LED indicators will light to display port focus
- Supports two USB and one DisplayPort downstream ports for USB peripheral sharing
- DisplayPort 1.2 compliant
- Bus-powered — no external power adapter or driver needed
- Supports USB hot-plugging
- Compact enclosure with hook design for space-saving and organized workstation

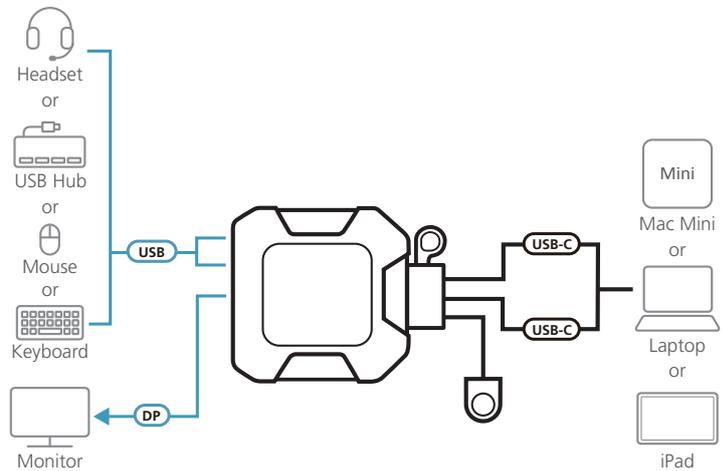

Specifications

	US3312
Computer Connections	2
Port Selection	Remote Port Selector
Connectors	
Console Ports	1 x DisplayPort Female 2 x USB Type-A Female
KVM (Computer) Ports	CPU1: 1 x USB Type-C Male CPU2: 1 x USB Type-C Male
LEDs	
KVM Port (On Line / Selected)	2 (White)
Cable Length	
KVM	2 x 1.2 m
Remote Port Selector	1.8 m
Emulation	
Keyboard / Mouse	N/A
Video	4096 x 2160 @ 60 Hz
Power Consumption	DC5V:0.74W
Environmental	
Operating Temperature	0 - 50 °C
Storage Temperature	-20 - 60 °C
Humidity	0 - 80 % RH, Non-condensing
Physical Properties	
Housing	Plastic
Weight	0.19 kg
Dimensions (L x W x H)	8.34 x 8.42 x 2.99 cm

ATEN International Co., Ltd.

3F., No.125, Sec. 2, Datung Rd., Sijhih District., New Taipei City 221, Taiwan
 Phone: 886-2-8692-6789 Fax: 886-2-8692-6767
 www.aten.com E-mail: marketing@aten.com

Product information is subject to change without prior notice.

Released: 10/2022 V2.0

© Copyright 2022 ATEN® International Co. Ltd.
 ATEN and the ATEN logo are registered trademarks of ATEN International Co., Ltd.
 All rights reserved. All other trademarks are the property of their respective owners.

