
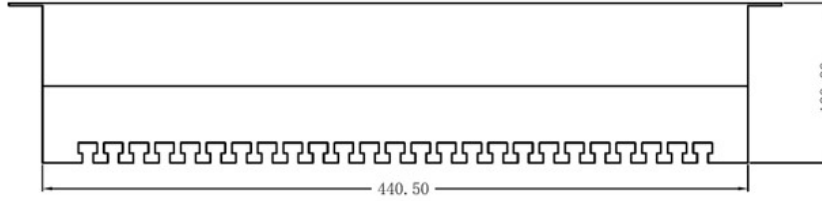


BN-PP-6A24S

19" 1U 24-port CAT6A STP Patch Panel

beek

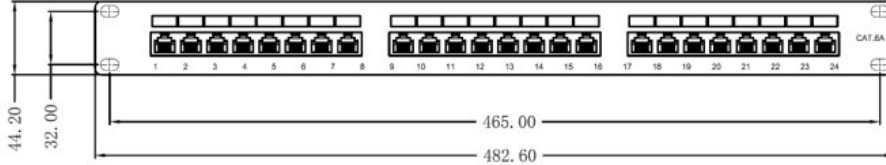

- 19" 1U CAT6A Shielded IDC patch panel with 24-ports
- Suitable for 483 mm (19") cabinet mounting
- Transmission properties: Category 6A, Class Ea
- Area of application: Up to 500 MHz, 10GBase-T
- Connectors: RJ45 female, 8P8C
- Cable installation via LSA strips, color coded according to EIA/TIA 568 A & B
- 360° shield coverage
- RJ45 female material: ABS
- RJ45 female contact: Tinned phosphor bronze, gold-plated contact
- RJ45 shielding: Tinned bronze
- LSA termination clamp: Krone LSA+, zinc plated phosphor bronze
- Conductor plate: FR4
- Insertion force: 30N max.
- Operation temperature: -20° C to +70 °C
- Mating cycles female: 750x min.
- Clamp: 200x min.
- IDC wire size: 22 – 26 AWG solid and stranded conductor
- Insulation resistance: > 500 MΩ
- Contact resistance: < 20 mΩ
- Dielectric strength: 1000 VDC (Contact/Contact), 1500 VDC (Contact/Ground)
- With labeling fields
- Powder-coated steel frame, Black color
- Mounting accessories included (cable ties, screw, nut)
- RoHS and REACH compliant