

HDMI Audio Converter User Manual

Special Notification

Before using this product, please read this manual carefully. Please keep this manual for future reference. The company may change the fuction of product without notice.

Introduction

HDMI audio decoding converter has the HDMI signal input all the way, all the way into the HDMI signal sound channel audio output, and 2.1 and 5.1 is also supported EDID stored and compatible HDCP, support the highest resolution 4 kx2k @ 30 hz input and output, support 3 d video formats, and support the ARC audio back function, the TV with the function of the ARC HDMI interface on the TV via HDMI audio decoder on the high quality back to the home theater audio power amplifier, in order to get the best sound.



Features

- HDMI-----HDMI1.4
- HDCP-----HDCP1.4
- Data rate -----340MHz
- Supports deep color -----24-bit
- Suport resolution-----up to 4Kx2K@30Hz
- Supports one channel ARC function on HDMI
- Support 3D video format
- Support CEC

(To prevail in kind)


- Audio Out
- SPDIF audio out -----DTS-HD&Dolby True HD
 - Coaxial out -----DTS-HD&Dolby True HD
 - Analog out-----Analog stereo
 - Power adapter specification -----AC(50/60Hz) 100V~240Vin, DC5V/1A out
 - Maximum working current -----300MA
 - Working temperature -----0~40°C
 - Working humidity range-----5~85%RH(No condensation)

Panel Description

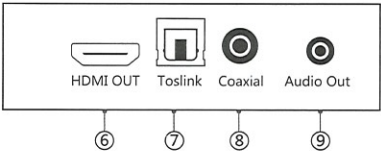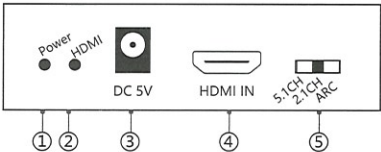

- ① Power indicator light
- ② Signal indicator light
- ③ Power input
- ④ HDMI input
- ⑤ Audio switch
- ⑥ HDMI out put
- ⑦ Toslink audio output
- ⑧ SPDIF audio output
- ⑨ 3.5mm Analog audio output

Connection Diagram

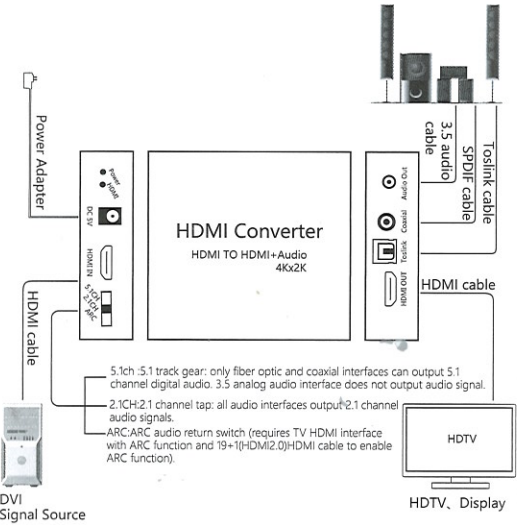

Packing List

NO.	Parts	Qty
1	Product host	1
2	DC5V-Power adapter	1
3	User Manual、Guarantee card	1

The matters needing attention of installation

In order to ensure the reliable performance of the equipment and the safety of the user, please observe the following matters during the process of installation, use and maintenance.

- Please do not use this product in the following places: the place of dust, soot and electric conductivity dust, corrosive gas, combustible gas; the place exposed to high temperature, condensation, wind and rain; the occasion of vibration and impact. Electric shock, fire, wrong operation can lead to damage and deterioration to the product, either;
- Should avoid wiring and inserting cable plug in charged state, otherwise it is easy to cause the shock, or electrical damage;
- The installation and wiring should be strong and reliable, contact undesirable may lead to false action;
- This product grounds by the grounding wires. To avoid electric shocks, grounding wires and the earth must be linked together. Before the connection of input or output terminal, please make sure this product is correctly grounded;
- Only after cutting down all external power source, can install, wiring operation begin, or it may cause electric shock or equipment damage;
- Please do not dismantle the equipment, avoid damaging the internal electrical component.