

Consolidation-Point Boxes for DIGITUS® Keystone Modules





Abstract

Consolidation-Point Boxes for DIGITUS® Keystone Modules, 1-port, 2-port or 6-port

Features

- Capacity of DIGITUS® Keystone Modules when feeding the cables from the back: max.6 modules
- Suitable for all DIGITUS® Keystone Modules
- Available as 1-port, 2-port or 6-port version
- Lower housing shell with an opening for cable entry and mounting holes for wall mounting
- Consisting of: 1x housing shell top, 1x housing shell bottom
 or 2x (AT-AG 302A-WH) Keystone openings, 1x adapter plate for cable entry
- Color: Pure white
- Material: ABS
- Dimensions: (HxWxD): 30x30x50 mm (DN-93731); (HxWxD): 40x170x120 mm (DN-93705); 30x50x50 mm (AT-AG 302A-WH)
- Weights: ca. 25 g (DN-93731);ca. 170 g (DN-93705); ca. 30 g (AT-AG 302A-WH)
- Temperature range: -10 °C up to +50 °C

Product Overview

The box is a part of the DIGITUS® modular connection system and is used for installation of consolidation points

at desks, in intermediate ceilings or in underfloor systems. The housing is suitable for DIGITUS® Keystone Modules.


Product Number Information


DN-93731 Consolidation-Point Box for 1x Keystone Module, color RAL 9010, 1-port
AT-AG 302A-WH Consolidation-Point Box for 2x Keystone Module, color RAL 9010, 2-port
DN-93705 Consolidation-Point Box for 6x Keystone Module, color RAL 9010, 6-port



Technical Drawings

DN-93731

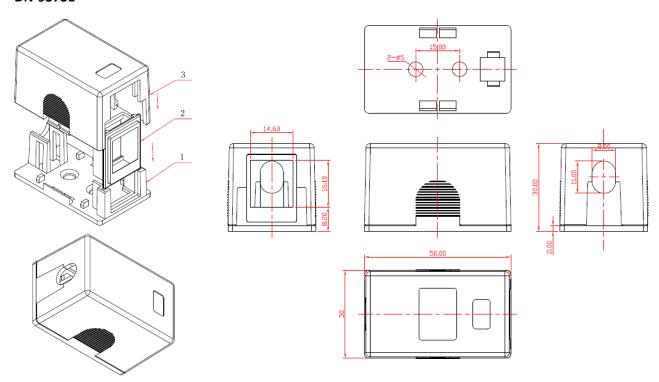

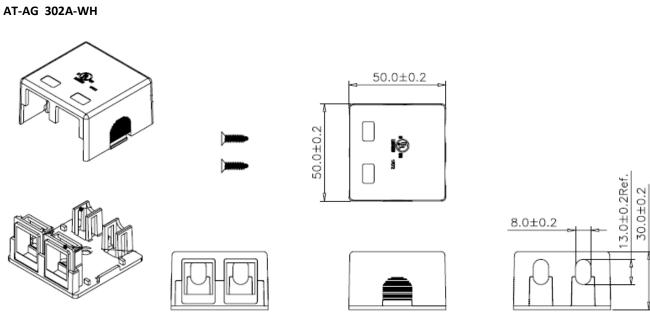



DN-93705

