REVISION RECORD MODIFICATIONS	DATE	REV.
NEW	2020/01/07	A/0

REACH&RoHS Compliant

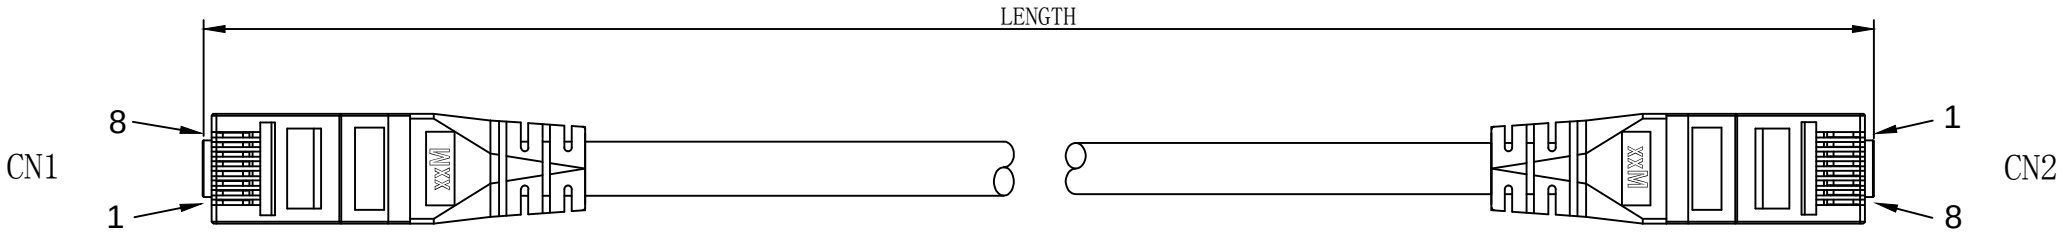

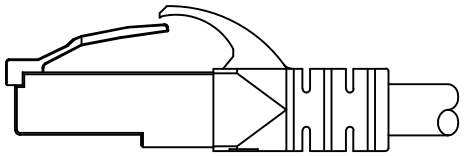

WIRING DIAGRAM

CN1(568B)		CN2(568B)
WHITE	1 — 1	WHITE
ORANGE	2 — 2	ORANGE
WHITE	3 — 3	WHITE
GREEN	6 — 6	GREEN
BLUE	4 — 4	BLUE
WHITE	5 — 5	WHITE
WHITE	7 — 7	WHITE
BROWN	8 — 8	BROWN
SHELL	BRAID	SHELL

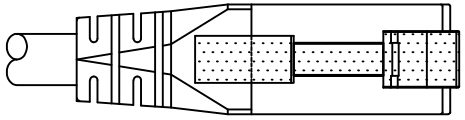

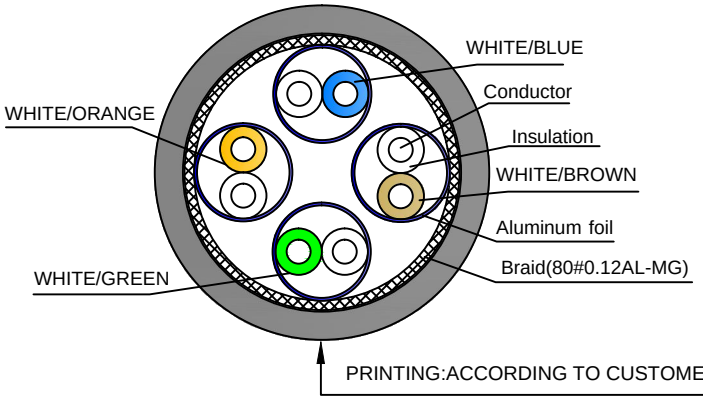



LENGTH	
0.15m+/-10mm	7.5m+/-75mm
0.25m+/-10mm	10m+/-100mm
0.5m+/-10mm	15m+/-150mm
1.0m+/-10mm	20m+/-200mm
1.5m+/-15mm	25m+/-250mm
2.0m+/-20mm	30m+/-300mm
3.0m+/-30mm	40m+/-400mm
5.0m+/-50mm	50m+/-500mm

DESCRIPTIONS:

. CABLE:CAT 6 S/FTP STRANDED WIRES AWG28
. WIRES:BC AWG28 (7/0.125Ñ0.008MM) x 4 TWISTED PAIRS
. PLUG:RJ45 8P8C 3U" GOLD-PLATED ON CONTACT AREA TRANSPARENT COLOR
. MOLDING:PVC MOLDING COLOR :ACCORDING TO CUSTOMER REQUIREMENTS
. CABLE JACKET:PVC,ACCORDING TO CUSTOMER REQUIREMENTS OD:5.8Ñ0.30MM
. WIRES CONNECTION BASE ON TIA/EIA 568B
. TEST STANDARD ACC TO ISO/IEC 11801 CAT.6 CLASS E CHANNEL LINK
. PACKING: ACCORDING TO CUSTOMER REQUIREMENTS
. CABLE LENGTH: ***** METERS

DRAW NO.		PRODUCT NAME	Cat6 S/FTP 8P8C/M TO 8P8C/M	
CUSTOMER		VIEW	Tolerance	
ITEM NO.	S/FTP CAT6 28AWG		X. ±1.00	
			X.X ±0.50	
APPOBY	CHECKBY	DRAWNBY	UNTT	MM
			Page	1 of 1

NO.	PARTS NAME	SPECIFICATION DESCRIPTION	QT'Y	REMARK