



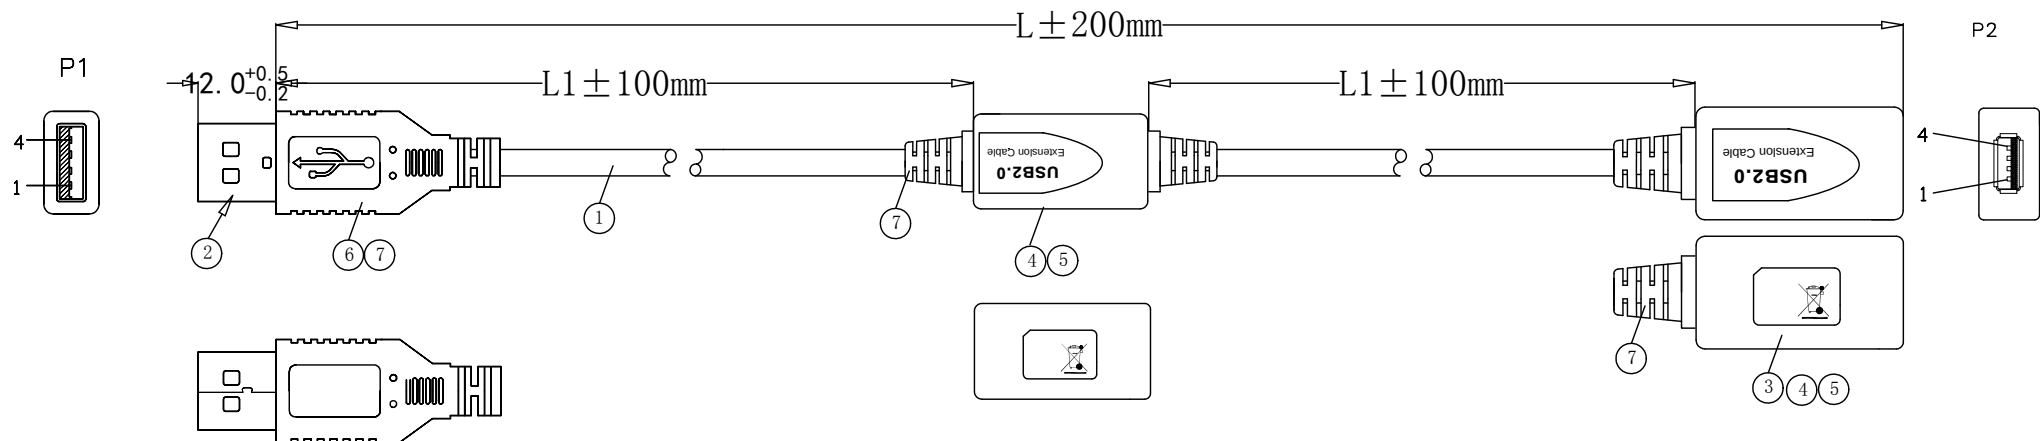

P/N	L/(mm)	L1/(mm)
BA-USB2-EXT-10-1	10000	5000
BA-USB2-EXT-15-1	15000	7500

NOTES:

1. Read & Write speed more than 48MB/S with SSD disk.
2. RoHS & REACH COMPLIANT

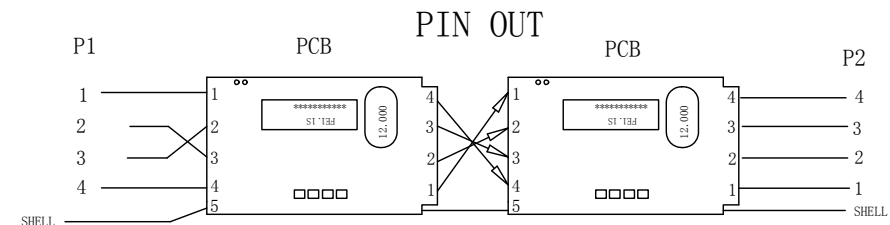

⑦	MOLDED	45P BLACK PVC		G
⑥	MOLDED	LDPE		G
⑤	PLASTIC HOOD	USB2.0 AF PLASTIC HOOD/BLACK	2	PCS
④	PCBA	PCB-FE1.1S	2	PCS
③	CONNECTOR	USB A FEMALE, GOLD PLATED PIN, WHITE INSULATION, NICKEL PLATED SHELL	1	PCS
②	CONNECTOR	USB A MALE, GOLD PLATED PIN, WHITE INSULATION, NICKEL PLATED SHELL	1	PCS
①	CABLE	7/0.127TC*1P+7/0.2TC*2C+ADB, BLACK PVC JACKET, OD: 4.5 ± 0.2mm MARKING: E***** 兄 AWM 2725 80°C 30V VW-1 28AWG/1P AND 24AWG/2C USB2.0 CABLE	L	MM
NO.	MATERIAL	DESCRIPTION	QTY.	UNIT

Itemref	Quantity	Title/Name, designation, material, dimension etc			Article NO./Reference		
Designed by FLY	Checkde by HELEN	Approved by - date 2023.01.16	File name	Date 2023.01.16	Scale FREE		
ANGLE:				BA-USB2-EXT-XX-1			
UNIT:MM					Edition 1	Sheet 1/1	