


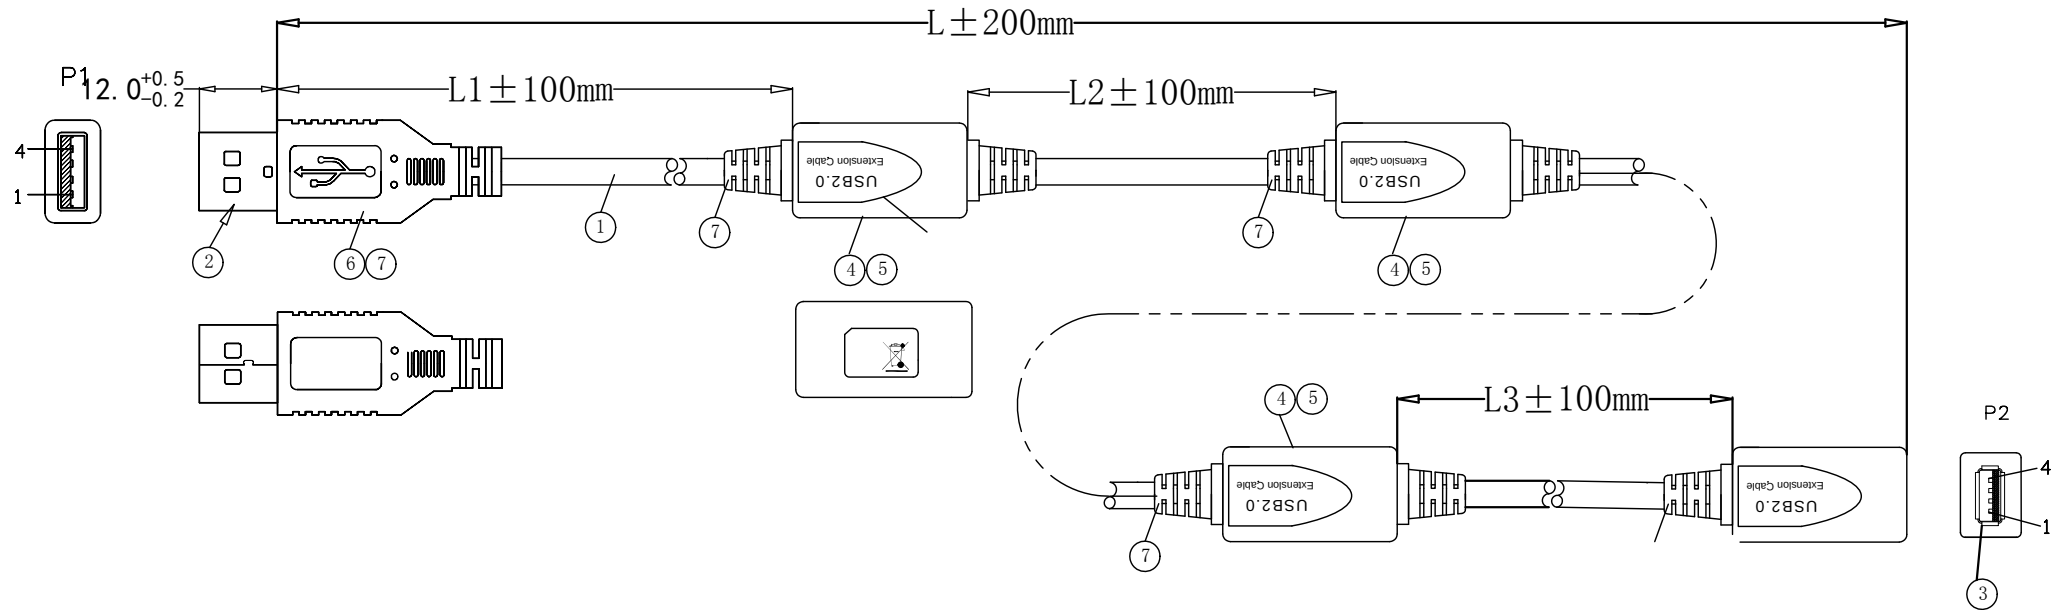


P/N	L/(mm)	L1/(mm)	L2/(mm)	L3/(mm)
BA-USB2-EXT-25-1	25000	5000	5000	7500

NOTES:

- Read & Write speed more than 48MB/S with SSD disk.
- RoHS & REACH COMPLIANT

PIN OUT

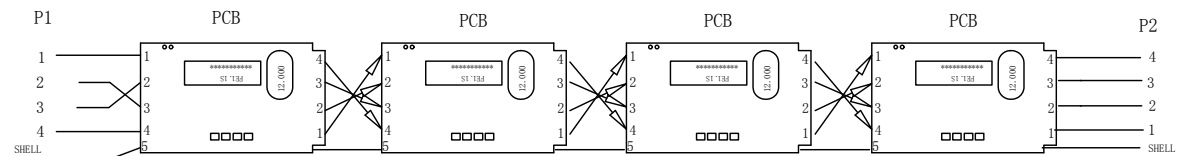

⑦	MOLDED	45P BLACK PVC		G
⑥	MOLDED	LDPE		G
⑤	PLASTIC HOOD	USB2.0 AF PLASTIC HOOD/BLACK	4	PCS
④	PCBA	PCB-FE1.1S	4	PCS
③	CONNECTOR	USB A FEMALE, GOLD PLATED PIN, WHITE INSULATION, NICKEL PLATED SHELL	1	PCS
②	CONNECTOR	USB A MALE, GOLD PLATED PIN, WHITE INSULATION, NICKEL PLATED SHELL	1	PCS
①	CABLE	7/0.127TC*1P+7/0.2TC*2C+ADB, BLACK PVC JACKET, OD:4.5±0.2mm MARKING:E***** 兄 AWM 2725 80℃ 30V VW-1 28AWG/1P AND 24AWG/2C USB2.0 CABLE	L	MM
NO.	MATERIAL	DESCRIPTION	QTY.	UNIT

Ltemref	Quantity	Title/Name, designation, material, dimension etc			Article NO. /Reference		
Designed by FLY	Checkde by HELEN	Approved by - date 2023. 01. 16	File name	Date 2023. 01. 16	Scale FREE		
ANGLE: 			BA-USB2-EXT-25-1				
UNIT:MM				Edition 1	Sheet 1/1		