


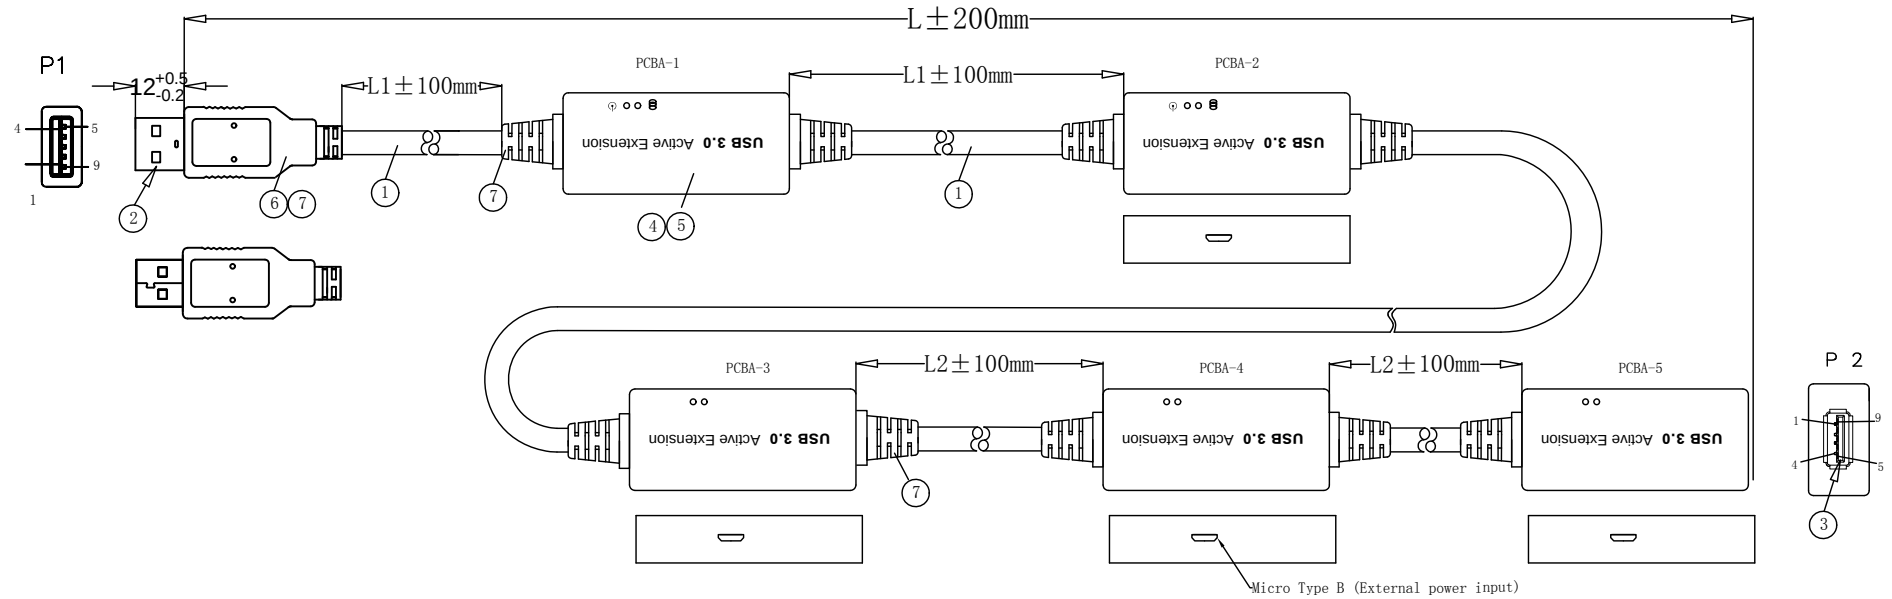


P/N	L/(mm)	L1/(mm)	L2/(mm)
BA-USB3-EXT-30-1	30000	5000	7500

NOTES:

1. Read & Write speed more than 300MB/S with SSD disk.
2. Recommend to use power adapter with Micro_B output DC5V 2A.
3. RoHS & REACH COMPLIANT

PIN OUT

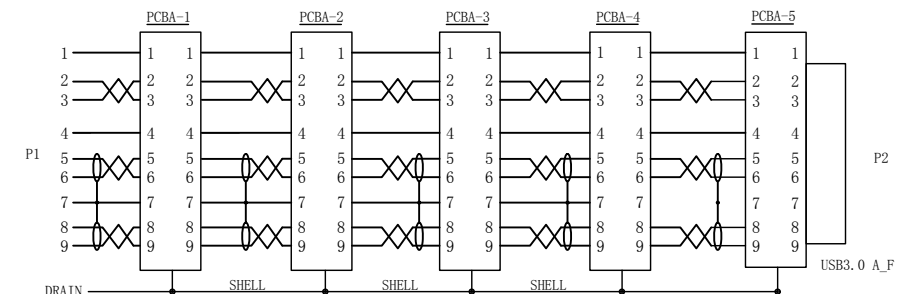

⑦	MOLDED	45P BLACK PVC		G
⑥	MOLDED	LDPE		G
⑤	PLASTIC HOOD	PLASTIC HOOD/BLACK	5	PCS
④	PCBA	USB3.0 PCBA(IC:VL211)	5	PCS
③	CONNECTOR	USB3.0 AF, GOLD PLATED PIN, BLUE INSULATION, NICKEL PLATED SHELL	1	PCS
②	CONNECTOR	USB3.0 AM, GOLD PLATED PIN, BLUE INSULATION, NICKEL PLATED SHELL	1	PCS
①	CABLE	(7/0.127TC*1P+D+AM)*2C+7/0.127TC*1P+7/0.127TC*2C+ADB PVC/BLACK JACKET OD:5.5±0.2mm MARKING: HIGH SPEED USB 3.0 CABLE	L	MM
NO.	MATERIAL	DESCRIPTION	QTY.	UNIT

Ltemref	Quantity	Title/Name, designation, material, dimension etc				Article NO./Reference	
Designed by FLY		Checkde by HELEN	Approved by - date 2023. 01. 16	File name	Date 2023. 01. 16	Scale FREE	
ANGLE: 					BA-USB3-EXT-30-1		
UNIT:MM							
					Edition 1	Sheet 1/1	