


P/N	L/(mm)	T/(mm)
BA-USB3-GTC-1	200	15

NOTES:

1. NORMAL FUNCTION
2. RoHS & REACH COMPLIANT

⑥	DUST CAP	TYPE C MALE DUST CAP	1	PCS
⑥	MOLDED	45P BLACK PVC		G
⑥	MOLDED	LDPE		G
⑤	PLASTIC HOOD	RJ45 BLACK PLASTIC HOOD	1	PCS
④	PLASTIC HOOD	TYPE C BLACK PLASTIC HOOD	1	PCS
③	CONNECTOR	TYPE C TO RJ45 FEMALE, PIN PLATED GOLD, BLACK INSULATION, NICKEL PLATED SHELL PCBA+IC:realtek RTL8153B	1	PCS
②	CONNECTOR	TYPE C MALE , GOLD PLATED PIN, BULE INSULATION, NICKEL PLATED SHELL+R=5.1KΩ	1	PCS
①	CABLE	(7/0.10TC*1P+D+AL/MY)*2P+7/0.2TC*2C+7/0.1TC*1P+ADB, BLACK PVC JACKET, OD:4.5±0.2MM, MARKING: HIGH SPEED USB3.0 CABLE E*****兄 AWM STYLE 20276 80℃ 30V VW-1	L	MM
NO.	MATERIAL	DESCRIPTION	QTY.	UNIT

PIN OUT

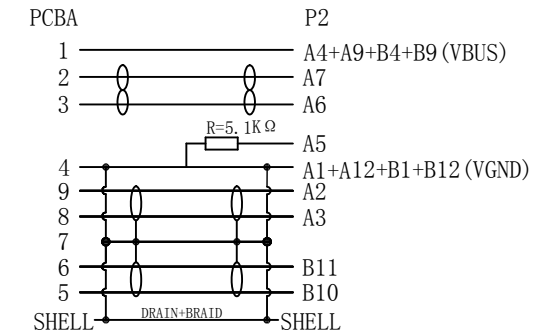

Ltemref	Quantity	Title/Name, designation, material, dimension etc			Article NO./Reference		
Designed by FLY	Checkde by HELEN	Approved by - date 2023.02.09	File name	Date 2023.02.09	Scale FREE		
ANGLE:				BA-USB3-GTC-1			
UNIT:MM						Edition 1	Sheet 1/1