



P/N	L/(mm)	T/(mm)
BC-DSP-ADP-PNL-DP-MF	200	30

NOTES:

1. OPEN/SHORT/INTERMITTENCE:100%
2. INSULATION RESISTANCE:DC 300V 0.01S 10MΩ Min
3. CONDUCTIVE RESISTANCE:5Ω Max
4. RESOLUTION:4K*2K@60Hz
5. RoHS & REACH COMPLIANT



PIN OUT

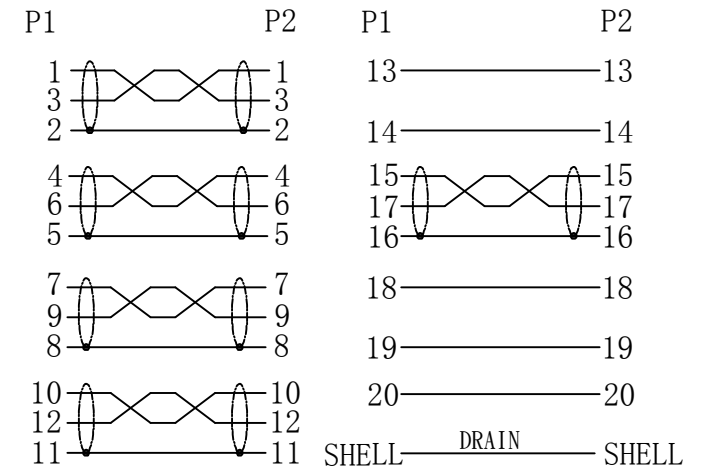

⑨	SCREWS	PHILLIPS SCREW NICKEL PLATED UNC #4-40*15mm	2	PCS
⑧	DUST CAP	DP MALE CAP	1	PCS
⑦	SHELL	DISPLAYPORT MALE BLACK OUTER COVER	1	PCS
⑥	NUT	NUT-NICKEL PLATED UNC #4-40	2	PCS
⑤	MOLDED	45P BLACK PVC		G
④	MOLDED	LDPE		G
③	CONNECTOR	DP 20P FEMALE, GOLD PLATED PIN, BLACK INSULATION, GOLD PLATED SHELL+PLASTIC COVER	1	PCS
②	CONNECTOR	DP 20P MALE, GOLD PLATED PIN, BLACK INSULATION, GOLD PLATED SHELL	1	PCS
①	CABLE	(7/0.127TC*1P+D+FAM)*5+7/0.127TC*5C+ADB PVC/BLACK JACKET OD:7.3±0.2mm MARKING: DisplayPort Cable E***** 兄 AWM STYLE 20276 80℃ 30V VW-1	L	MM
NO.	MATERIAL	DESCRIPTION	QTY.	UNIT

Ltemref	Quantity	Title/Name, designation, material, dimension etc			Article NO./Reference		
Designed by FLY	Checkde by HELEN	Approved by - date 2023.01.16	File name	Date 2023.01.16	Scale FREE		
ANGLE:				BC-DSP-ADP-PNL-DP-MF			
UNIT:MM					Edition 1	Sheet 1/1	