



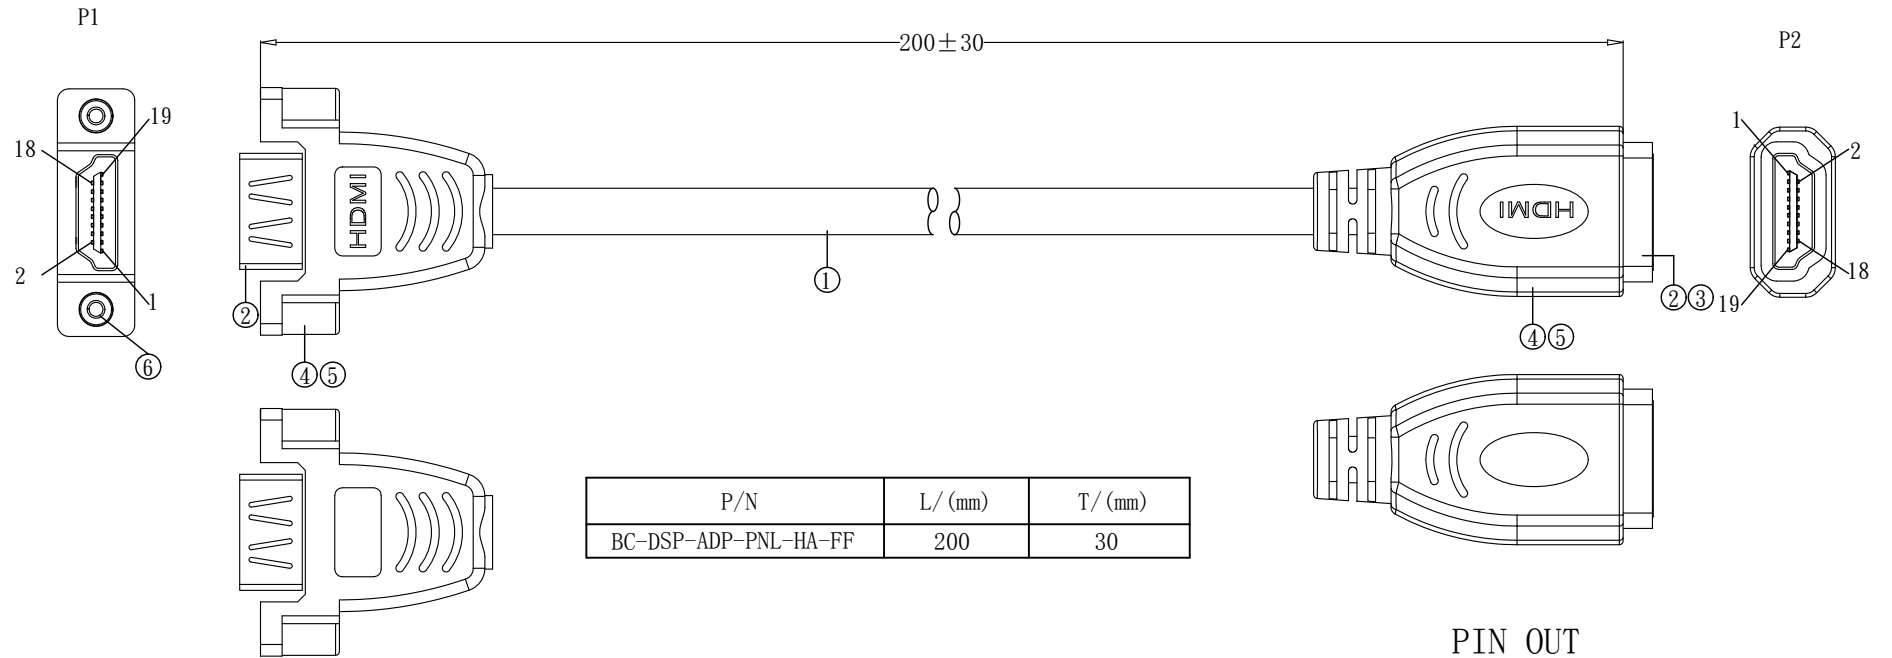


NOTES:


1. OPEN/SHORT/INTERMITTENCE:100%
2. INSULATION RESISTANCE:DC 300V 0.01S 10MΩ Min
3. CONDUCTIVE RESISTANCE:5Ω Max
4. RoHS & REACH COMPLIANT



PIN OUT

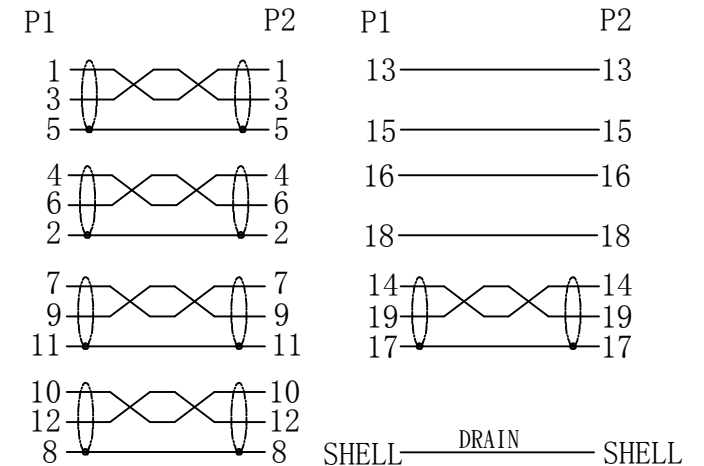

⑦	SCREWS	PHILLIPS SCREW NICKEL PLATED UNC #4-40*15mm	2	PCS
⑥	NUT	Embedded NUT-NICKEL PLATED UNC #4-40	2	PCS
⑤	MOLDED	45P BLACK PVC		G
④	MOLDED	LDPE		G
③	PLASTIC	HDMI AF PLASTIC BOOT	1	PCS
②	CONNECTOR	HDMI 20P FEMALE, GOLD PLATED PIN, BLACK INSULATION, GOLD PLATED SHELL	2	PCS
①	CABLE	(7/0.12TC*1P+D+FAM)*5+7/0.12TC*4C+ADB PVC/BLACK JACKET OD:7.3±0.2mm	L	MM
NO.	MATERIAL	DESCRIPTION	QTY.	UNIT

Ltemref	Quantity	Title/Name, designation, material, dimension etc			Article NO./Reference		
Designed by FLY		Checkde by HELEN	Approved by - date 2023. 01. 17	File name	Date 2023. 01. 17	Scale FREE	
ANGLE: 					BC-DSP-ADP-PNL-HA-FF		
UNIT:MM							
					Edition 1	Sheet 1/1	