


P/N	L/(mm)	T/(mm)	RESOLUTION
BC-DSP-DP-MM-05-UHD60	5000	70	4K*2K@60Hz
BC-DSP-DP-MM-10-UHD30	10000	300	4K*2K@30Hz


PIN OUT

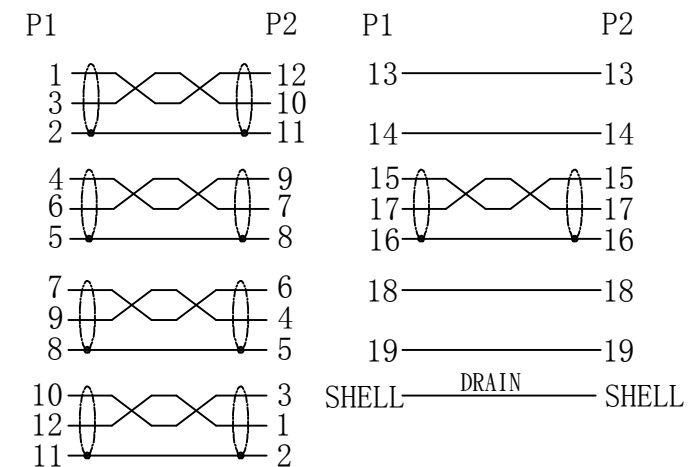

NOTES:

1. OPEN/SHORT/INTERMITTENCE:100%.
2. INSULATION RESISTANCE:DC 300V 0.01S 10M Ω Min
3. CONDUCTIVE RESISTANCE:10 Ω Max
4. RoHS & REACH COMPLIANT

⑥	DUST CAP	DP MALE DUST CAP	2	PCS
⑤	MOLDED	45P BLACK PVC		G
④	MOLDED	LDPE		G
③	PLASTIC HOOD	DP MALE BLACK PLASTIC HOOD	2	SET
②	CONNECTOR	DP 20PIN MALE, GOLD PLATED PIN, BLACK INSULATION, GOLD PLATED SHELL	2	PCS
①	CABLE	(7/0. 127TC*1P+D+FAM)*5+7/0. 127TC*4C+ADB PVC/BLACK JACKET OD: 7.3±0.2mm MARKING: DisplayPort Cable E***** 兄 AWM STYLE 20276 80℃ 30V VW-1	L	MM
NO.	MATERIAL	DESCRIPTION	QTY.	UNIT

Ltemref	Quantity	Title/Name, designation, material, dimension etc			Article NO. /Reference		
Designed by FLY		Checkde by HELEN	Approved by - date 2023. 01. 17	File name	Date 2023. 01. 17	Scale FREE	
ANGLE: 				BC-DSP-DP-MM-XX-UHD60			
UNIT:MM					Edition 1	Sheet 1/1	