



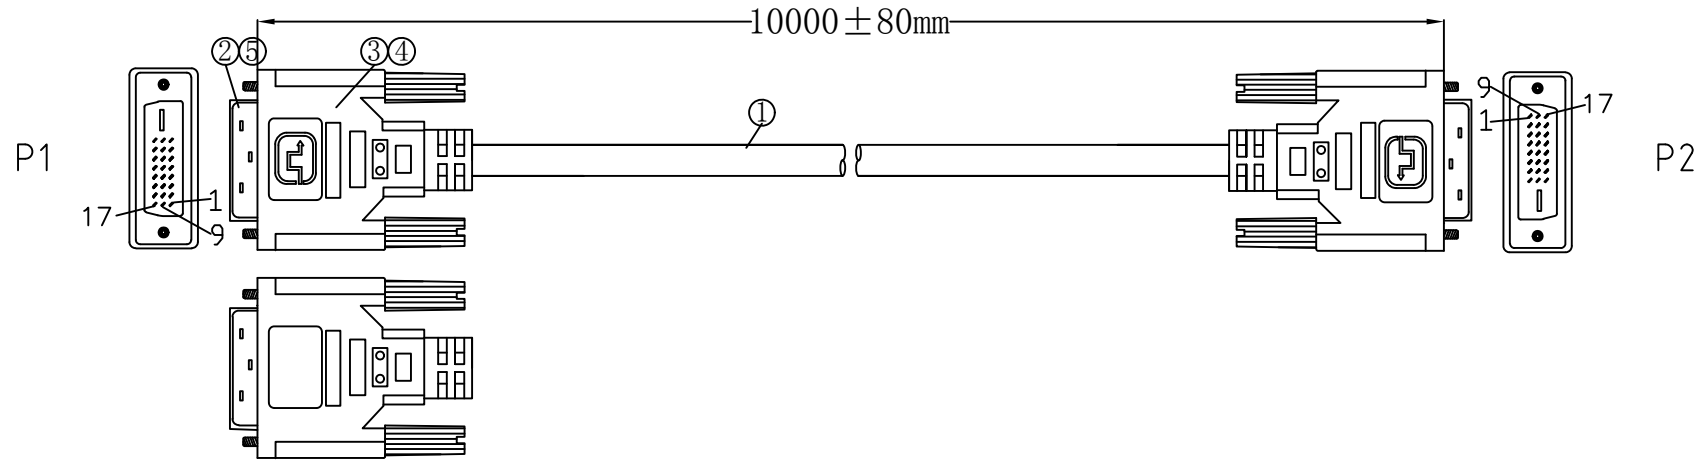

Electronic Tests:

1. Open/Short/Intermittence: 100%
2. Insulation Resistance: DC300V 0.01S 10M Ω (Min)
3. Conductive Resistance: 10 Ω (Max)
4. RESOLUTION: 1920*1080P@60Hz
5. RoHS & REACH COMPLIANT

PIN OUT

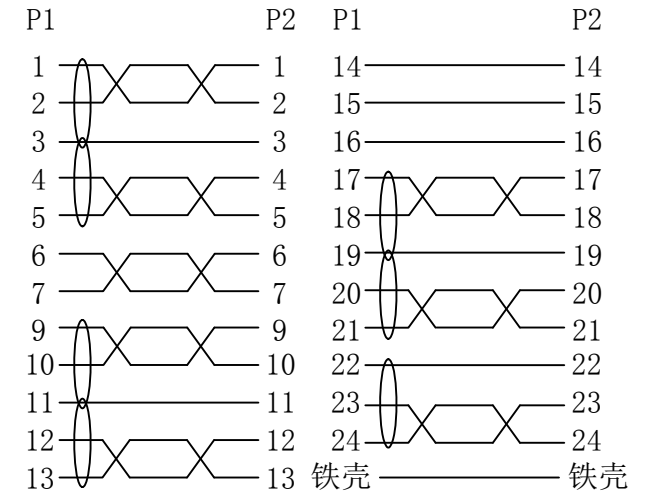

⑤	DUST CAP	DVI MALE LDPE	2	PCS
④	MOLDED	45P Black PVC		G
③	MOLDED	LDPE		G
②	CONNECTOR	DVI (24+1) Male, Gold Plated Pin, Black Insulation, Nickel Plated Shell	2	PCS
①	CABLE	(1/0.32BC*1P+D+FAM)*7C+1/0.32BC*1P+1/0.32BC*3C+ADB BLACK PVC JACKET, OD:8.5±0.2mm MARKING:AWM STYLE 20276 VW-1 80°C 30V DVI Cable RoHS & REACH Compliant	10000	MM
NO.	MATERIAL	DESCRIPTION	QTY.	UNIT

Ltemref	Quantity	Title/Name, designation, material, dimension etc			Article NO. /Reference	
Designed by FLY	Checkde by HELEN	Approved by - date 2022. 12. 26	File name	Date 2022. 12. 26	Scale FREE	
ANGLE: 			BC-DSP-DVI-MM-10			
UNIT:MM				Edition 1	Sheet 1/1	