RevNo.	Revision note	Date	Signature	Checked

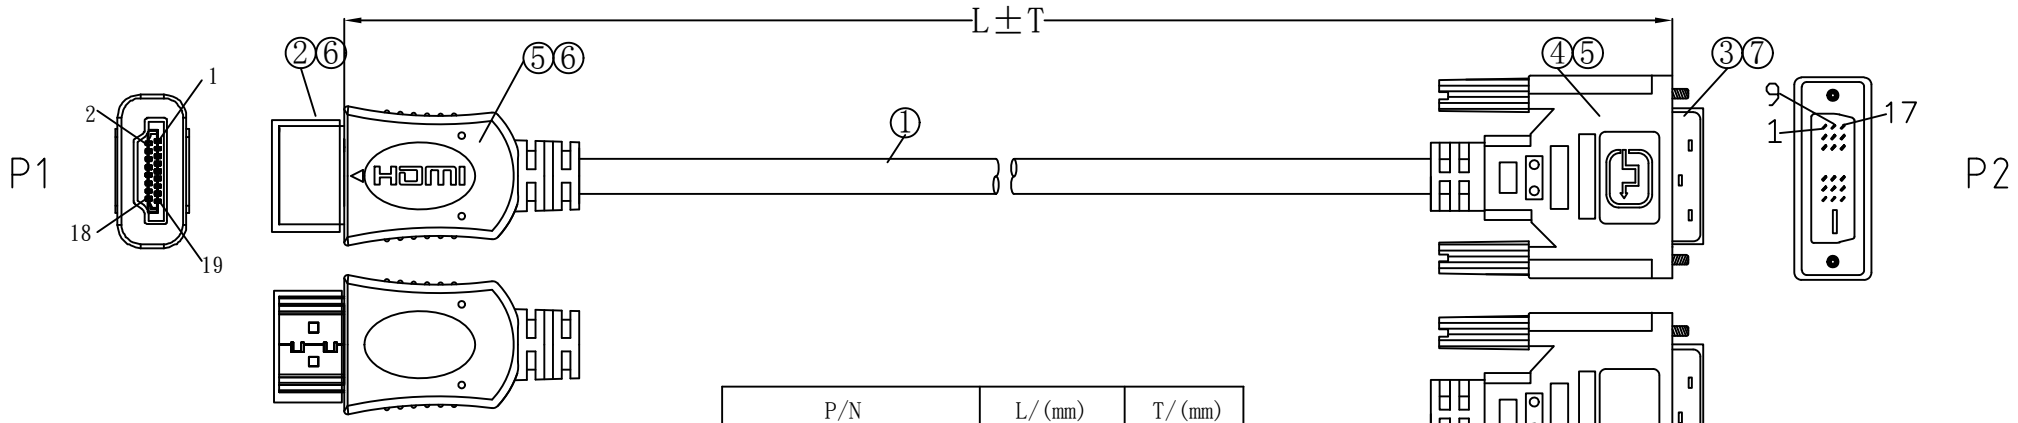

P/N	L/(mm)	T/(mm)
BC-DSP-HA-DVI-02	2000	30
BC-DSP-HA-DVI-03	3000	40
BC-DSP-HA-DVI-05	5000	60

Electronic Tests:

1. Open/Short/Intermittence: 100%
2. Insulation Resistance: DC300V 0.01S 10MΩ(Min)
3. Conductive Resistance: 5Ω(Max)
4. RESOLUTION: 1920*1080P@60Hz
5. RoHS & REACH COMPLIANT

PIN OUT

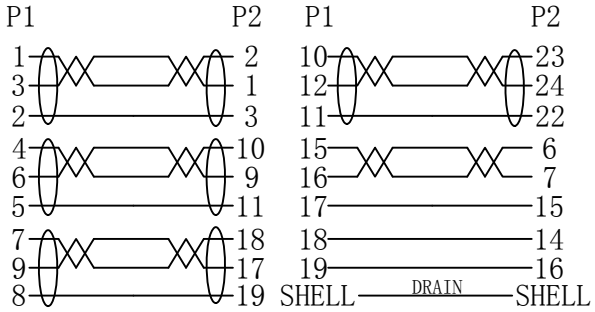

NO.	MATERIAL	DESCRIPTION	QTY.	UNIT
⑦	DUST CAP	DVI MALE LDPE	1	PCS
⑥	DUST CAP	HDMI MALE LDPE	1	PCS
⑤	MOLDED	45P Black PVC		G
④	MOLDED	LDPE		G
③	CONNECTOR	DVI(18+1) Male,Gold Plated Pin,Black Insulation,Nickel Plated Shell	1	PCS
②	CONNECTOR	HDMI A Male,Gold Plated Pin,Black Insulation,Nickel Plated Shell	1	PCS
①	CABLE	(1/0.254BC*1P+D+AM)*4C+1/0.254BC*1P+1/0.254BC*3C+ADB BLACK PVC JACKET,OD:6.0±0.2mm MARKING:AWM STYLE 20276 VW-1 80℃ 30V DVI Cable RoHS & REACH Compliant	L	MM

Ltemref	Quantity	Title/Name,designation,material,dimension etc	Article NO./Reference
Designed by FLY	Checkde by HELEN	Approved by - date 2022.11.10	File name
Date 2022.11.10	Scale FREE		
ANGLE:	beek	BC-DSP-HA-DVI-0X	
UNIT:MM		Edition 1	Sheet 1/1