



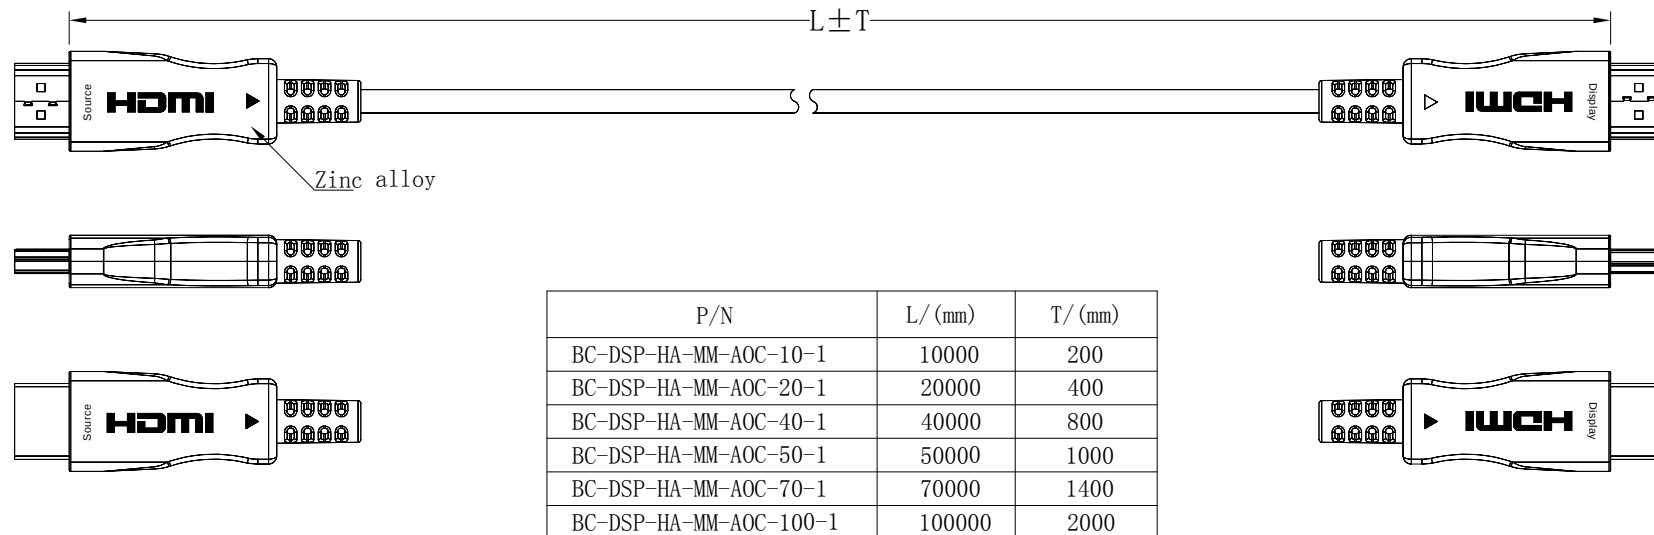

NOTE:

Supports computer resolutions to 4K@60Hz@4:4:4
 Plug and Play
 Compatible with HDMI 2.0 standard
 Support HDCP2.2@ARC
 Self-detecting function for EDID information
 No loss of signal
 Hybrid optical cable with fiber and copper wire
 PIN gold plated, shell gold plated, Blue rubber core
 Environmental Specifications: For Indoor use only
 Operating temperature: -40°C to 70°C
 Minimum bending radius 20mm
 Max. tension force: 100N
 Powered via HDMI devices
 4core OM3 Multimode Fiber (high speed data) and 7core copper cable
 Round cable Black PVC jacket
 ROHS 2.0 & REACH compliant
 Packing: package lpc reel

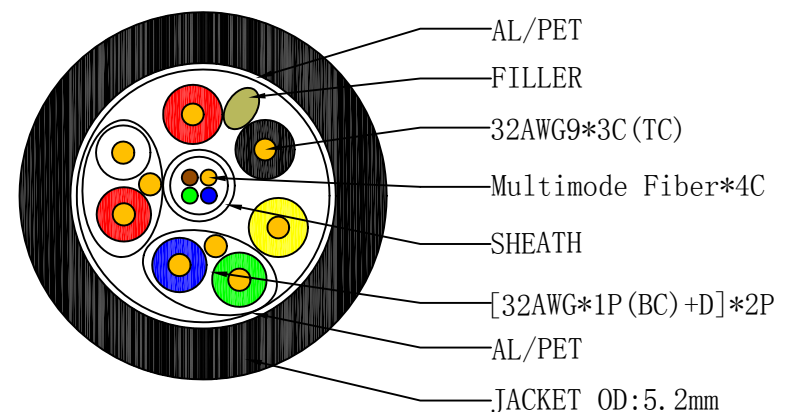

Ltemref	Quantity	Title/Name, designation, material, dimension etc			Article NO./Reference		
Designed by FLY	Checkde by HELEN	Approved by - date 2023. 02. 06	File name	Date 2023. 02. 06	Scale FREE		
ANGLE: 				BC-DSP-HA-MM-XX-1			
UNIT:MM					Edition 1	Sheet 1/1	