



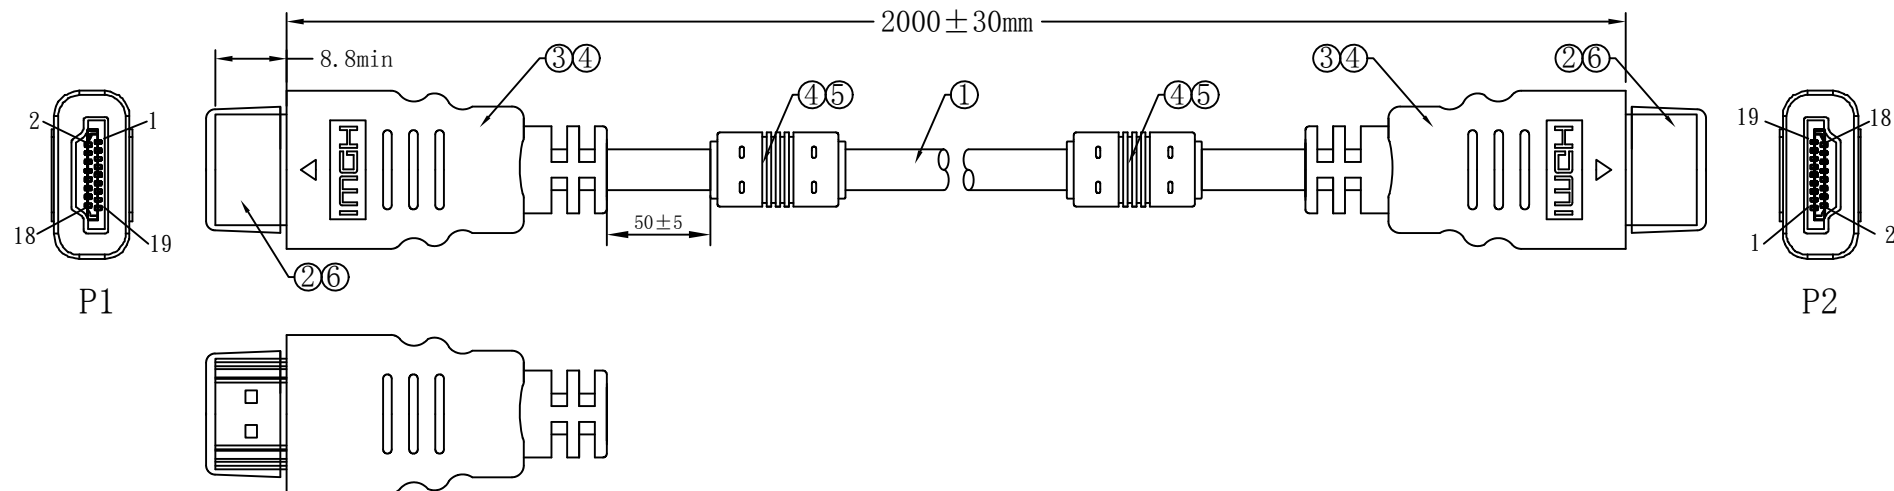

Electronic Tests:

1. Open/Short/Intermittence: 100%
2. Insulation Resistance: DC300V 0.01S 10MΩ (Min)
3. Conductive Resistance: 5Ω (Max)
4. RESOLUTION: 4K*2K@60Hz
5. RoHS & REACH COMPLIANT

PIN OUT

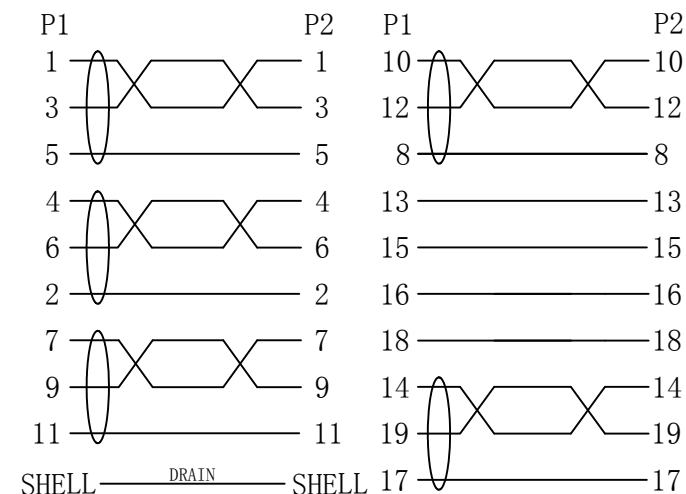

⑥	DUST CAP	HDMI MALE LDPE	2	PCS
⑤	FERRITE	28.5*φ14*φ9.0	2	PCS
④	MOLDED	45P Black PVC		G
③	MOLDED	LDPE		G
②	CONNECTOR	HDMI A Male, Gold Plated Pin, Black Insulation, Gold Plated Shell	2	PCS
①	CABLE	(1/0.254BC*1P+D+AL/MY)*5C+1/0.254BC*4C+ADB BLACK PVC JACKET, OD:6.0±0.2mm MARKING: High Speed HDMI Cable with Ethernet	L	MM
NO.	MATERIAL	DESCRIPTION	QTY.	UNIT

Ltemref	Quantity	Title/Name, designation, material, dimension etc				Article NO./Reference	
Designed by FLY		Checkde by HELEN	Approved by - date 2022. 12. 20	File name	Date 2022. 12. 20	Scale FREE	
ANGLE: 					BC-DSP-HA-MM-UHD20-02		
UNIT:MM							
					Edition 1	Sheet 1/1	