



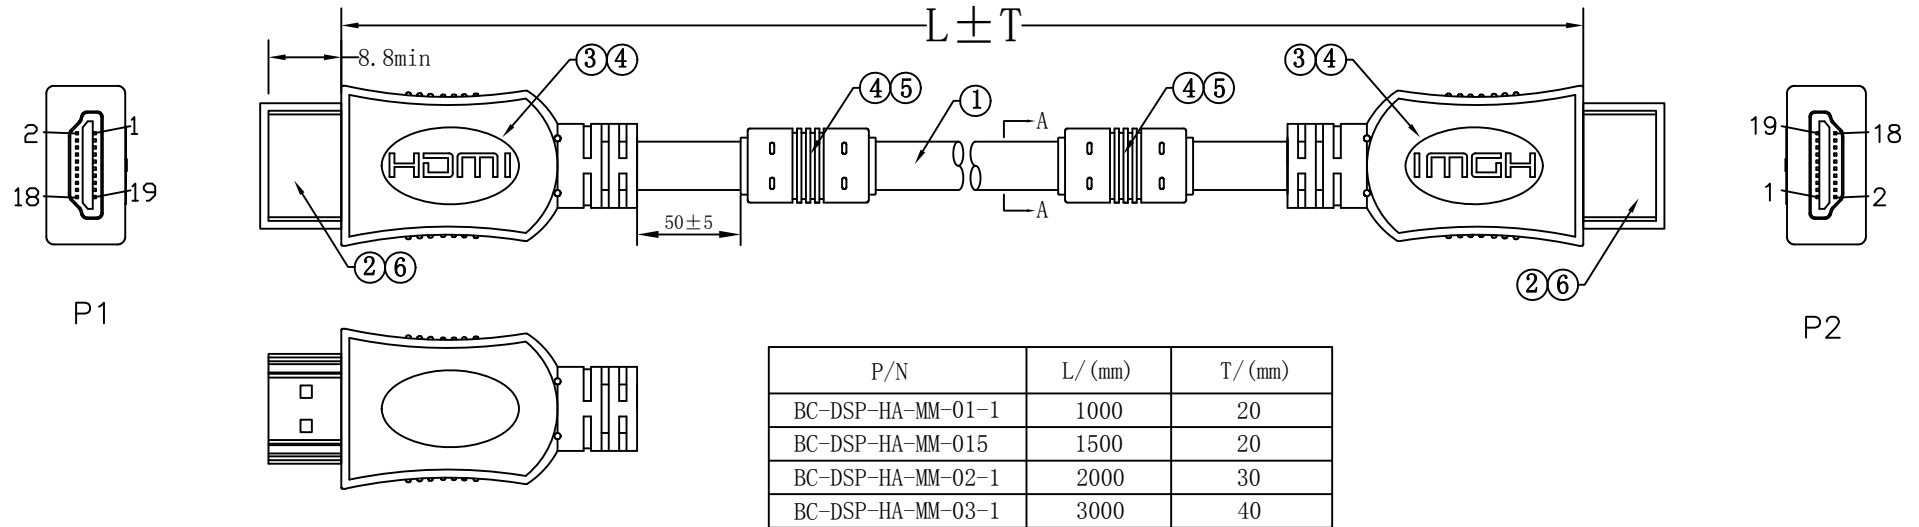

Electronic Tests:

1. Open/Short/Intermittence: 100%
2. Insulation Resistance: DC300V 0.01S 10M Ω (Min)
3. Conductive Resistance: 10 Ω (Max)
4. RESOLUTION: 4K*2K@30Hz
5. RoHS & REACH COMPLIANT

PIN OUT

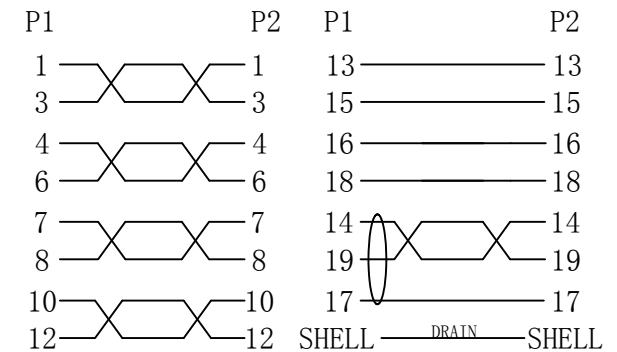

⑥	DUST CAP	HDMI MALE LDPE	2	PCS
⑤	FERRITE	28.5* ϕ 14* ϕ 9.0	2	PCS
④	MOLDED	45P Black PVC		G
③	MOLDED	LDPE		G
②	CONNECTOR	HDMI A Male, Gold Plated Pin, Black Insulation, Gold Plated Shell	2	PCS
①	CABLE	(1/0.254CCS*1P+AL/MY)*4C+(1/0.254CCS*1P+D+AL/MY)*1C+1/0.254CCS*4C+AD BLACK PVC JACKET, OD: 5.5 $\pm$ 0.2mm MARKING: High Speed HDMI Cable with Ethernet	L	MM
NO.	MATERIAL	DESCRIPTION	QTY.	UNIT

Ltemref	Quantity	Title/Name, designation, material, dimension etc			Article NO./Reference		
Designed by FLY		Checkde by HELEN	Approved by - date 2022. 12. 20	File name	Date 2022. 12. 20	Scale FREE	
ANGLE: 				BC-DSP-HA-MM-**-1			
UNIT:MM					Edition 1	Sheet 1/1	