


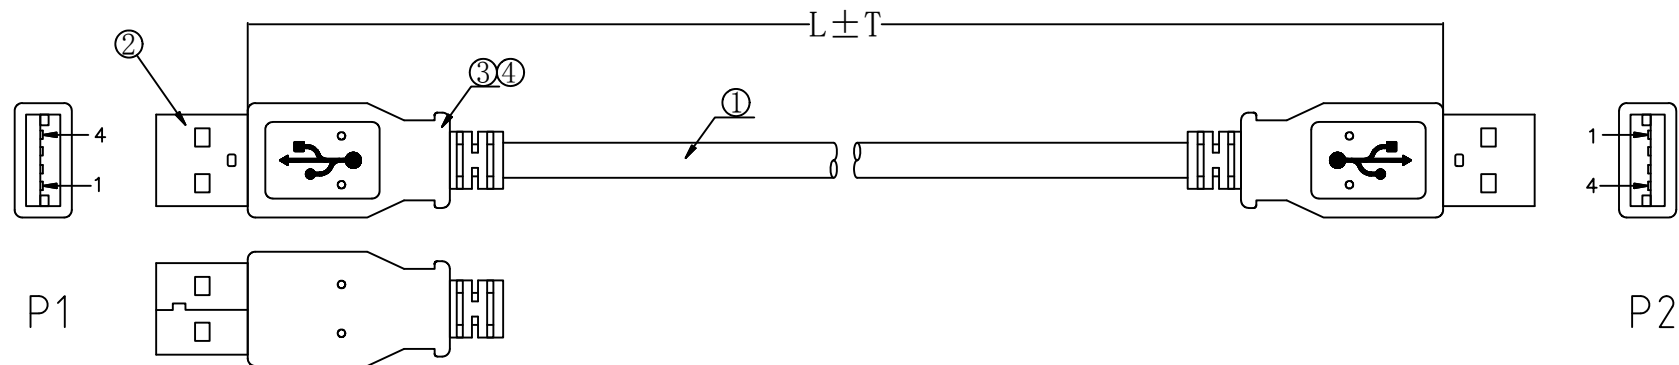


P/N	L/(mm)	T/(mm)
BC-USB-2AA-MM-01	1000	20
BC-USB-2AA-MM-02	2000	30
BC-USB-2AA-MM-03	3000	40

NOTES:

1. OPEN/SHORT/INTERMITTENCE:100%.
2. INSULATION RESISTANCE:DC 300V 0.01S 5M Ω Min
3. CONDUCTIVE RESISTANCE:5 Ω Max
4. RoHS & REACH COMPLIANT

PIN OUT

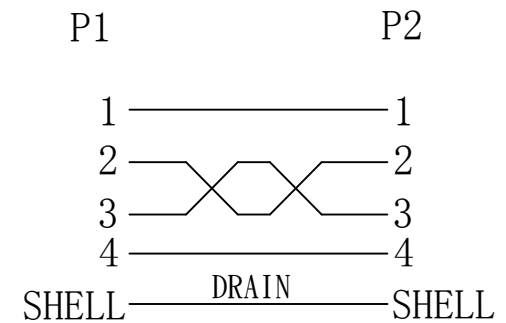

④	MOLDED	BLACK PVC		G
③	MOLDED	LDPE		G
②	CONNECTOR	USB2.0 AM, PIN PLATED GOLD, WHITE INSULATION, SHELL PLATED NICKEL	2	PCS
①	CABLE	7/0.12BC*1P+7/0.12BC*2C+ADB PVC/BLACK JACKET OD:3.8 $\pm$ 0.2mm MARKING: AWM STYLE 2725 80 $^{\circ}$ C 30V USB 2.0 High Speed Cable	L	MM
NO.	MATERIAL	DESCRIPTION	QTY.	UNIT

Ltemref	Quantity	Title/Name, designation, material, dimension etc			Article NO./Reference		
Designed by FLY	Checkde by HELEN	Approved by - date 2023. 01. 13	File name	Date 2023. 01. 13	Scale FREE		
ANGLE: 			BC-USB-2AA-MM-0X				
UNIT:MM				Edition 1	Sheet 1/1		