



P/N	L/(mm)	T/(mm)
BC-USB-2AmcB-MM-01	1000	20
BC-USB-2AmcB-MM-02	1800	30

- NOTES:
- 1. OPEN/SHORT/INTERMITTENCE:100%.
 - 2. INSULATION RESISTANCE:DC 300V 0.01S 10MΩ Min
 - 3. CONDUCTIVE RESISTANCE:5 Ω Max
 - 4. RoHS & REACH COMPLIANT

PIN OUT

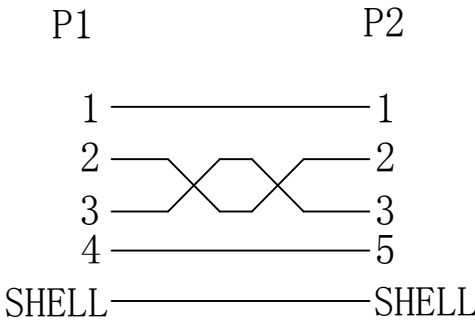

⑤	MOLDED	BLACK PVC		G
④	MOLDED	LDPE		G
③	CONNECTOR	USB2.0 MICRO BM, GOLD PLATED PIN, BLACK INSULATION, NICKEL PLATED SHELL	1	PCS
②	CONNECTOR	USB2.0 AM, GOLD PLATED PIN, WHITE INSULATION, NICKEL PLATED SHELL	1	PCS
①	CABLE	7/0.12BC*1P+7/0.12BC*2C+ADB PVC/BLACK JACKET OD:3.8±0.2mm MARKING: AWM STYLE 2725 80℃ 30V USB 2.0 High Speed Cable	L	MM
NO.	MATERIAL	DESCRIPTION	QTY.	UNIT

Ltemref	Quantity	Title/Name, designation, material, dimension etc			Article NO./Reference		
Designed by FLY	Checkde by HELEN	Approved by - date 2023. 01. 13	File name	Date 2023. 01. 13	Scale FREE		
ANGLE: 			BC-USB-2AmcB-MM-0X				
UNIT:MM					Edition 1	Sheet 1/1	