



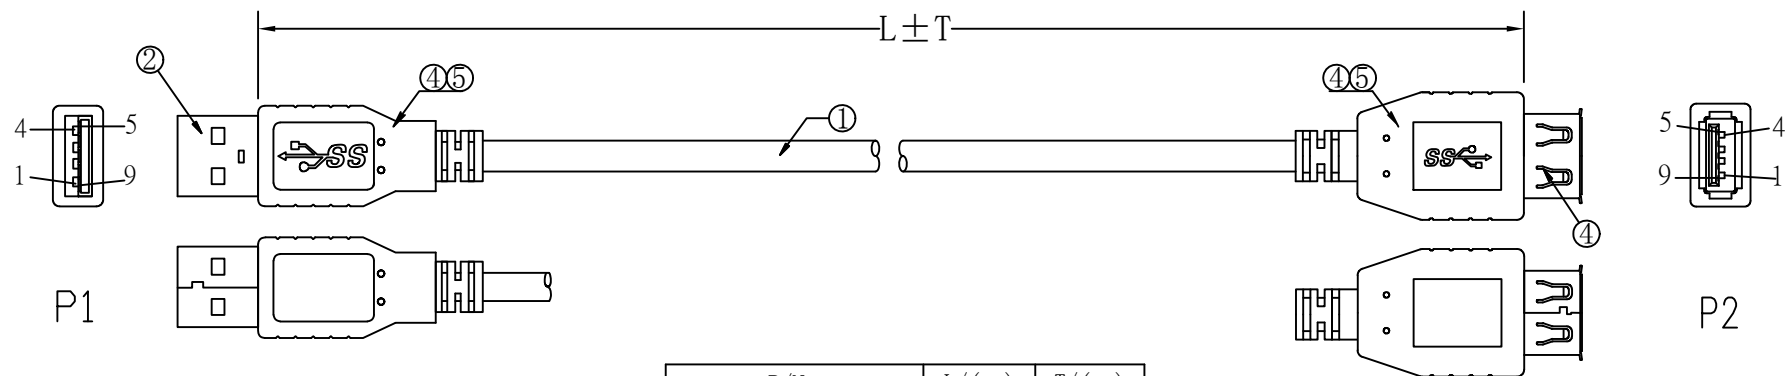

P/N	L/(mm)	T/(mm)
BC-USB-3AA-MF-02	1800	30

PIN OUT

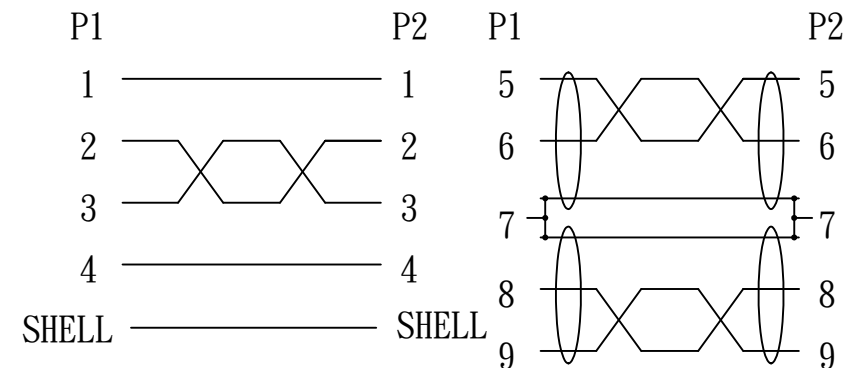

NOTES:

1. OPEN/SHORT/INTERMITTENCE:100%.
2. INSULATION RESISTANCE:DC 300V 0.01S 10M Ω Min
3. CONDUCTIVE RESISTANCE:5 Ω Max
4. RoHS & REACH COMPLIANT

⑤	MOLDED	BLACK PVC		G
④	MOLDED	LDPE		G
③	CONNECTOR	USB3.0 AF, GOLD PLATED PIN, BLUE INSULATION, NICKEL PLATED SHELL	1	PCS
②	CONNECTOR	USB3.0 AM, GOLD PLATED PIN, BLUE INSULATION, NICKEL PLATED SHELL	1	PCS
①	CABLE	(7/0.12TC*1P+D+AM)*2+7/0.12TC*1P+7/0.20TC*2C+ADB PVC/BLACK JACKET OD:5.6 $\pm$ 0.2mm MARKING: High Speed USB3.0 Cable AWM STYLE 2725 80 $^{\circ}$ C 30V VW-1	L	MM
NO.	MATERIAL	DESCRIPTION	QTY.	UNIT

Ltemref	Quantity	Title/Name, designation, material, dimension etc			Article NO./Reference	
Designed by FLY		Checkde by HELEN	Approved by - date 2022. 12. 27	File name	Date 2022. 12. 27	Scale FREE
ANGLE: 				BC-USB-3AA-MF-02		
UNIT:MM					Edition 1	Sheet 1/1