



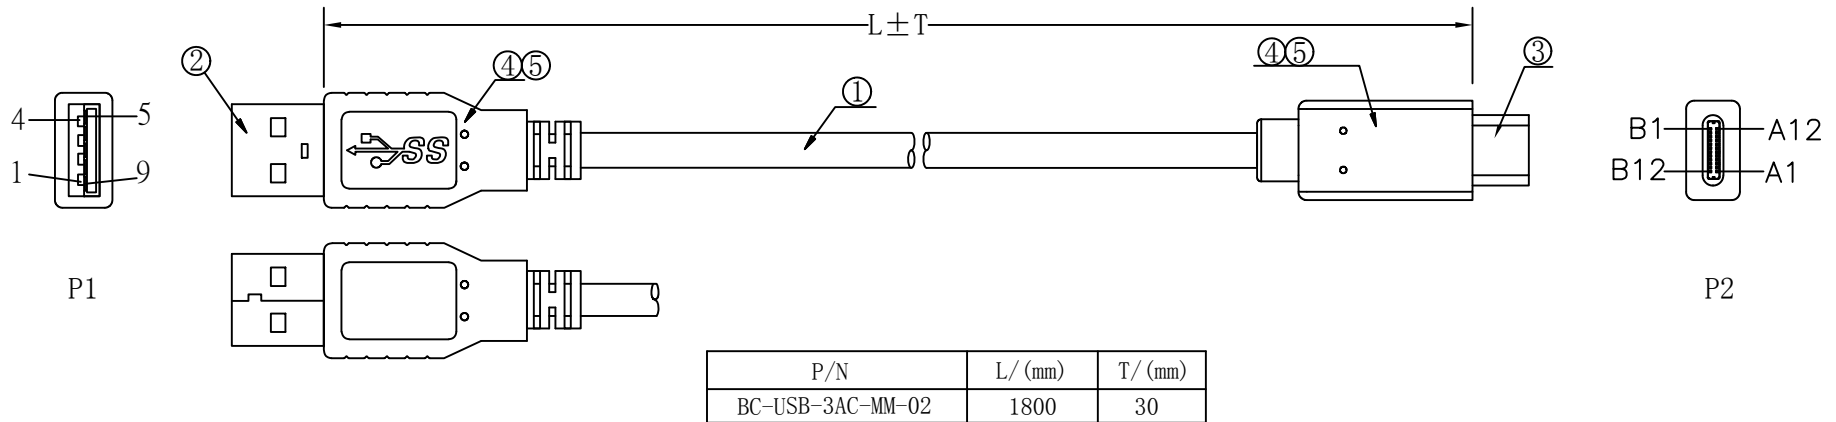

NOTES:

1. Open/Short/Intermittence: 100%
2. DATA SPEED:5Gbps MAX
3. RoHS & REACH COMPLIANT

PIN OUT

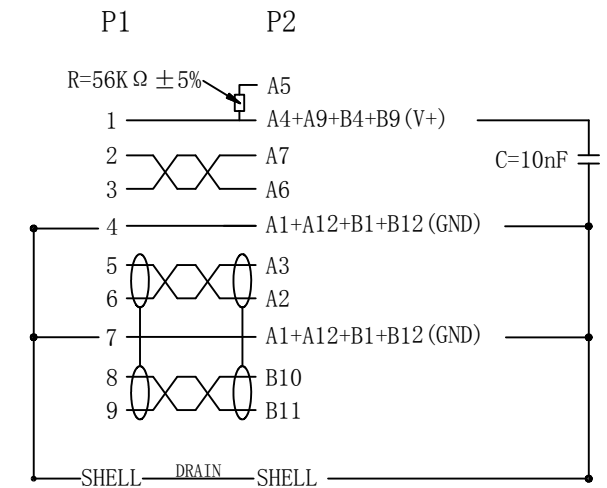

⑤	MOLDED	45P BLACK PVC		G
④	MOLDED	LDPE		G
③	CONNECTOR	USB3.1 C MALE, GOLD PLATED PIN , BLACK INSULATION, NICKEL PLATED SHELL	1	PCS
②	CONNECTOR	USB3.0 A MALE, GOLD PLATED PIN , BLACK INSULATION, NICKEL PLATED SHELL	1	PCS
①	CABLE	(7/0.10TC*1P+D+AM)*2+7/0.10TC*1P+7/0.20TC*2C+ADB, BLACK PVC JACKET, OD:4.5±0.2mm MARKING:High Speed USB3.0 Cable AWM STYLE 2725 80℃ 30V VW-1	L	MM
NO.	MATERIAL	DESCRIPTION	QTY.	UNIT

Ltemref	Quantity	Title/Name, designation, material, dimension etc			Article NO. /Reference		
Designed by FLY		Checkde by HELEN	Approved by - date 2022. 12. 29	File name	Date 2022. 12. 29	Scale FREE	
ANGLE: 					BC-USB-3AC-MM-02		
UNIT:MM						Edition 1	Sheet 1/1