


P/N	L/(mm)	T/(mm)
BC-USB-CMM-40G-01	1000	30

NOTES:

1. Open/Short/Intermittence: 100%
2. Hi-Pot: AC 100V 0.01S 1mA
3. Insulation Resistance: DC 100V 0.01S 5MΩ Min
4. Conductive Resistance: 5Ω Max
5. X5 hard disk read and write speed test:
READ ≥ 2200MB/S
WRITE ≥ 1800MB/S
6. Support PD3.0 20V 5A protocol
7. RoHS & REACH COMPLIANT

PIN OUT

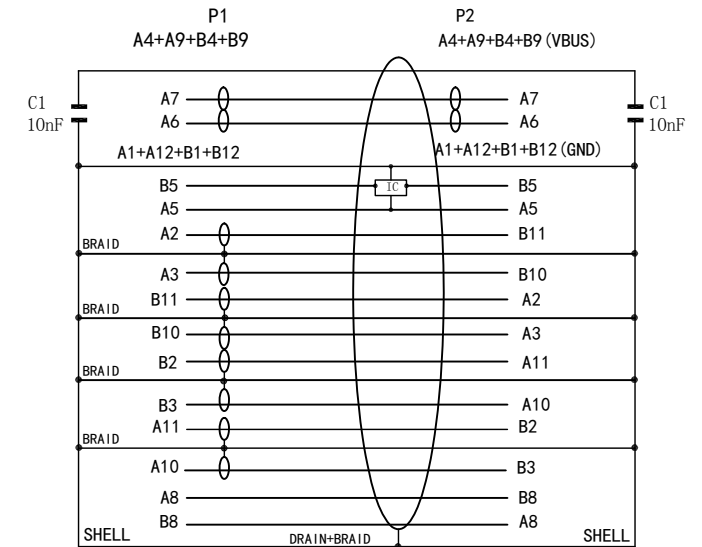

⑥	DUST CAP	TYPE C MALE DUST CAP	2	PCS
⑤	MOLDED	45P BLACK PVC		G
④	MOLDED	LDPE		G
③	CONNECTOR	USB4 TYPE C MALE, GOLD PLATED PIN, NICKEL PLATED SHELL+SHIELDING SHELL+IC:EJ913D	1	PCS
②	CONNECTOR	USB4 TYPE C MALE, GOLD PLATED PIN, NICKEL PLATED SHELL+SHIELDING SHELL	1	PCS
①	CABLE	(7/0.10TC*1C+SP48/0.05TC+CU+HM)*8COAX+(7/0.08TC*1P+HMAM)*1C+7/0.08TC*4C+43/0.10TC*1C+F+PAPER+B(24/12/0.05T) BLACK PVC JACKET, OD:4.8±0.2MM	L	MM
NO.	MATERIAL	DESCRIPTION	QTY.	UNIT

Ltemref	Quantity	Title/Name, designation, material, dimension etc			Article NO. /Reference		
Designed by FLY		Checkde by HELEN	Approved by - date 2023. 01. 17	File name	Date 2023. 01. 17	Scale FREE	
ANGLE: 				BC-USB-CMM-40G-01			
UNIT:MM						Edition 1	Sheet 1/1