
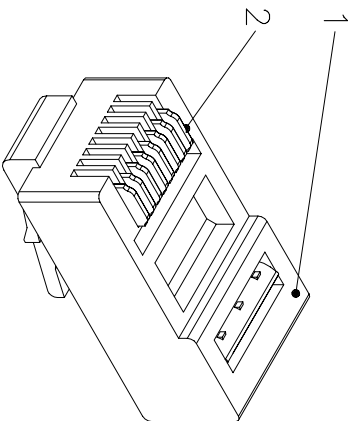
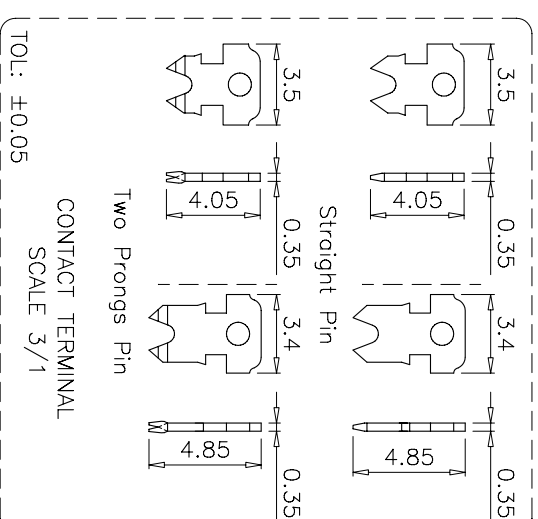
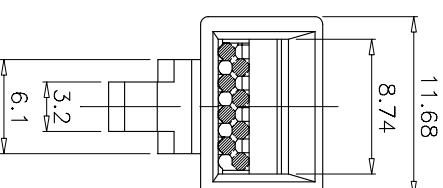
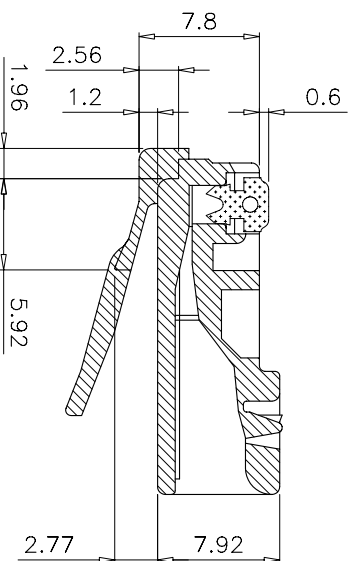


SCALE 2/1



Specification :

Material :

1. Housing : Polycarbonate, UL 94V-2, Transparency color.
2. Contact Terminal : Phosphor Bronze.
Finished : Min. Flush, 3, 6, 15, 30 or 50 micro-inch Gold plating
over 50 micro-inch Nickel plated on contact area.

Performance :

- a. Operation Temperature : -40°C to 80°C.
- b. Cable to Plug Tensile Strength : 7.7 kgs.
- c. Use for 24-26 AWG stranded wires.

REMARK: PB88XXXX
(1) (2)

- (1): 0F=Flush, 03=3U", 06=6U", 15=15U", 30=30U", 50=50U"
(2): Blank=Straight Pin, 2X=Two Prongs Pin


GENERAL
TOLERANCE
OF DIMENSIONS
±0.10

DRAWING	08.DEC.2004	Michelle
CHECK	08.DEC.2004	YTY
APPROVAL	08.DEC.2004	YTY
DATE	NAME	ITEM NO.: PB88XXXX



SCALE 2/1 (A4) UNIT mm DES.: Unshielded 8P8C, Two layers

DRAWING NO.	PB88XXXX(SA1)
DRAWING CLASSIFICATION	S SHEET 1 OF 1



DRAWING CLASSIFICATION

SHEET 1 OF 1

