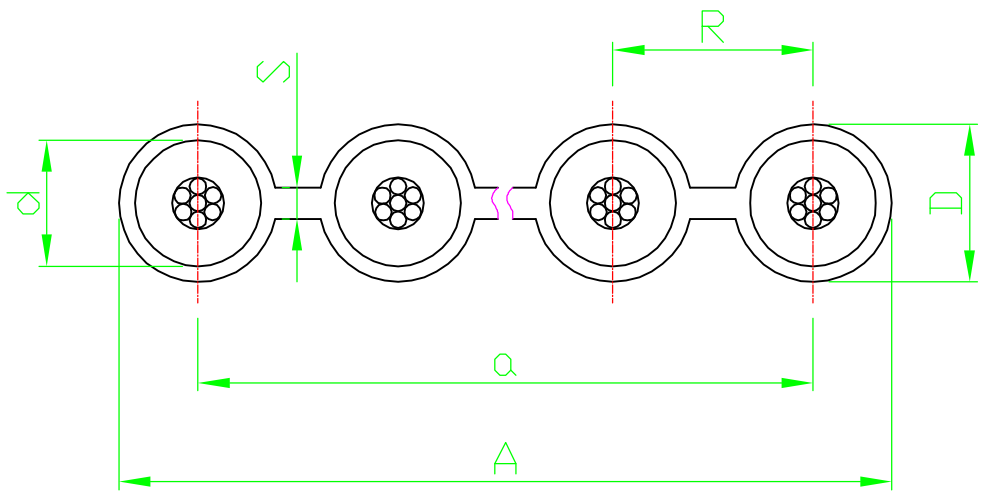

a=(n-1)x1.27 mm
A=(n-1)x1.27 mm+D

NOTES:

MATERIAL
1. Insulation Material: PVC
2. Conductor : 7x0.127 mm
3. Color:Rainbow to IEC
4. Color Sequence:
   grey
5. Cross Area:0.09mm²(AWG28/7)
6. Insulation hardness: 94 Shore (A)
7. Coat Material: PVC,transparente
8. Coat hardness :91 Shore(A)
9. Pitch: R=1.27 mm
10. Bridge: S=0.20-0.25 mm
11. Insulation Diameter: d=0.80 mm
12. Coat Diameter: D=1.00 mm

ELECTRICAL
1. Conductor Resistance : <216 Ω/km
2. Insulation Resistance: >100 MΩ
3. Operating voltage : < 300V/50Hz
4. Test voltage:1500V/50Hz
5. Capacitance: 60pF/m

ENVIRONMENT
1. Temperature Range: -30°C to +105°C
2. Flammability Rating:UL94 VW-1

RoHS compliant

Scale	FREE						Date	Name	Customer-No.
TOLERANCE						Drawn	29.09.1997	J.Schulte	
X.	±X					Approved	13.02.2009	Meng	ASSMANN WSW-No. AWG 28-xx/G
X.X	±X								
X.XX	±X								
DIM	TOL	②	Redraw	13.02.2009	Dean				Drawing-No. ASS 0135 CA rev02
X.°	±X°								
X.X°	±X°	①	Drawn	21.08.2003	J.Schulte				
Angle	TOL	Id.	Modification	Date	Name				Replace / Sheet

ASSMANN WSW components

KKXXX