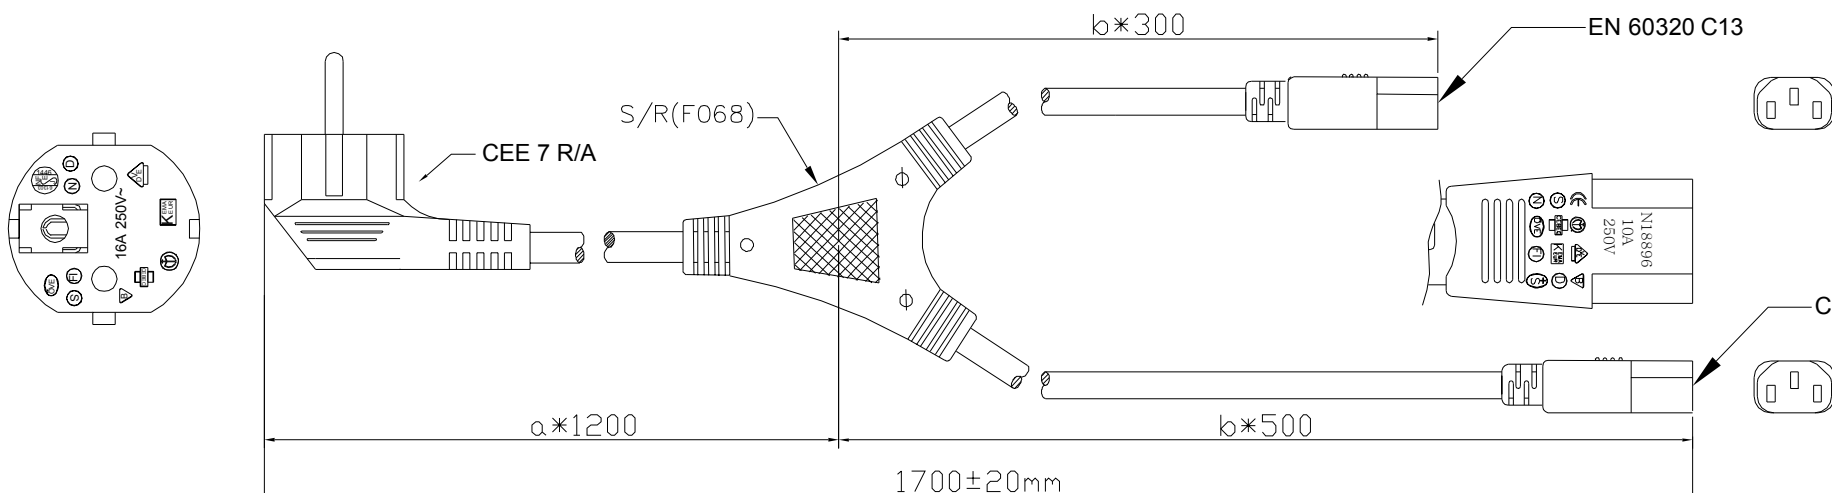



1		2		3		4		5		6		7																																													
										Signature Sean		Revision History For Bulk Production																																													
												Date Aug.30,2012																																													
												Rev. 01																																													
A	RoHS Compliant												A																																												
B													B																																												
C													C																																												
D													D																																												
E	NOTES: 1. CABLE a: VDE APPROVED H05VV-F 3G 1.0MM2 JACKET COLOR: BLACK CABLE MUST PRINT: ◁VDE▷ H05VV-F 3G1.0 MM2 CABLE b: VDE APPROVED H05VV-F 3G 0.75MM2 JACKET COLOR: BLACK CABLE MUST PRINT: ◁VDE▷ H05VV-F 3G 0.75MM2 2.CONNECTOR: P1 : CEE 7/7 Plug, R/A, CRIMP, NICKEL PLATED TERMINAL P2 : IEC C13, CRIMP, NICKEL PLATED TERMINAL 3.HOOD: MOLDED TYPE,PVC 45P,COLOR:BLACK. 4.PLUG INSERT: PBT, COLOR: WHITE 5.ELECTRICLE TEST: (1)100% OPEN SHORT & MIS WIRE TEST. (2)HIGH-POT: AC2500V,2S. (3)SKIN HIGH-POT: AC 4500V, 2S (4)LEAKAGE CURRENT: 1.0mA												E																																												
F	Cross Section: 												F																																												
G	<table><tr><th colspan="2">Conductor</th><th colspan="3">Insulation</th><th>Jacket</th><th rowspan="2">Overall Diameter</th></tr><tr><th>MM²</th><th>Construction</th><th>Diameter</th><th>Min.Thick</th><th>AVG.Thick</th><th>Min.Thick</th></tr><tr><td>0.75</td><td>24/0.20mm</td><td>2.4±0.05mm</td><td>0.44mm</td><td>0.6mm</td><td>0.58mm</td><td>6.8 ± 0.1mm</td></tr><tr><td>1.00</td><td>32/0.20mm</td><td>2.5± 0.05mm</td><td>0.44mm</td><td>0.6mm</td><td>0.58mm</td><td>7.0 ± 0.1mm</td></tr></table>												Conductor		Insulation			Jacket	Overall Diameter	MM ²	Construction	Diameter	Min.Thick	AVG.Thick	Min.Thick	0.75	24/0.20mm	2.4±0.05mm	0.44mm	0.6mm	0.58mm	6.8 ± 0.1mm	1.00	32/0.20mm	2.5± 0.05mm	0.44mm	0.6mm	0.58mm	7.0 ± 0.1mm	<table><tr><td></td><td>Date</td><td>Name</td><td>Part No.</td></tr><tr><td>Drawn by</td><td>Aug,30,2012</td><td>Sean</td><td>AK-440401-017-S</td></tr><tr><td>Checked by</td><td></td><td></td><td>EAN:4016032311935</td></tr><tr><td>Approved by</td><td></td><td></td><td></td></tr></table>		Date	Name	Part No.	Drawn by	Aug,30,2012	Sean	AK-440401-017-S	Checked by			EAN:4016032311935	Approved by				G
Conductor		Insulation			Jacket	Overall Diameter																																																			
MM ²	Construction	Diameter	Min.Thick	AVG.Thick	Min.Thick																																																				
0.75	24/0.20mm	2.4±0.05mm	0.44mm	0.6mm	0.58mm	6.8 ± 0.1mm																																																			
1.00	32/0.20mm	2.5± 0.05mm	0.44mm	0.6mm	0.58mm	7.0 ± 0.1mm																																																			
	Date	Name	Part No.																																																						
Drawn by	Aug,30,2012	Sean	AK-440401-017-S																																																						
Checked by			EAN:4016032311935																																																						
Approved by																																																									
H	ASSMANN Electronic GmbH STxxxxx												<table><tr><td colspan="3">Title</td></tr><tr><td colspan="3">CEE 7/7 R/A - 2x IEC C13 Power Cord, 1.7M</td></tr><tr><td>Scale</td><td>N/A</td><td rowspan="2">Sheet 1/2</td></tr><tr><td>Unit</td><td>MM</td></tr></table>	Title			CEE 7/7 R/A - 2x IEC C13 Power Cord, 1.7M			Scale	N/A	Sheet 1/2	Unit	MM	H																																
Title																																																									
CEE 7/7 R/A - 2x IEC C13 Power Cord, 1.7M																																																									
Scale	N/A	Sheet 1/2																																																							
Unit	MM																																																								
1		2		3		4		5		6		7																																													

	1	2	3	4	5	6	7														
A	Package Details RoHS Compliant					Signature Revision History Date Rev.		A													
						Seal For Bulk Production Aug.30,2012 01															
B	Single Cable <table border="1"> <tr> <th>P/N</th> <th>Cable Length</th> <th>Rolling Size (Single Cable)</th> <th>Polybag Type (Single Cable)</th> <th>Bag Size (Single Cable)</th> <th>Article Weight (Single Cable)</th> </tr> <tr> <td>AK-440401-017-S</td> <td>1.7M</td> <td>180mm Max.</td> <td>Ordinary Polybag (Heat Sealed)</td> <td>250*200*0.05mm</td> <td>kg</td> </tr> </table>					P/N	Cable Length	Rolling Size (Single Cable)	Polybag Type (Single Cable)	Bag Size (Single Cable)	Article Weight (Single Cable)	AK-440401-017-S	1.7M	180mm Max.	Ordinary Polybag (Heat Sealed)	250*200*0.05mm	kg	Single Cable			B
P/N	Cable Length	Rolling Size (Single Cable)	Polybag Type (Single Cable)	Bag Size (Single Cable)	Article Weight (Single Cable)																
AK-440401-017-S	1.7M	180mm Max.	Ordinary Polybag (Heat Sealed)	250*200*0.05mm	kg																
C	Inner Packing Unit <table border="1"> <tr> <th>P/N</th> <th>Cable Length</th> <th>Quantity (Inner Packing Unit)</th> <th>Type (Inner Packing Unit)</th> <th>Size (Inner Packing Unit)</th> <th>Weight (Inner Packing Unit)</th> </tr> <tr> <td>AK-440401-017-S</td> <td>1.7M</td> <td>10 pcs</td> <td>Polybag (Heat Sealed)</td> <td>400*300*0.05mm</td> <td>kg</td> </tr> </table>					P/N	Cable Length	Quantity (Inner Packing Unit)	Type (Inner Packing Unit)	Size (Inner Packing Unit)	Weight (Inner Packing Unit)	AK-440401-017-S	1.7M	10 pcs	Polybag (Heat Sealed)	400*300*0.05mm	kg				C
P/N	Cable Length	Quantity (Inner Packing Unit)	Type (Inner Packing Unit)	Size (Inner Packing Unit)	Weight (Inner Packing Unit)																
AK-440401-017-S	1.7M	10 pcs	Polybag (Heat Sealed)	400*300*0.05mm	kg																
D	Carton Details <table border="1"> <tr> <th>P/N</th> <th>Cable Length</th> <th>Quantity (Carton)</th> <th>Measurement (Carton)</th> <th>N.W. (Carton)</th> <th>G.W. (Carton)</th> </tr> <tr> <td>AK-440401-017-S</td> <td>1.7M</td> <td>50 pcs</td> <td>CM</td> <td>kg</td> <td>kg</td> </tr> </table>					P/N	Cable Length	Quantity (Carton)	Measurement (Carton)	N.W. (Carton)	G.W. (Carton)	AK-440401-017-S	1.7M	50 pcs	CM	kg	kg	Inner Packing Unit			D
P/N	Cable Length	Quantity (Carton)	Measurement (Carton)	N.W. (Carton)	G.W. (Carton)																
AK-440401-017-S	1.7M	50 pcs	CM	kg	kg																
E						Inner Packing Unit			E												
F						Inner Packing Unit			F												
G						Inner Packing Unit			G												
H	* "ROTTERDAM" is for Sea Freight shipment * "COLOGNE" is for Air Freight shipment * "LUDENSCHIED" is for Fedex or UPS shipment					Part No. AK-440401-017-S EAN:4016032311935 Title ASSMANN Electronic GmbH Scale N/A Sheet 2/2			H												
	1	2	3	4	5	6	7														