



## data sheet

### BENEFITS

#### **USB Backhaul**

Support for carrier LTE / 3G backhaul with simple driver provisioning

#### **Dual-band selectable**

Dual-band selectable (2.4 GHz or 5 GHz) with a click of a button

#### **High concurrent client capacity**

Capable of supporting up to 256 concurrent Wi-Fi clients dependent on backhaul bandwidth

#### **Extended range with transmit beamforming (TxBF)**

Increases the signal gain by up to 3 dB and increases client reliability and performance

#### **Advanced feature set maximizes performance/capacity**

Integrated airtime fairness and capacity-driven channel selection minimizes interference and maximizes capacity

#### **Unobtrusive lightweight design for fast and easy installation**

Ceiling, wall or desktop mountable with integrated mounting features for easy deployment anywhere

#### **Best in class channel selection with ChannelFly™**

Capacity-driven channel selection predicts and automatically selects best performing channels based on statistical, real-time capacity analysis of all RF channels

#### **Flexible deployment options**

SmartCell™ 200 or controller-based deployment with any Ruckus ZoneDirector

# ZoneFlex™ 7321-U

## SMART DUAL-BAND SELECTABLE 802.11n ACCESS POINT

### Unmatched Price/Performance in a Dual-Band 802.11n Access Point

The ZoneFlex 7321-U is the ideal solution for carrier class Mi-Fi. For service providers who wish to monetize spectrum and for Internet providers, the 7321-U can be quickly and easily deployed in environments where there is limited wired connectivity. Also perfectly suited for transportation deployments, such as trains, busses, boats etc., the 7321-U can leverage LTE/3G mobility to provide seamless Wi-Fi to passengers or employees. The 7321-U is also an ideal solution for retail vendors wishing to back-up their existing PoS systems in cases of WAN failure or downtime as well as many other enterprise vendors with the need for a WAN back-up system.

The Ruckus ZoneFlex 7321-U is a two spatial stream (2x2:2), dual-band selectable access point (AP) that delivers the highest performance at the most competitive price point in the market.

Unlike other APs in its class, ZoneFlex 7321-U supports transmit beamforming (TxBF) to increase signal gain of up to 3 dB.

In an ultra sleek, unobtrusive and lightweight form factor (7 oz. / 198 g.), the ZoneFlex 7321-U supports up to 256 concurrent clients (performance is dependent on backhaul bandwidth).

The ZoneFlex 7321-U comes with a myriad of advanced features that maximizes Wi-Fi performance and capacity including airtime fairness, and capacity-driven auto channel selection (ChannelFly™).

When used with the Ruckus ZoneDirector line of Smart WLAN controllers, the ZoneFlex 7321-U supports the full complement of Smart O/S features such as, guest access, per user thresholds and Dynamic Pre-Shared Keys.

# ZoneFlex™ 7321-U

## SMART DUAL-BAND SELECTABLE 802.11n ACCESS POINT

### Best price/performance of any entry-level AP

The ZoneFlex 7321-U offers the industry's best price/performance of any 2x2:2 entry-level AP in its class, making it ideal for single AP deployments, SMB requirements and emerging countries where high-capacity/value are essential.

### ChannelFly for optimal wireless performance

The ZoneFlex 7321-U uniquely supports an innovative approach to automatic channel selection called ChannelFly. A capacity-driven approach to auto channel selection based on observed channel traffic, ChannelFly uses statistic modeling to learn and select the best performing RF channel. It relies on actual capacity on all channels across both 2.4 and 5 GHz frequencies to automatically move clients (using 802.11h) to a better channel with less interference and more capacity.

### Simplified user security with Dynamic PSK

With the ZoneDirector, the ZoneFlex 7321-U radically simplifies Wi-Fi security for users and IT administrators through the use of Dynamic Pre-Shared Keys. Once users successfully authenticate, a unique pre-shared encryption key is generated and automatically installed on the user's device — along with the requisite SSID. This eliminates the tedious configuration of wireless settings and eases the burden of installing the same PSK (that could be easily compromised) on every user device.

### Differentiated services with multiple SSIDs

Up to 8 discrete SSIDs are supported within the Ruckus ZoneFlex 7321-U, each with unique broadcast, QoS, security and management parameters. Up to 2,048 discrete WLANs can be created and mapped to the same or different AP or VLAN. This lets hot-zone operators easily offer tiered services to different users or traffic types. Enterprises can use this feature to differentiate guest, contractor and employee access policies or to segment different traffic types.

### Advanced WLAN applications with Smart/OS

With the Ruckus ZoneDirector Smart WLAN controller, the ZoneFlex 7321-U supports a wide range of value-added applications such as guest networking, Smart Wireless Meshing, Dynamic PSK, hotspot authentication, wireless intrusion prevention and many more. WLANs can be grouped and shared by specific APs. In a centrally managed configuration, the ZoneFlex 7321-U works with a variety of authentication servers such as AD, LDAP, and RADIUS.

### High performance hot spots

The 7321-U uniquely supports the WISPr protocol to provide universal authentication method or UAM (browser-based login at a captive portal), walled garden, time-based user session control, and additional RADIUS attributes for hotspot service settings.

**Auto Recovery**  AP reboots if disconnected from ZoneDirector for more t

---

### Access Point USB Software Packages

This table lists supported Access Point USB Software Packages. Click Browse to add a Software Package.

USB Device	VID	PID	Version	Actions
Verizon Wireless 4G LTE USB Modem 551L	0x1410	0xb001	1.0	<a href="#">Delete</a>
ATT USBConnect Momentum 4G LTE	0x0f3d	0x68aa	1.0	<a href="#">Delete</a>
Huawei E392 4G LTE USB Storage Device	0x12d1	0x1505	1.0	<a href="#">Delete</a>
Huawei E392 4G LTE USB Modem Device	0x12d1	0x1506	1.0	<a href="#">Delete</a>
ATT USBConnect Momentum 4G LTE	0x1199	0x0fff	1.0	<a href="#">Delete</a>

Import a new USB Software Package

As part of a centrally controlled wireless LAN, the ZoneFlex 7321-U is managed through an highly intuitive and simply to use graphical, point-and-click Web interface. The dashboard gives administrators a single and comprehensive view of the state of the wireless LAN. Above is a snapshot of the simple USB provisioning capability.

# ZoneFlex™ 7321-U

## SMART DUAL-BAND SELECTABLE 802.11n ACCESS POINT

### FEATURES


- USB backhaul with simple push provisioning for drivers
- Transmit beamforming for extended range
- Single radio with selectable 2.4 GHz or 5 GHz option for maximum flexibility
- Airtime fairness to optimize capacity and performance
- ChannelFly - advanced channel selection and interference mitigation
- Managed via SmartCell™ 200 or ZoneDirector
- Standard 802.3 af Power over Ethernet (PoE)
- Unobtrusive design with integrated mounting
- Eight BSSIDs with unique QoS and security policies
- Advanced QoS packet classification and automatic priority for latency sensitive traffic
- Limited lifetime warranty

- *Dynamic, per-user rate-limiting for hotspot WLANs\**
- *WEP, WPA-PSK (AES), 802.1X support for RADIUS and Active Directory\**
- *Zero-IT and Dynamic PSK\**
- *Admission control / client load balancing\**
- *Captive portal and guest accounts\**


\*when used with Ruckus ZoneDirector controller




### Purchased Spectrum: 3G/LTE/WiMax

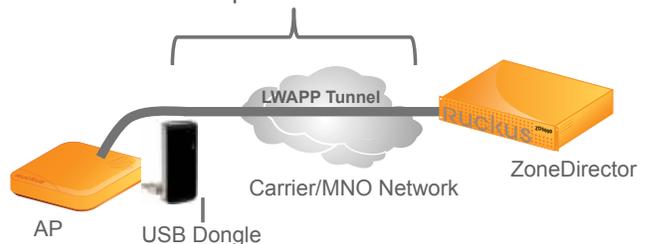

### Monetize Carrier or Mobile Operator's Spectrum

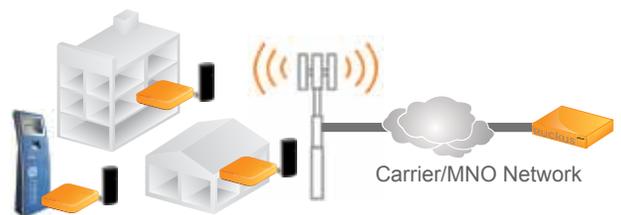

Use Cases: Redundancy for Retail, Restaurant, Business, Hot Spot, Kiosk, for LAN backup and Temporary Networks

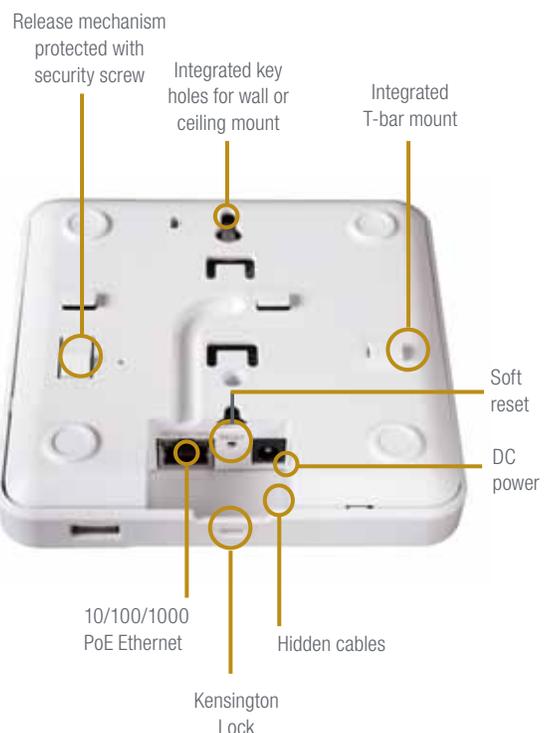

## Specifications

PHYSICAL CHARACTERISTICS	
<b>POWER</b>	<ul style="list-style-type: none"> <li>12V DC, 12.95 W</li> <li>Power over Ethernet Class 3</li> </ul>
<b>PHYSICAL SIZE</b>	<ul style="list-style-type: none"> <li>13 cm (5.1") (L), 13 cm (5.1") (W), 2.8 cm (1.1") (H)</li> </ul>
<b>WEIGHT</b>	<ul style="list-style-type: none"> <li>198 g (7 oz.)</li> </ul>
<b>ETHERNET PORTS</b>	<ul style="list-style-type: none"> <li>1 port, auto MDX, auto-sensing 10/100/1000 Mbps, RJ-45</li> <li>Power over Ethernet (802.3af)</li> </ul>
<b>LOCK OPTION</b>	<ul style="list-style-type: none"> <li>Integrated Kensington lock</li> </ul>
<b>ENVIRONMENTAL CONDITIONS</b>	<ul style="list-style-type: none"> <li>Operating Temperature: 32°F (0°C) – 122°F (50°C) with PoE</li> <li>32°F (0°C) – 104°F (40°C) with AC</li> <li>Operating humidity: 10% – 95% non-condensing</li> </ul>
<b>POWER DRAW</b>	<ul style="list-style-type: none"> <li>2W minimum</li> <li>3W average</li> <li>6.7W peak</li> </ul>

PERFORMANCE AND CAPACITY	
<b>CONCURRENT STATIONS</b>	<ul style="list-style-type: none"> <li>Up to 256 (Limited by backhaul)</li> </ul>
<b>SIMULTANEOUS CLIENTS</b>	<ul style="list-style-type: none"> <li>Up to 20</li> </ul>

APPLICATIONS	
<b>HOTSPOT</b>	<ul style="list-style-type: none"> <li>WISPr</li> </ul>
<b>VOICE</b>	<ul style="list-style-type: none"> <li>802.11e/WMM</li> <li>U-APSD</li> </ul>

NETWORK ARCHITECTURE	
<b>IP</b>	<ul style="list-style-type: none"> <li>IPv4, IPv6, dual-stack</li> </ul>
<b>VLANs</b>	<ul style="list-style-type: none"> <li>802.1Q (1 per BSSID or dynamic, per user based on RADIUS)</li> <li>Port-based</li> </ul>
<b>802.1X FOR ETHERNET PORTS</b>	<ul style="list-style-type: none"> <li>Authenticator</li> <li>Supplicant</li> </ul>
<b>TUNNELING</b>	<ul style="list-style-type: none"> <li>L2TP, PPPoE</li> </ul>

MULTIMEDIA AND QUALITY OF SERVICE	
<b>802.11e/WMM</b>	<ul style="list-style-type: none"> <li>Supported</li> </ul>
<b>SOFTWARE QUEUES</b>	<ul style="list-style-type: none"> <li>Per traffic type (4), per client</li> </ul>
<b>TRAFFIC CLASSIFICATION</b>	<ul style="list-style-type: none"> <li>Automatic, heuristics and TOS based or VLAN-defined</li> </ul>
<b>RATE LIMITING</b>	<ul style="list-style-type: none"> <li>Dynamic, per-user or per-WLAN</li> </ul>

MANAGEMENT	
<b>DEPLOYMENT OPTIONS</b>	<ul style="list-style-type: none"> <li>Managed by ZoneDirector</li> <li>Managed by SmartCell™ 200</li> </ul>
<b>CONFIGURATION</b>	<ul style="list-style-type: none"> <li>Web user interface (HTTP/S)</li> <li>CLI (Telnet/SSH), SNMP v1, 2, 3</li> </ul>
<b>AUTO SOFTWARE UPDATES</b>	<ul style="list-style-type: none"> <li>FTP or TFTP, remote auto available</li> </ul>

WI-FI	
<b>STANDARDS</b>	<ul style="list-style-type: none"> <li>802.11b/g/a/n</li> </ul>
<b>SUPPORTED DATA RATES</b>	<ul style="list-style-type: none"> <li>54,48,36,24,18,12,11,9,6,5.5,2,1 Mbps</li> <li>802.11n data rates</li> </ul>
<b>AUTO CHANNEL SELECTION</b>	<ul style="list-style-type: none"> <li>Supported</li> </ul>
<b>RF POWER OUTPUT</b>	<ul style="list-style-type: none"> <li>Max transmit power: 26 dBm (2.4 GHz); 24 dBm (5.0 GHz)</li> <li>Country-specific power settings are configurable</li> </ul>
<b>TRANSMIT POWER CONTROL</b>	<ul style="list-style-type: none"> <li>Supported</li> </ul>
<b>BSSID</b>	<ul style="list-style-type: none"> <li>Up to eight</li> </ul>
<b>POWER SAVE</b>	<ul style="list-style-type: none"> <li>Supported</li> </ul>
<b>WIRELESS SECURITY</b>	<ul style="list-style-type: none"> <li>WEP, WPA-PSK, WPA-TKIP, WPA2 AES, 802.11i</li> <li>Authentication via 802.1X with the ZoneDirector, local authentication database, support for RADIUS and ActiveDirectory</li> </ul>
<b>CERTIFICATIONS</b>	<ul style="list-style-type: none"> <li>U.S., Europe, Australia, Brazil, Canada, Colombia, Hong Kong, India, Israel, Malaysia, Mexico, New Zealand, Philippines, Singapore, Taiwan, Thailand, Vietnam</li> <li>WEEE/RoHS compliance</li> <li>EN 60601-1-2</li> <li>Wi-Fi Alliance Certification (Wi-Fi Certified™)</li> </ul>

## Product Ordering Information

MODEL	DESCRIPTION
<b>ZoneFlex 7321-U 802.11n Smart Wi-Fi Access Point</b>	
<b>901-7321-XX00</b>	Single-port centrally managed AP, no power adapter
<b>Optional Accessories</b>	
<b>902-0162-XXYY</b>	PoE injector (264 VAC 47-63 Hz)
<b>902-0173-XX10</b>	Power Supply (264 VAC 47-63 Hz)

PLEASE NOTE: When ordering ZoneFlex Indoor APs, you must specify the destination region by indicating -US, -IL, or -WW instead of XX. When ordering PoE injectors or power supplies, you must specify the destination region by indicating -US, -EU, -AU, -BR, -CN, -IN, -JP, -KR, -SA, -UK, or -UN instead of -XX.