beek

4 Ports HDMI Splitter 4K@30Hz, 1080P@60Hz, 4 Ports

BS-VSP-HA04



and a start User Manual

VER 1.0

www.beek.com.tr

1

Thank you for purchasing this product

For optimum performance and safety, please read these instructions carefully before connecting operating or adjusting this product. Please keep this manual for future reference.

Package Contents

- 1 HDMI Splitter
- 1 Power Adapter
- 1 User Manual

1. Introduction

2

The Beek BS-VSP-HA04 4 Ports HDMI Splitter is perfect solution to send one HDMI source to four HDMI displays at the same time. The resolution is up to 1920x1080@60Hz. Support 3D.

2. Features

 Copy one HDMI source to four HDMI displays at the same time;

- Resolution 4K@30Hz or 1080P@60Hz;
- HDMI 1.4 HDCP 1.4 compliant;
- Supports 3D, Deep Color;
- Plug and play

3. Specifications

Function	Description
Video Input	
Interface	HDMI Type A (F) x1, black
Impedance	100Ω
Max. Distance	3m by 4K@30Hz, 15m by 1080P@60Hz
Video Output	
Interface	HDMI Type A (F) x4, black
Impedance	100Ω
Max. Distance	3m by 4K@30Hz, 15m by 1080P@60Hz

Video	
Max. Data Rate	10.2Gbps (3.4Gbps / lane)
Max. Pixel Clock	340MHz
Compliance	HDMI 1.4 HDCP 1.4
Max. Resolution	4K@30Hz, 1920 x 1080 @ 60Hz (4:4:4)
Audio	
Input	HDMI Type A (F) x1, black
Output	HDMI Type A (F) x4, black
Environmental	
Operating Temp.	0 - 40°C
Humidity	5-85% RH, Non-Condensing
Physical Properties	
Housing	Metal
Weight	260g
Dimension (L x W x H)	17.7 x 6.7 x 2.8cm
Power Adapter	Input: AC 100 – 240V
	50/60Hz; Output: DC 5V/1A

4. Components

4.1 Front Panel

Name	Function Description
Power	LED for Power On status
1 - 4	LEDs for output connection status

5


4

4.2 Rear Panel



Name	Function Description
DC IN	Connects with power adapter
OUTPUT	Connects with HDMI displays
INPUT	Connects with HDMI source device

5. Installation Diagram

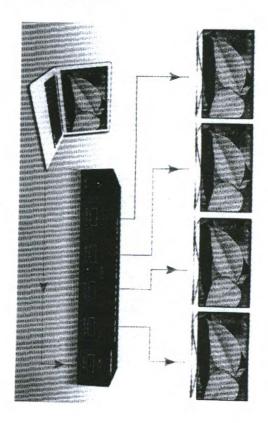

7