

REACH&RoHS Compliant

REVISION RECORD MODIFICATIONS


NEW

DATE

2020/01/07

REV.

A/0

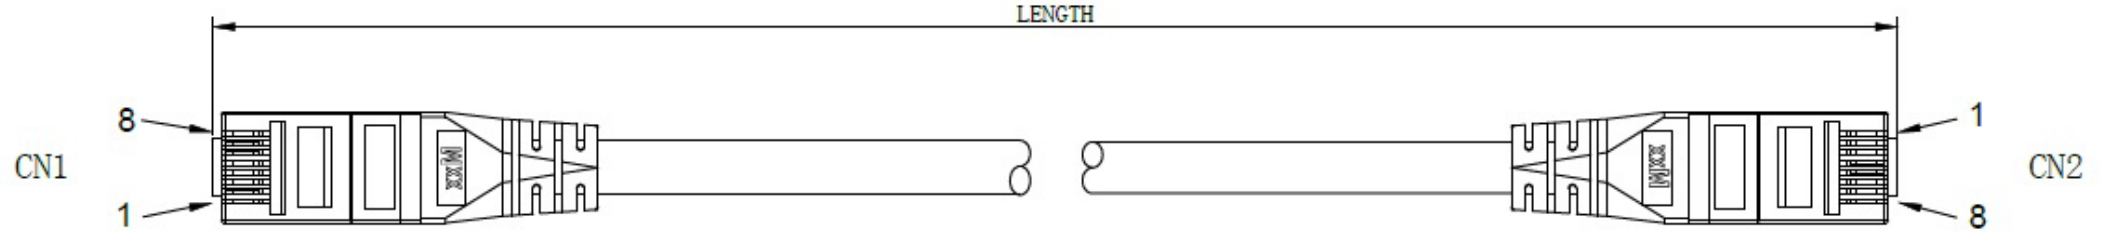


WIRING DIAGRAM

CN1(568B)

CN2(568B)

WHITE/ORANGE	1	1	WHITE/ORANGE
ORANGE	2	2	ORANGE
WHITE/GREEN	3	3	WHITE/GREEN
GREEN	6	6	GREEN
BLUE	4	4	BLUE
WHITE/BLUE	5	5	WHITE/BLUE
WHITE/BROWN	7	7	WHITE/BROWN
BROWN	8	8	BROWN

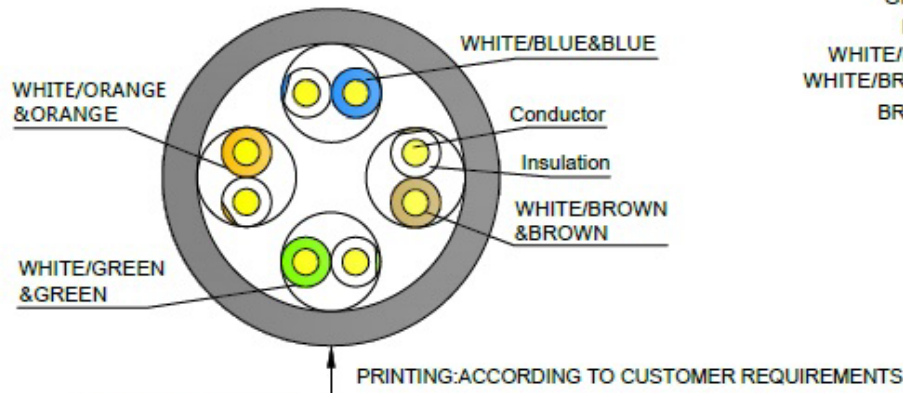

DESCRIPTIONS:

. CABLE: CAT 5E U/UTP STRANDED WIRES AWG26

. PLUG: RJ45 8P8C 3U"-50" GOLD-PLATED ON CONTACT AREA TRANSPARENT COLOR

. MOLDING: PVC MOLDING COLOR : ACCORDING TO CUSTOMER REQUIREMENTS


. WIRES CONNECTION BASE ON TIA/EIA 568B

. TEST STANDARD ACC TO ISO/IEC 11801 CAT.5E CLASS D CHANNEL LINK

. PACKING: ACCORDING TO CUSTOMER REQUIREMENTS

. CABLE LENGTH: ***** METERS

LENGTH	
0.15m+/-10mm	7.5m+/-75mm
0.25m+/-10mm	10m+/-100mm
0.5m+/-10mm	15m+/-150mm
1.0m+/-10mm	20m+/-200mm
1.5m+/-15mm	25m+/-250mm
2.0m+/-20mm	30m+/-300mm
3.0m+/-30mm	40m+/-400mm
5.0m+/-50mm	50m+/-500mm

DRAW NO.		PRODUCT NAME	Cat5E U/UTP 8P8C/M TO 8P8C/M		
CUSTOMER			VIEW	Tolerance	
ITEM NO.	U/UTP 5E 26AWG			X.	±1.00
				X. X	±0.50
APPOBY		CHECKBY	DRAWNBY	UNTT	MM
K				Page	1 of 1