

QuSpot for RUT241/RUT240/RUT200/RUT230

Integrated multi-band LTE omni antenna + WiFi omni antenna + place to install Teltonika RUT241, RUT240 or 230 (All-in-one)

QuSpot omnidirectional LTE antenna for Teltonika **RUT241, RUT240, RUT230 or RUT200 routers** is a perfect outdoor device for mobile and fixed installations e.g. CCTV, hotspots, industrial areas, campervans, ships etc.. In addition to having omnidirectional, multi-band LTE antennas, **it has also embedded omnidirectional Wi-Fi antenna**. if you use RUT241, RUT240, RUT230 or RUT200 with QuSpot antenna, you get an integrated complete solution with embedded router and multi band antennas in one enclosure.

4G
LTE**Wi Fi** 2.4GHz
694-2700MHz
6 dBi
OMNI
DIRECTIONAL
IP 67
-40° TO +80°

OUTDOOR ANTENNA WORKS IN **ANY**
WEATHER CONDITIONS, IP67



ANTENNA **PERFECTLY MATCHED** WITH
THE ROUTER



WALL OR MAST MOUNTING SYSTEM



MADE IN **EUROPE**



LTE ANTENNA SPECIFICATION

FREQUENCY	694 - 960 MHz 1.7 - 2.2 GHz 2.2 - 2.7 GHz
SUPPORTED LTE/5G BANDS	1, 2, 3, 4, 5, 7, 8, 9, 10, 12, 13, 14, 17, 18, 19, 20, 25, 26, 27, 28, 29, 30, 33, 34, 35, 36, 37, 38, 39, 40, 41, 44, 53, 65, 66, 67, 68, 69, 85, 103, n80, n81, n82, n83, n84, n86, n89, n90, n95, n97, n98, n100, n101, n256
GAIN	694 - 960 MHz : 2 dBi 1.7 - 2.2 GHz : 2 dBi 2.2 - 2.7 GHz : 4 dBi
VSWR	<1.60, max <2.00
BEAMWIDTH	360°/35° ±5°
POLARIZATION	Vertical
IMPEDANCE	50 Ω

WI-FI ANTENNA SPECIFICATION

FREQUENCY	2.4 - 2.5 GHz
GAIN	6 dBi
VSWR	<1.70, max <2.00
BEAMWIDTH	360°/25° ±5°
POLARIZATION	Vertical
IMPEDANCE	50 Ω

MECHANICAL SPECIFICATION

MATERIALS	ABS, aluminum, PTFE
CONNECTOR TYPE	RJ45
INGRESS PROTECTION	IP67
DIMENSIONS	160 x 160 x 240 mm 6.3 x 6.3 x 9.45 inch
WEIGHT	1.5 kg 3.31 lbs
OPERATING TEMPERATURE	From -40°C to 80°C From -40°F to 176°F

FREQUENCY BANDS

LTE / 4G GSM	581213141718 617 MHz 19202627282944 960 MHz 676885103n81n82n83 n89100
LTE / 4G UMTS	1710 MHz 123491025 2170 MHz 333435363739n80 n84n86n95n98n101
LTE / 4G WCS DARS	2300 MHz 3040n97 2400 MHz

LTE / 4G

2400
MHz

7

38

41

53


69

n90


2700
MHz

PLOTS


VSWR for Wi-Fi antenna

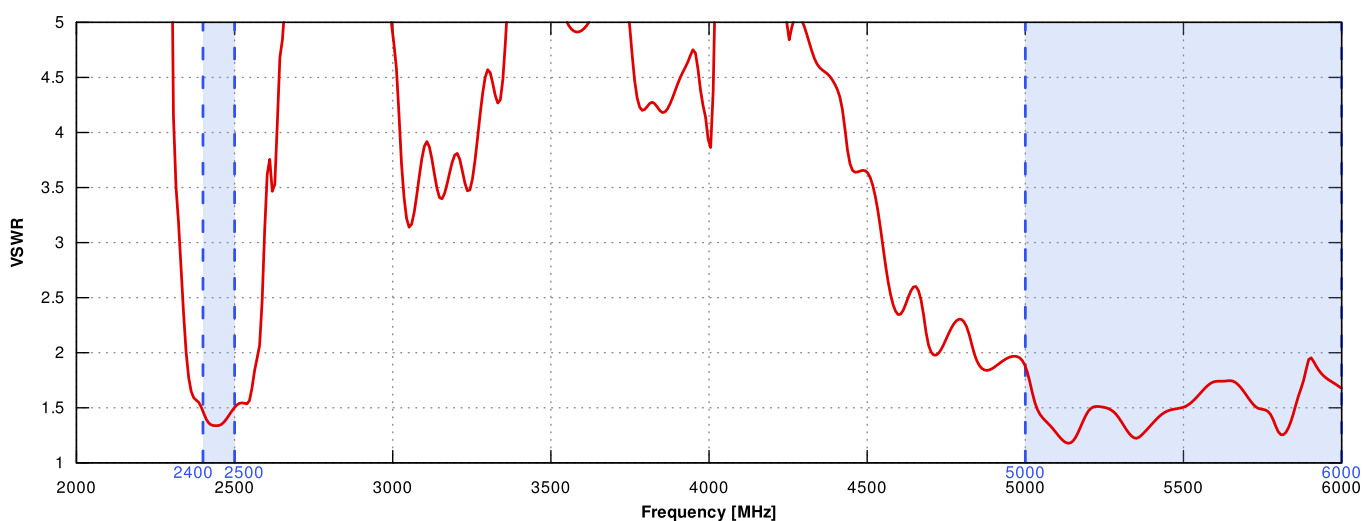


VSWR for LTE antenna

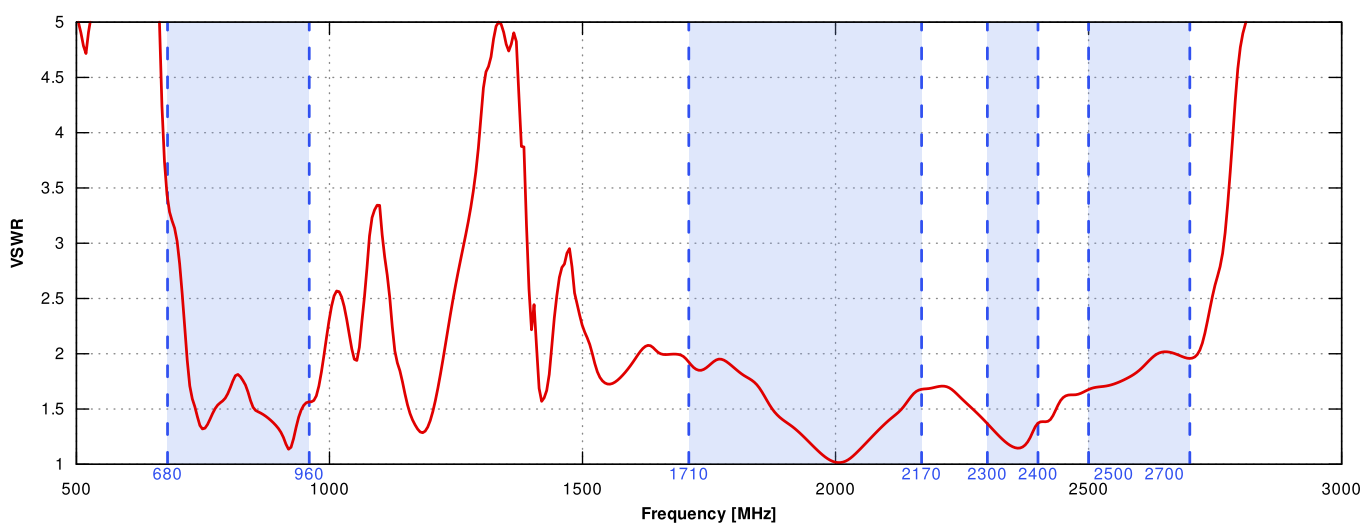



Gain for Wi-Fi antenna

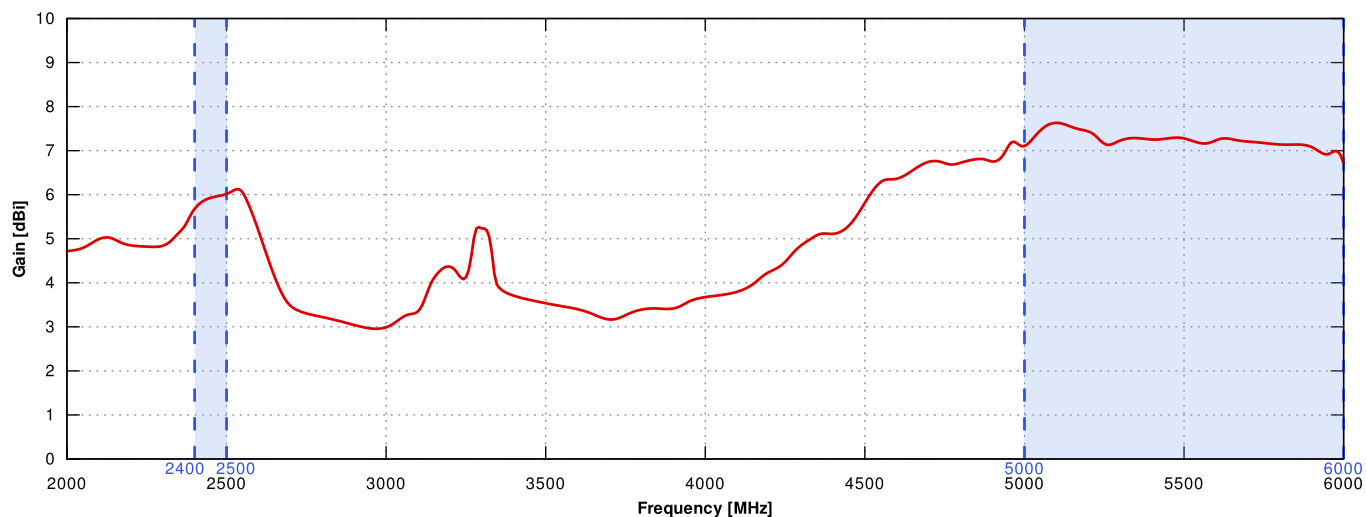



Gain for LTE antenna

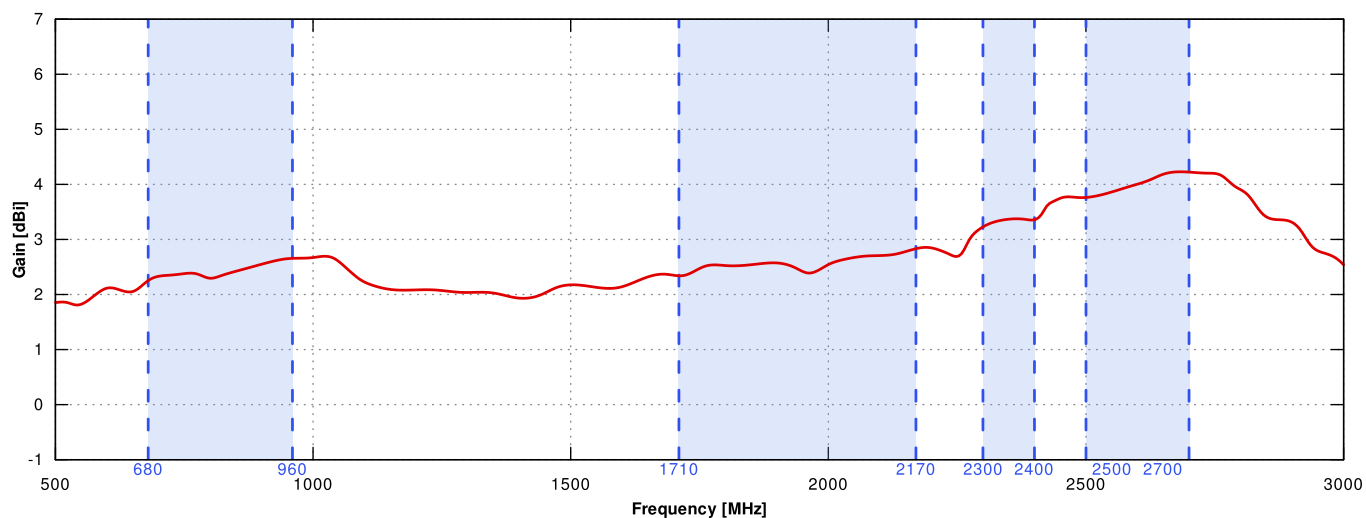



LTE from 700MHz to 900MHz

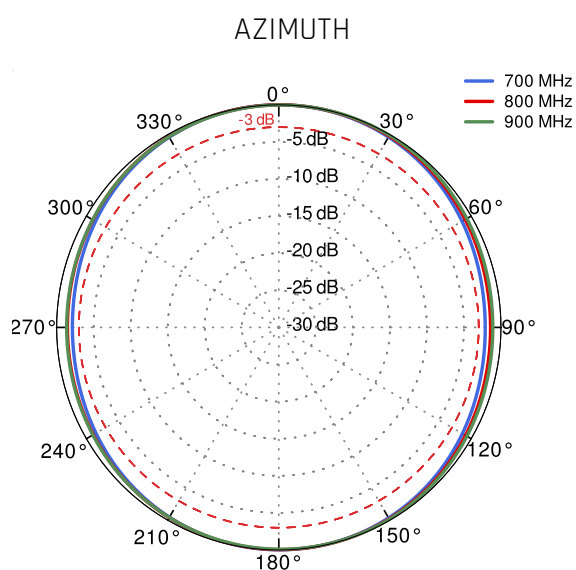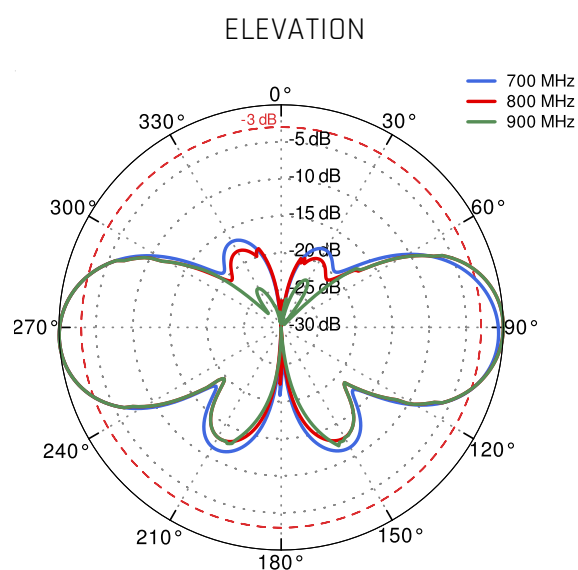



LTE from 1.71GHz to 2.17GHz

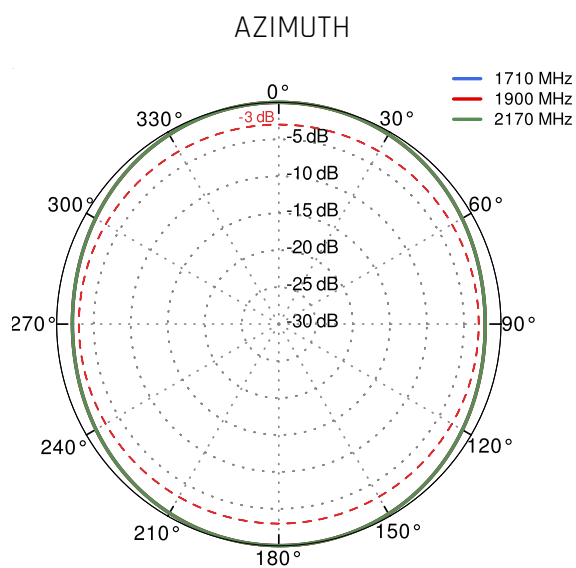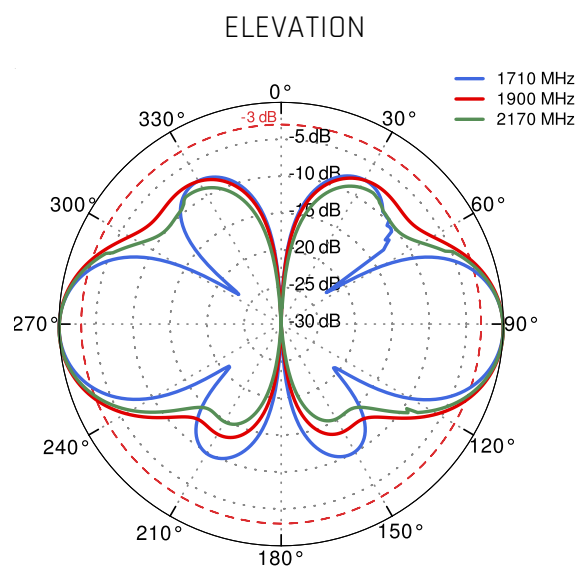

LTE from 2.3GHz to 2.7GHz

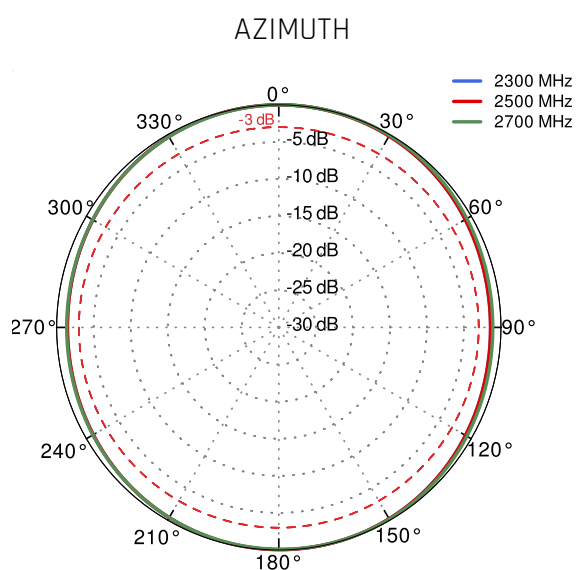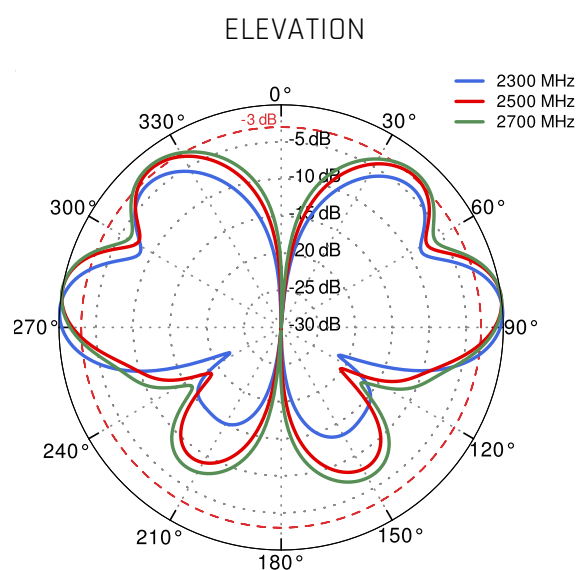

Wi-Fi 2.4GHz and 5GHz

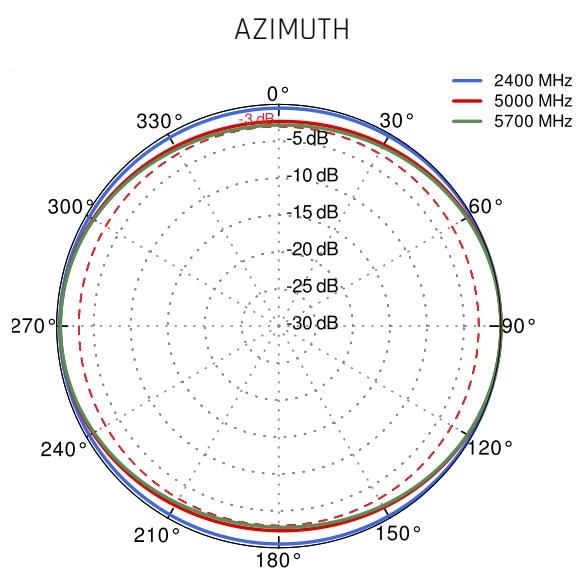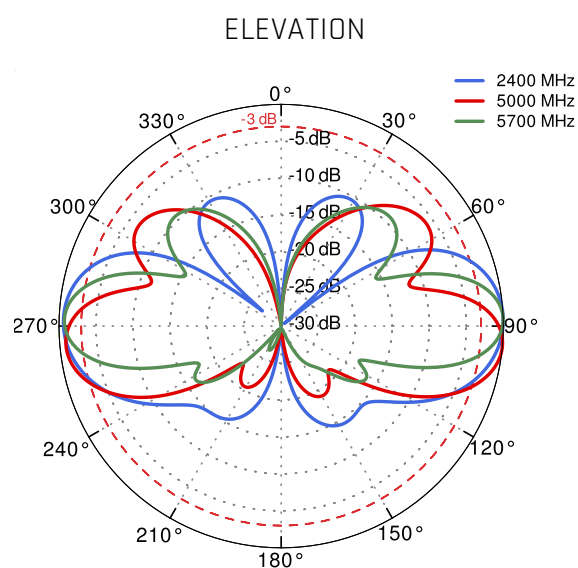

DIMENSIONS

